




# OIL ANALYSIS REPORT

Sample Rating Trend

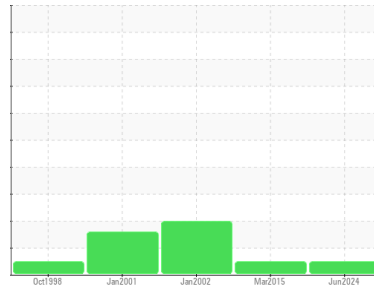

**NORMAL**



Area

**2**  
Machine Id  
**02-0105-000-000 FACE CONV TO SCREEN (2M74)**

Component

**2 Gearbox**

Fluid

**SHELL OMALA S4 GXV 220 (1 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0945384</b>	WC934677	WC554368
Sample Date	Client Info	<b>26 Jun 2024</b>	16 Mar 2015	24 Jan 2002
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
PQ	ASTM D8184*	<b>45</b>	12	---	
Iron	ppm	ASTM D5185(m) >200	<b>105</b>	88	7
Chromium	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m) >100	<b>0</b>	0	1
Copper	ppm	ASTM D5185(m) >200	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >25	<b>0</b>	0	2
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	<1	---

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	<b>16</b>	11	<1
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	1
Calcium	ppm	ASTM D5185(m)	<b>7</b>	22	<1
Phosphorus	ppm	ASTM D5185(m)	<b>370</b>	293	320
Zinc	ppm	ASTM D5185(m)	<b>3</b>	9	6
Sulfur	ppm	ASTM D5185(m)	<b>5087</b>	6552	3802
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	---

## CONTAMINANTS




method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >50	<b>43</b>	45	▲ 64
Sodium	ppm	ASTM D5185(m)	<b>1</b>	2	0
Potassium	ppm	ASTM D5185(m) >20	<b>2</b>	2	2

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>0.90</b>	0.48	0.200




# OIL ANALYSIS REPORT

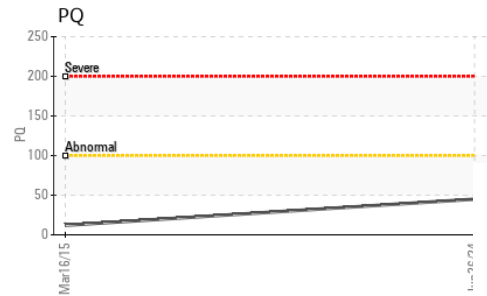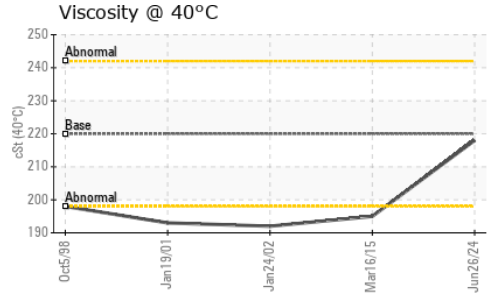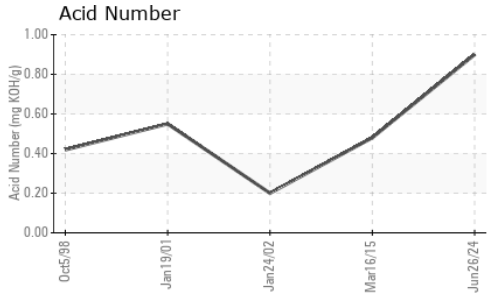






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>LIGHT</b>	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	<b>218</b>	195 ▲ 192

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

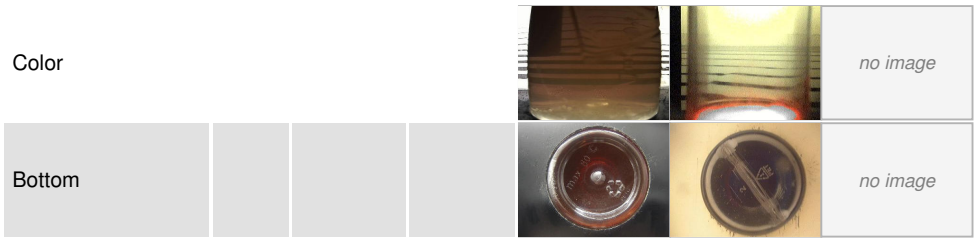

## GRAPHS

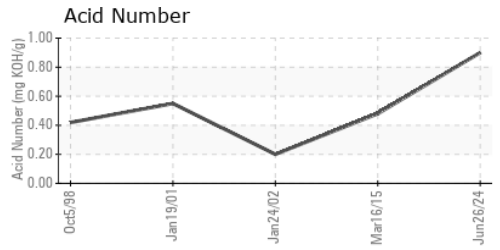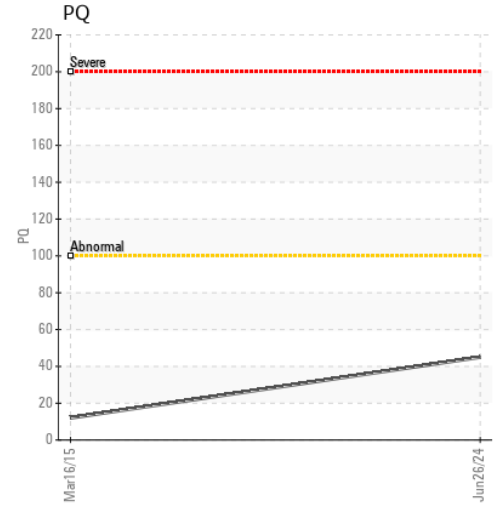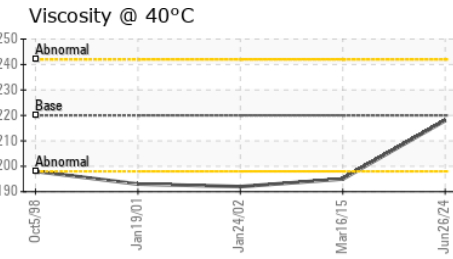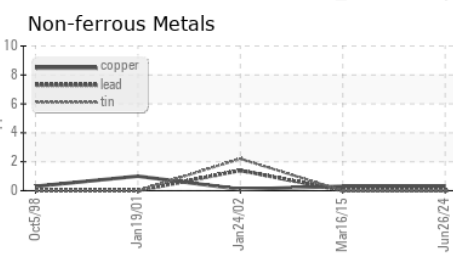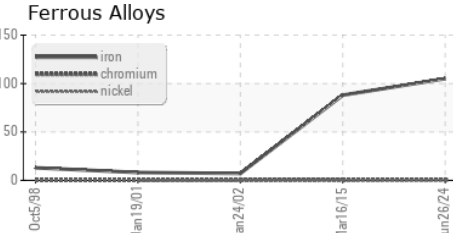

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0945384  
**Lab Number** : 02644992  
**Unique Number** : 5802531  
**Test Package** : IND 2  
**Received** : 02 Jul 2024  
**Tested** : 04 Jul 2024  
**Diagnosed** : 04 Jul 2024 - Wes Davis

**Roseburg Pembroke MDF Inc.**  
 777 Fibreboard Drive  
 Pembroke, ON  
 CA K8A 6W5  
 Contact: Dan Havis  
 danielh@rfpco.com  
 T: (613)732-3939  
 F: (613)732-2869

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.