




OIL ANALYSIS REPORT

Sample Rating Trend

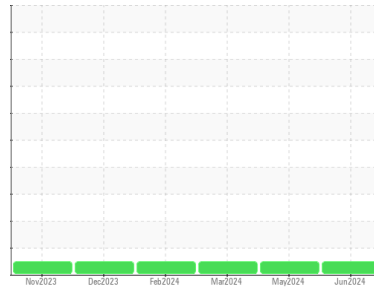

NORMAL



Machine Id

2362

Component

Natural Gas Engine

Fluid

VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | WC0937196 | WC0937353 | WC0878007 |
| Sample Date | Client Info | | | 26 Jun 2024 | 01 May 2024 | 19 Mar 2024 |
| Machine Age | kms | Client Info | | 58758 | 44991 | 35207 |
| Oil Age | kms | Client Info | | 0 | 0 | 0 |
| Oil Changed | Client Info | | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.1 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185(m) | >50 | 9 | 6 | 8 |
| Chromium | ppm | ASTM D5185(m) | >4 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >9 | 2 | 1 | 2 |
| Lead | ppm | ASTM D5185(m) | >30 | 3 | 0 | 0 |
| Copper | ppm | ASTM D5185(m) | >35 | 3 | 2 | 2 |
| Tin | ppm | ASTM D5185(m) | >4 | <1 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) | | 5 | 8 | 9 |
| Barium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | | 55 | 53 | 51 |
| Manganese | ppm | ASTM D5185(m) | | <1 | <1 | 0 |
| Magnesium | ppm | ASTM D5185(m) | | 856 | 787 | 720 |
| Calcium | ppm | ASTM D5185(m) | | 1284 | 1236 | 1128 |
| Phosphorus | ppm | ASTM D5185(m) | | 680 | 577 | 572 |
| Zinc | ppm | ASTM D5185(m) | | 866 | 831 | 796 |
| Sulfur | ppm | ASTM D5185(m) | | 1901 | 1847 | 1809 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |



| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|---------------|------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) | >+100 | 7 | 5 | 5 |
| Sodium | ppm | ASTM D5185(m) | | 2 | 2 | 4 |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | <1 | <1 |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | ASTM D7844* | | 0 | 0 | 0 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 13.1 | 12.0 | 12.0 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 24.9 | 23.1 | 22.7 |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 22.3 | 20.2 | 19.7 |











OIL ANALYSIS REPORT

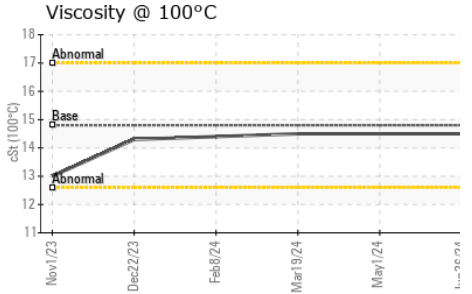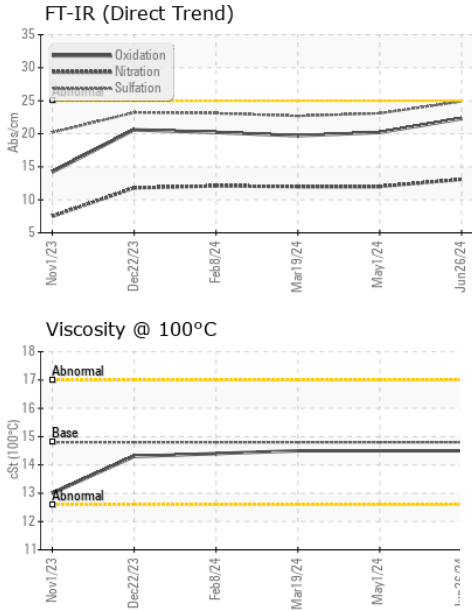

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 14.8 | 14.5 | 14.5 |

GRAPHS

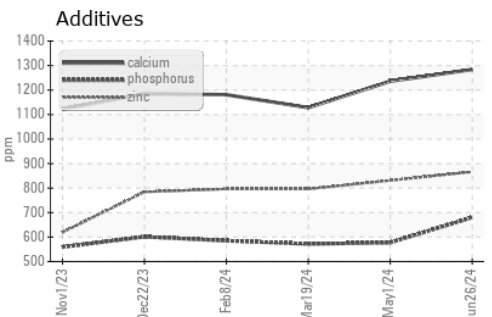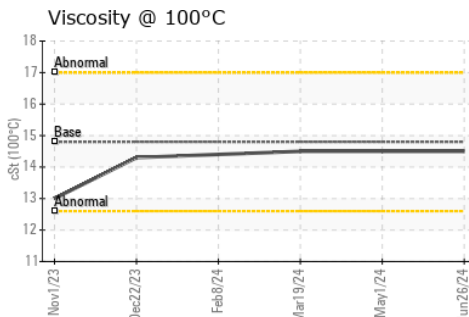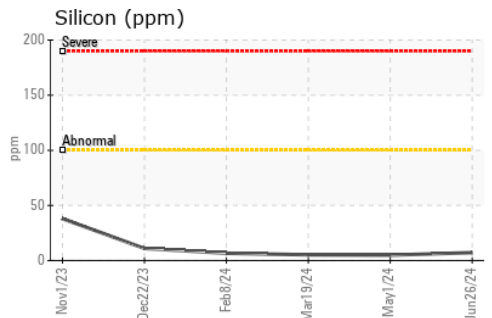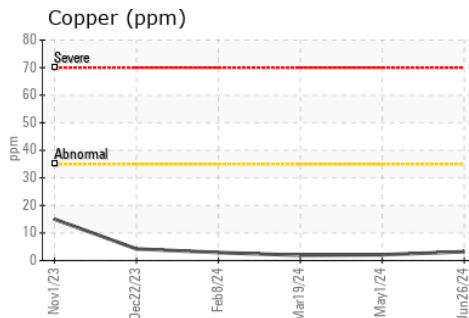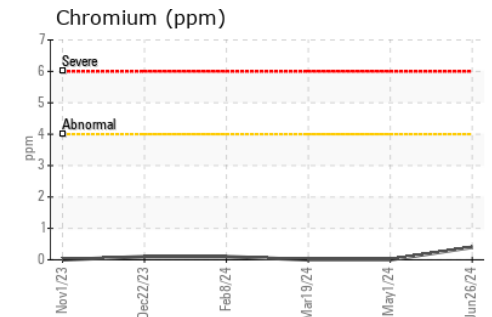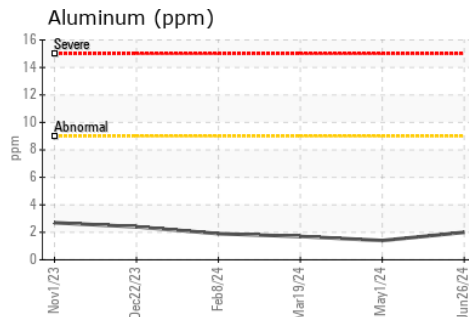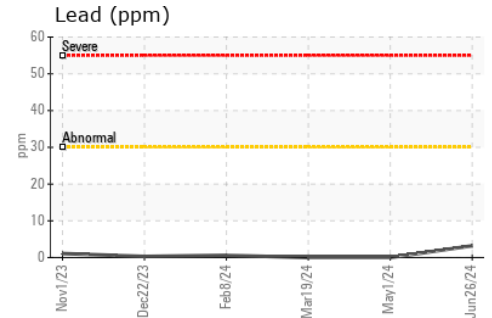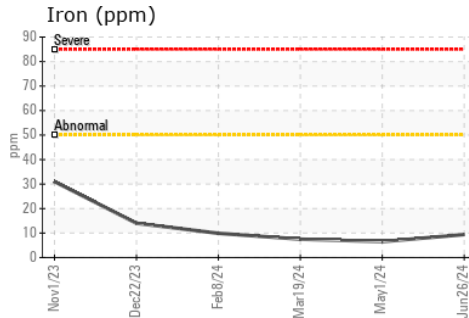

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0937196
Lab Number : 02645236
Unique Number : 5802775
Test Package : MOB 1
Received : 03 Jul 2024
Tested : 03 Jul 2024
Diagnosed : 03 Jul 2024 - Wes Davis

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Ron Skinner
 ron.skinner@hamilton.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

F: (905)679-4502