




OIL ANALYSIS REPORT

Sample Rating Trend

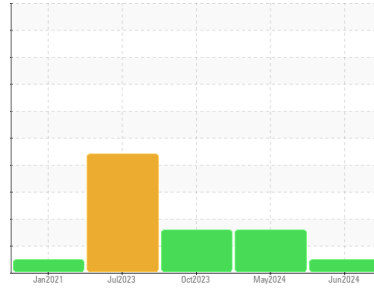

NORMAL



Machine Id
KOUATERA UT99 FMC022 (S/N IFIUT997603)
 Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 15W40 (8 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0937667	WC0941676	WC0848145
Sample Date	Client Info			22 Jun 2024	22 May 2024	30 Oct 2023
Machine Age	hrs	Client Info		9201	8904	7222
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	43	48	56
Chromium	ppm	ASTM D5185(m)	>20	1	2	2
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<1	<1	0
Silver	ppm	ASTM D5185(m)	>2	<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	11	16	13
Lead	ppm	ASTM D5185(m)	>40	14	12	9
Copper	ppm	ASTM D5185(m)	>330	7	9	18
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	29	31	24
Barium	ppm	ASTM D5185(m)	10	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	100	42	42	50
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	540	548	663
Calcium	ppm	ASTM D5185(m)	3000	1821	1788	1764
Phosphorus	ppm	ASTM D5185(m)	1150	755	767	835
Zinc	ppm	ASTM D5185(m)	1350	936	930	1035
Sulfur	ppm	ASTM D5185(m)	4250	2053	2036	2090
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	24	▲ 34	▲ 28
Sodium	ppm	ASTM D5185(m)	>158	5	6	6
Potassium	ppm	ASTM D5185(m)	>20	3	4	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	1	1	1.5
Nitration	Abs/cm	ASTM D7624*	>20	9.6	9.3	10.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.8	26.1	27.5



OIL ANALYSIS REPORT







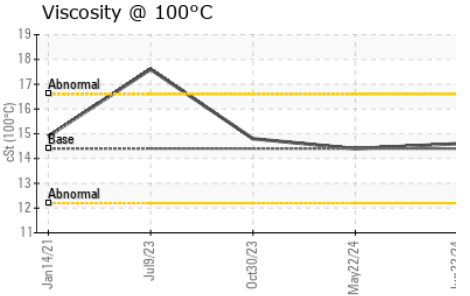
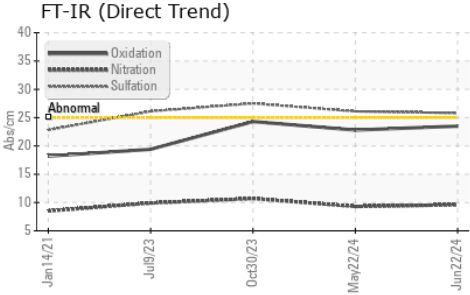


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	23.5	22.8	24.3

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.6	14.4	14.8

GRAPHS

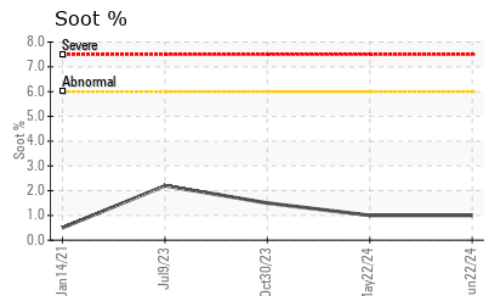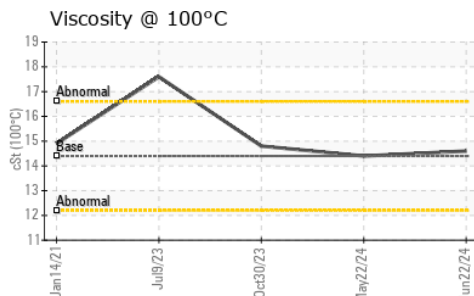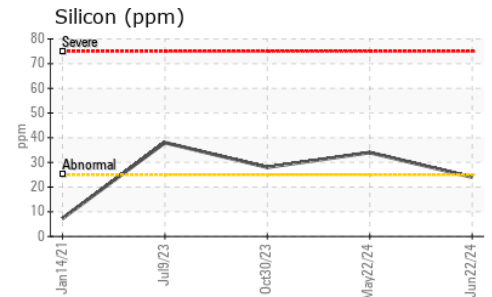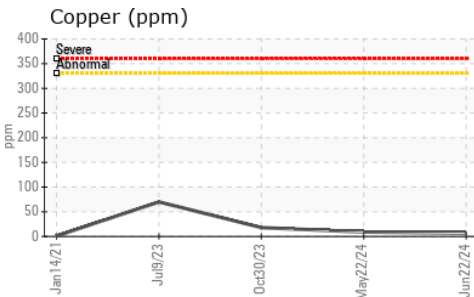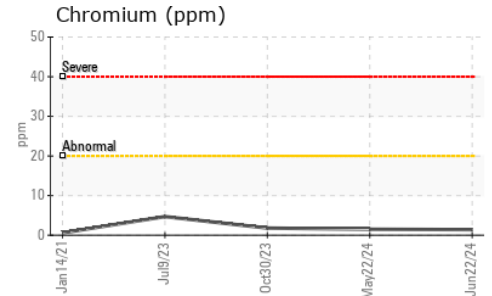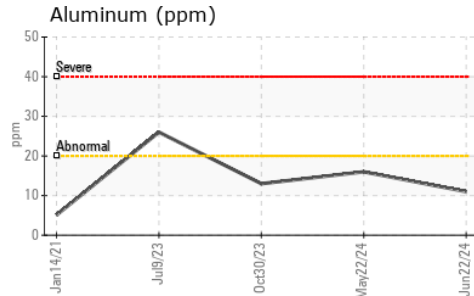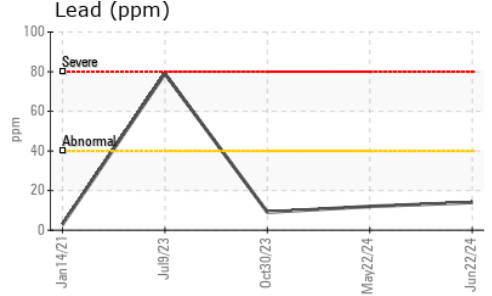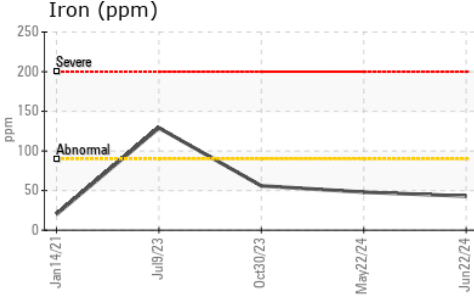

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0937667
Lab Number : **02645416**
Unique Number : 5802955
Test Package : MOB 1
Received : 04 Jul 2024
Tested : 04 Jul 2024
Diagnosed : 04 Jul 2024 - Wes Davis

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Mitch Lamontagne
 AEM_KL_macassaoilsampleresults@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.