

OIL ANALYSIS REPORT

SAB1 **SAB1 G7 Governor Sump**

Hydraulic System

ESSO TERESSO ISO 46 (1600 LTR)

Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Component wear rates appear to be normal (unconfirmed).

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0933978	WC0642851	WC0864644
Sample Date		Client Info		03 Jul 2024	15 May 2024	21 Dec 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	1110	Client Info		N/A	N/A	N/A
Sample Status		Onorte iriio		NORMAL	NORMAL	ATTENTION
			11 1.0			
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	1	1	2
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	0	<1
Lead	ppm	ASTM D5185(m)	>20	0	0	<1
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1	0	0
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	0	0	0	0
Calcium	ppm	ASTM D5185(m)		1	<1	<1
Phosphorus	ppm	ASTM D5185(m)	2.4	4	3	2
Zinc	ppm	ASTM D5185(m)		2	1	1
2110	ppiii	710 TW D0 T00(III)	O			
Sulfur	nnm	ASTM D5185(m)		1138	1120	1255
Sulfur Lithium	ppm ppm	ASTM D5185(m) ASTM D5185(m)		1138 <1	1120 <1	1255 <1
Lithium	ppm	(/	limit/base		<1	<1
	ppm	ASTM D5185(m) method		<1 current		
Lithium	ppm ppm	ASTM D5185(m)	limit/base >15	<1 current	<1 history1	<1 history2 <1
Lithium CONTAMINANTS Silicon	ppm	ASTM D5185(m) method ASTM D5185(m)	>15	<1 current	<1 history1	<1 history2
Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	>15	<1 current 0 0	<1 history1 0 0	<1 history2 <1 0
Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>15 >20	<1 current 0 0 c <1	<1 history1 0 0 <1	<1 history2 <1 0 <1
CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method	>15 >20 limit/base	current 0 0 current	<1 history1 0 0 <1 history1	<1 history2 <1 0 <1 history2
Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647	>15 >20 limit/base >2500	<1 current 0 0 0 1 current 367 117	<1 history1 0 0 <1 history1 276	<1 history2 <1 0 <1 history2 4578
Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >2500 >640 >80	<1 current 0 0 <1 current 367 117 12	<1 history1 0 0 <1 history1 276 95 13	<1 history2 <1 0 <1 history2 4578 412 17
Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D7647 ASTM D7647	>15 >20 limit/base >2500 >640 >80	<1 current 0 0 0 1 current 367 117	<1 history1 0 0 <1 history1 276 95	<1 history2 <1 0 <1 history2 4578 412

16/14/11


ISO 4406 (c) >18/16/13


15/14/11


Oil Cleanliness




OIL ANALYSIS REPORT

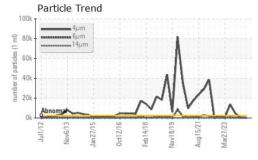






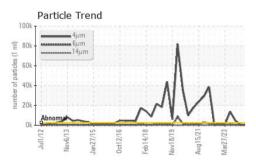

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.02	0.15	0.11	0.14
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	46.0	46.3	46.3
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color				WCoess [6]		

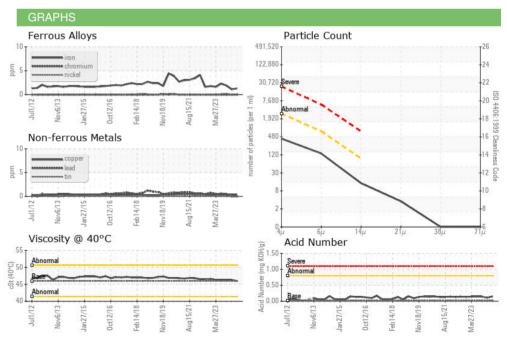





Laboratory Sample No. Lab Number : 02645448 Unique Number : 5802987

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0933978

Test Package : IND 2 (Additional Tests: TAN Man)

Received **Tested** Diagnosed

: 04 Jul 2024 : 05 Jul 2024

: 05 Jul 2024 - Kevin Marson

NIAGARA ON THE LAKE, ON

CA LOS 1J0 Contact: Michael Brochu mike.brochu@opg.com

Ontario Power Generation

NIAGARA PLANT GROUP,, 14000 NIAGARA PKWY

T: (905)357-0322 F: (905)374-5466

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Bottom

Submitted By: ?