

OIL ANALYSIS REPORT

Area SAB1 SAB1 G9 Governor Sump

Hydraulic System Fluid ESSO TERESSO ISO 46 (1600 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

					SIS REPORT
v2010 Jan2012 Aug2013 Jan2015 Oct2016 Aug2020 Aug2021 Mar2023					
	Jandoli Z. Aug2013 Jan2015 Oct2016 Aug2020 Aug2021 Mar2023	2016 Aug2020 Aug202	Aug2013 Jan2015 (v2010 Jan2012	
SAMPLE INFORMATION method limit/base current history1 hist	limit/base current history1 history2	current	limit/base	method	SAMPLE INFORMATION
Sample Number Client Info WC0933984 WC0642857 WC0864	o WC0933984 WC0642857 WC0864638	VC0933984		Client Info	Sample Number
	o 03 Jul 2024 15 May 2024 21 Dec 2023	3 Jul 2024		Client Info	Sample Date

Sample Rating Trend

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0933984	WC0642857	WC0864638
Sample Date		Client Info		03 Jul 2024	15 May 2024	21 Dec 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water	N	WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	<1	<1
Chromium	ppm	ASTM D5185(m)		0	0	0
Nickel	ppm	ASTM D5185(m)	>20	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	. 20	0 <1	0	0 <1
Aluminum	ppm	ASTM D5185(m)			0	
Lead	ppm	ASTM D5185(m) ASTM D5185(m)	>20 >20	0 <1	<1	<1 <1
Copper Tin	ppm			<1	0	< 1
	ppm	ASTM D5185(m) ASTM D5185(m)	>20	0	0	0
Antimony Vanadium	ppm	ASTM D5185(m) ASTM D5185(m)		0	0	0
	ppm			0	0	0
Beryllium Cadmium	ppm	ASTM D5185(m) ASTM D5185(m)		0	0	0
	ppm			U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	0	0	0
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	0	0	0	0
Calcium	ppm	ASTM D5185(m)	0	<1	0	0
Phosphorus	ppm	ASTM D5185(m)	2.4	3	3	2
Zinc	ppm	ASTM D5185(m)	0	1	<1	<1
Sulfur	ppm	ASTM D5185(m)		642	630	685
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	0	0
Sodium	ppm	ASTM D5185(m)		0	0	0
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	171	143	1597
Particles >6µm		ASTM D7647	>640	55	48	288
Particles >14µm		ASTM D7647	>80	6	5	25
Particles >21µm		ASTM D7647	>20	1	2	5
Particles >38µm		ASTM D7647	>4	0	1	1

Report Id: ONTQUE [WCAMIS] 02645455 (Generated: 07/05/2024 10:11:27) Rev: 1

Particles >71µm

Oil Cleanliness

ASTM D7647 >3

ISO 4406 (c) >18/16/13

0

15/13/10

0


14/13/10


0




OIL ANALYSIS REPORT

		4µm				
80k -	**********	6μm 14μm			A	
60k -					1	111111
40k -					A	A
20k -				/	ΔJ	1 1
Ok	Ale Anoal	$^{\land}$	1 -	V/	~ V1	N/A

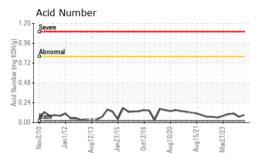



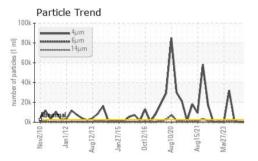


FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.02	0.09	0.07	0.11
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	44.2	44.3	44.3
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
						6

Color



Bottom

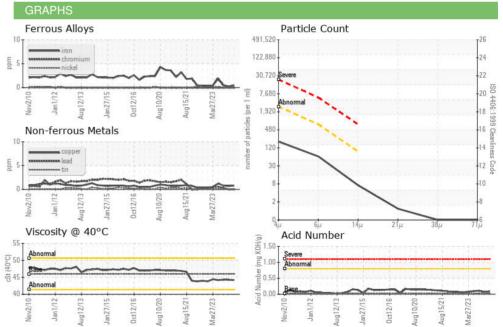

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 CALA Sample No. : WC0933984 NIAGARA PLANT GROUP,, 14000 NIAGARA PKWY Received : 04 Jul 2024 Lab Number : 02645455 Tested : 05 Jul 2024 NIAGARA ON THE LAKE, ON ISO 17025:2017 Accredited Laboratory Unique Number : 5802994 Diagnosed : 05 Jul 2024 - Kevin Marson Test Package : IND 2 (Additional Tests: TAN Man) To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Report Id: ONTQUE [WCAMIS] 02645455 (Generated: 07/05/2024 10:11:27) Rev: 1

S,

CA LOS 1J0 Contact: Michael Brochu mike.brochu@opg.com T: (905)357-0322

Ontario Power Generation

F: (905)374-5466 Submitted By: ?