


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id

G1

Turbine Bearing

ESSO TERESSO ISO 46 (--- GAL)

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jul2024		
SAMPLE INFORM	AATION	method	limit/base	ourront	history1	hictory?
	WATION		IIIIIIVDase	current	history1	history2
Sample Number		Client Info		WC0812611		
Sample Date		Client Info		03 Jul 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>7	<1		
Chromium	ppm	ASTM D5185(m)	>2	0		
Nickel	ppm	ASTM D5185(m)	>2	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>2	0		
Lead	ppm	ASTM D5185(m)	>33	0		
Copper	ppm	ASTM D5185(m)	>3	1		
Tin	ppm	ASTM D5185(m)	>6	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	nnm	ASTM D5185(m)	0	0		
Barium	ppm	. ,	U	0		
	ppm	ASTM D5185(m)	0	0		
Molybdenum	ppm	ASTM D5185(m)	U			
Manganese Magnesium	ppm	ASTM D5185(m) ASTM D5185(m)	0	0		
Magnesium Calcium	ppm	ASTM D5185(m)		∪ <1		
	ppm	ASTM D5185(m) ASTM D5185(m)	2.4	2		
Phosphorus Zinc	ppm	. ,		2		
	ppm	ASTM D5185(m)	0			
Sulfur	ppm	ASTM D5185(m)		592		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	0		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	<1		



OIL ANALYSIS REPORT

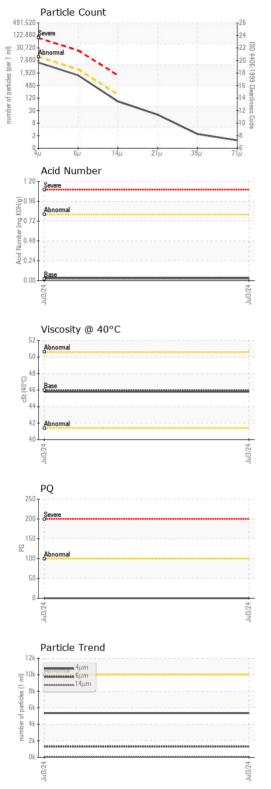

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	5352		
Particles >6µm		ASTM D7647	>2500	1301		
Particles >14µm		ASTM D7647	>160	73		
Particles >21µm		ASTM D7647	>40	17		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>20/18/14	20/18/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.02	0.03		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>2	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	45.8		
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image





Laboratory

Sample No. Lab Number : 02645499 Unique Number : 5803038 Test Package : IND 2 (Additional Tests: PQ, PrtCount)

: WC0812611

To discuss this sample report, contact Customer Service at 1-800-268-2131.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received

: 04 Jul 2024 **Tested** : 08 Jul 2024 Diagnosed : 08 Jul 2024 - Kevin Marson

Ontario Power Generation NIAGARA PLANT GROUP,, 14000 NIAGARA PKWY NIAGARA ON THE LAKE, ON CA LOS 1J0

Contact: Michael Brochu mike.brochu@opg.com T: (905)357-0322

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Contact/Location: Michael Brochu - ONTQUE

F: (905)374-5466