



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**SEW STK1T**  
 Component  
**Gearbox**  
 Fluid  
 {not provided} (31 LTR)

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0871098</b>	---	---
Sample Date	Client Info			<b>21 May 2024</b>	---	---
Machine Age	yrs	Client Info		<b>4</b>	---	---
Oil Age	yrs	Client Info		<b>4</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>82</b>	---	---
Iron	ppm	ASTM D5185(m)	>200	<b>128</b>	---	---
Chromium	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>100	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>25	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>991</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>530</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>3</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>220</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>1</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>1</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.50</b>	---	---



# OIL ANALYSIS REPORT

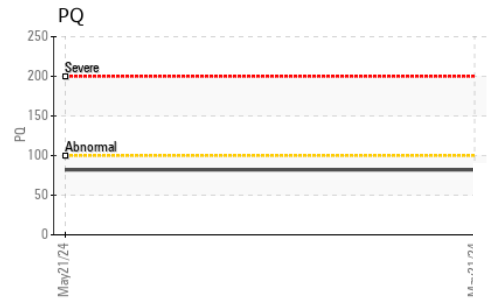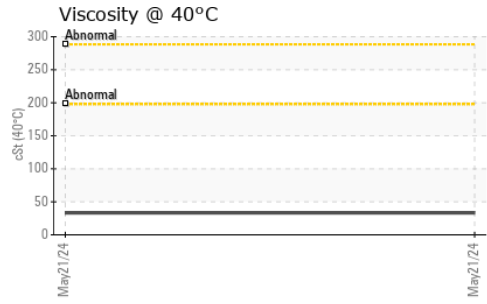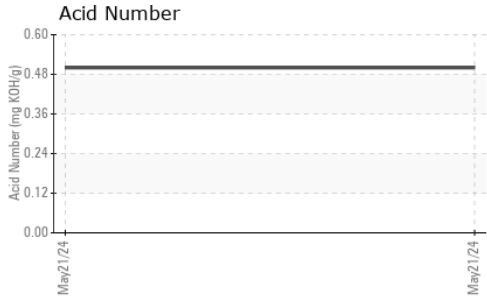






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>LIGHT</b>	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---
Free Water	scalar	Visual*		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>33.2</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

## GRAPHS

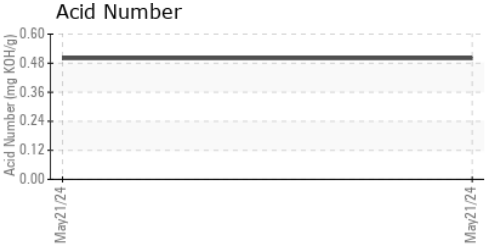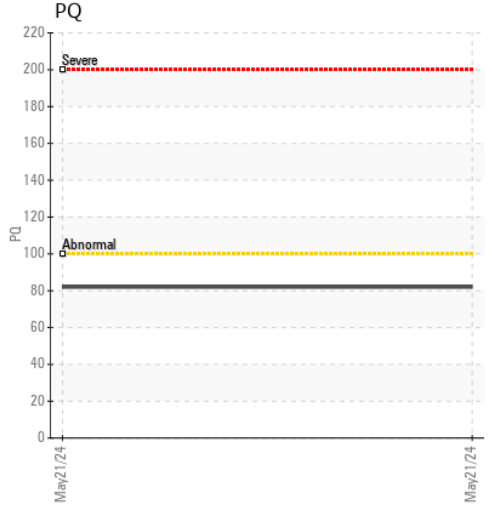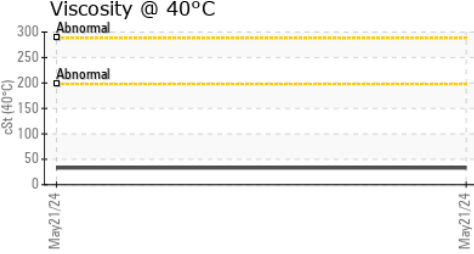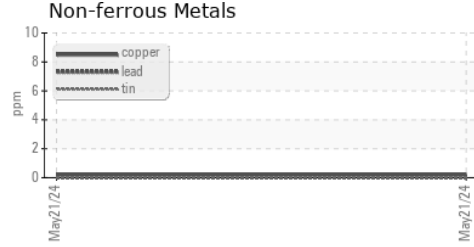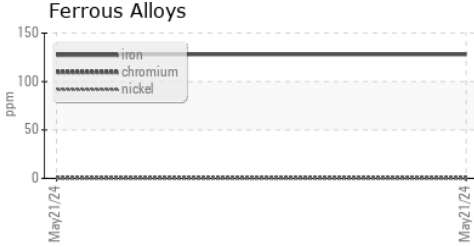

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0871098      **Received** : 04 Jul 2024  
**Lab Number** : **02645604**      **Tested** : 05 Jul 2024  
**Unique Number** : 5803143      **Diagnosed** : 05 Jul 2024 - Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**CONESTOGA COLD STORAGE**  
 2660 MEADOWPINE BLVD., DOOR 57, CALL EXT. 2317  
 MISSISSAUGA, ON  
 CA L5N 7E6  
 Contact: Jeremy Koziol  
 jkoziol@coldstorage.com  
 T: (519)748-4086  
 F: (905)567-1844

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.