




# OIL ANALYSIS REPORT

## Sample Rating Trend

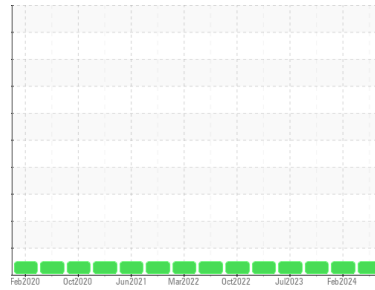

**NORMAL**



Machine Id  
**150-M-006 First Press First Drive**  
 Component  
**Gearbox**  
 Fluid  
**MOBIL SHC 630 (33 LTR)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0962301</b>	WC0913371	WC0879793
Sample Date	Client Info	<b>03 Jul 2024</b>	26 Feb 2024	08 Nov 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	0	0
Iron	ppm ASTM D5185(m) >200	<b>&lt;1</b>	<1	<1
Chromium	ppm ASTM D5185(m) >15	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185(m) >25	<b>&lt;1</b>	<1	<1
Lead	ppm ASTM D5185(m) >100	<b>0</b>	0	0
Copper	ppm ASTM D5185(m) >200	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185(m) >25	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m) >5	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>&lt;1</b>	0	<1
Barium	ppm ASTM D5185(m)	<b>0</b>	0	<1
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m)	<b>0</b>	0	0
Calcium	ppm ASTM D5185(m)	<b>2</b>	2	2
Phosphorus	ppm ASTM D5185(m)	<b>244</b>	257	248
Zinc	ppm ASTM D5185(m)	<b>19</b>	19	20
Sulfur	ppm ASTM D5185(m)	<b>205</b>	225	222
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

### CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >50	<b>3</b>	4	4
Sodium	ppm ASTM D5185(m)	<b>0</b>	0	<1
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	<1	0

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	<b>0.36</b>	0.35	0.29




# OIL ANALYSIS REPORT

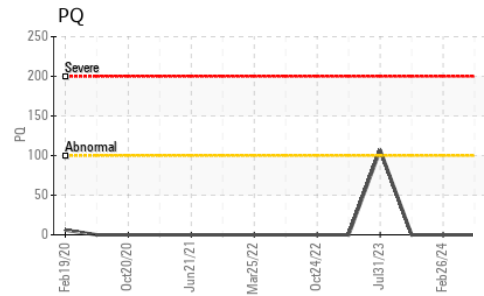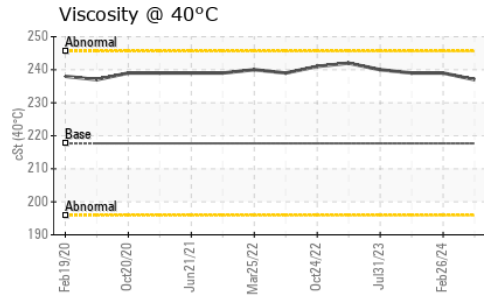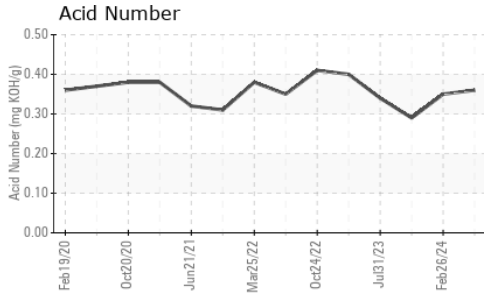






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	217.7	237	239

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

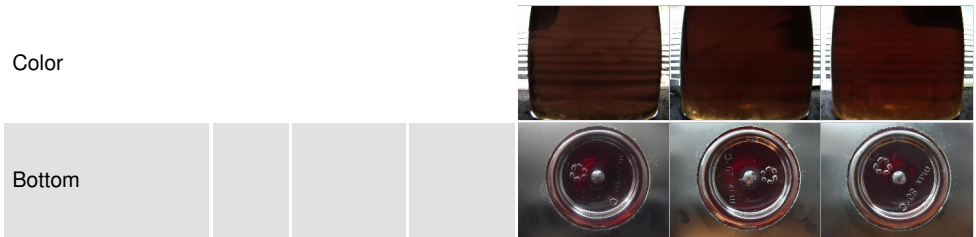

## GRAPHS

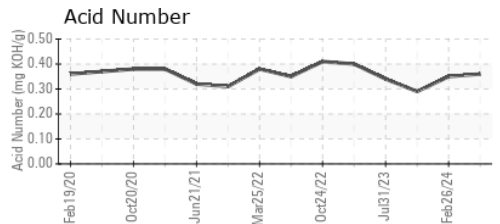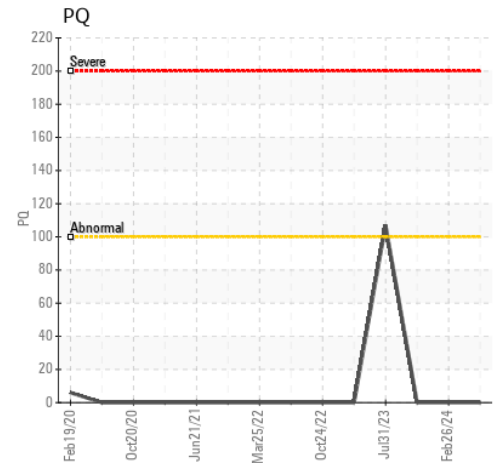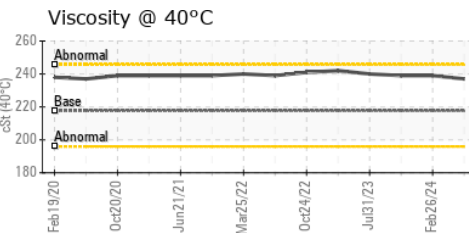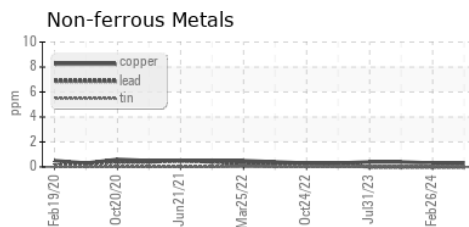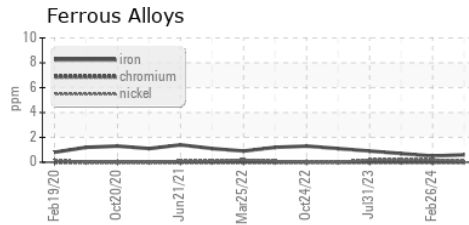

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0962301 **Received** : 04 Jul 2024  
**Lab Number** : 02645617 **Tested** : 05 Jul 2024  
**Unique Number** : 5803156 **Diagnosed** : 05 Jul 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**New Forest Paper Mill**  
 333 Progress Avenue  
 Scarborough, ON  
 CA M1P 2Z7  
 Contact: Nayana Patel  
 nayana\_patel@atlantic.ca  
 T: (519)991-8496  
 F: (416)298-5386