


# PROBLEM SUMMARY

Sample Rating Trend


ISO



Area  
**Extrudex Alum - E00400**  
 Machine Id  
**A2407031**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

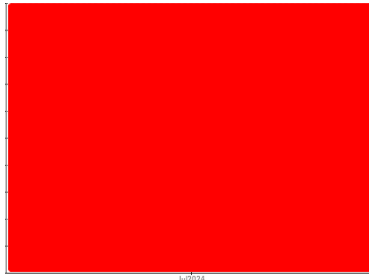

## COMPONENT CONDITION SUMMARY

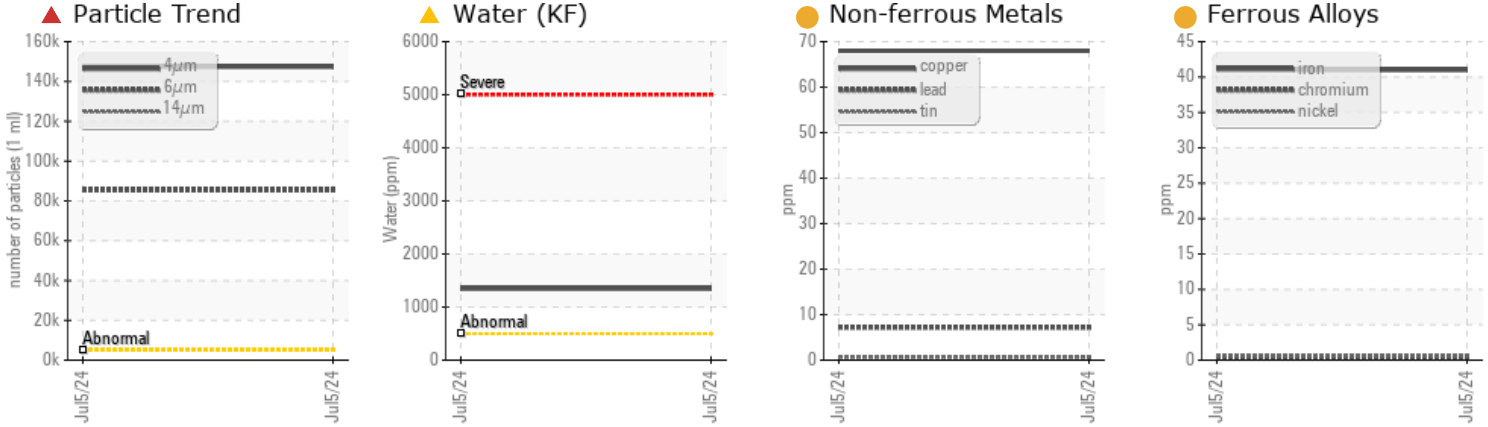

## RECOMMENDATION

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Water	%	ASTM D6304*	>0.05	▲ <b>0.134</b>	---	---
ppm Water	ppm	ASTM D6304*	>500	▲ <b>1348</b>	---	---
Particles >4µm		ASTM D7647	>5000	▲ <b>147390</b>	---	---
Particles >6µm		ASTM D7647	>640	▲ <b>85409</b>	---	---
Particles >14µm		ASTM D7647	>160	▲ <b>5589</b>	---	---
Particles >21µm		ASTM D7647	>40	▲ <b>561</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/16/14	▲ <b>24/24/20</b>	---	---

Customer Id: CHECOB  
 Sample No.: E30002582  
 Lab Number: 02646210  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Tatiana Sorkina +1 (800)263-3939  
[tsorkina@e360s.ca](mailto:tsorkina@e360s.ca)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*


## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

ISO

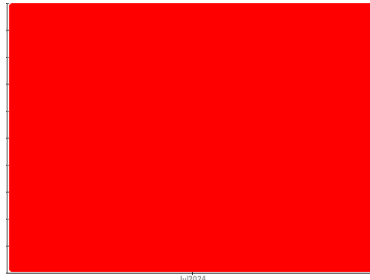

Area  
**Extrudex Alum - E00400**  
 Machine Id  
**A2407031**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## DIAGNOSIS

- **Wear**  
Copper and iron ppm levels are noted.
- ▲ **Contamination**  
Particles >14µm are severely high. Particles >21µm are severely high. Particles >6µm are severely high. Oil Cleanliness are severely high. Particles >4µm are severely high. Water and ppm water contamination levels are abnormal.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Batch #	Client Info		<b>2024 07 0010</b>	---	---
Department	Client Info		<b>Production</b>	---	---
Sample From	Client Info		<b>Machine</b>	---	---
Production Stage	Client Info		<b>Initial</b>	---	---
Sent to WC	Client Info		<b>07/05/2024</b>	---	---
Sample Number	Client Info		<b>E30002582</b>	---	---
Sample Date	Client Info		<b>05 Jul 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed		Client Info	<b>N/A</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	● <b>41</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >20	<b>8</b>	---	---
Lead	ppm	ASTM D5185(m) >20	<b>7</b>	---	---
Copper	ppm	ASTM D5185(m) >20	● <b>68</b>	---	---
Tin	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---






## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m) 25	<b>23</b>	---	---
Calcium	ppm	ASTM D5185(m) 200	<b>64</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 300	<b>554</b>	---	---
Zinc	ppm	ASTM D5185(m) 370	<b>465</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2500	<b>1710</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>3</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>1</b>	---	---
Water	%	ASTM D6304* >0.05	▲ <b>0.134</b>	---	---
ppm Water	ppm	ASTM D6304* >500	▲ <b>1348</b>	---	---

# OIL ANALYSIS REPORT

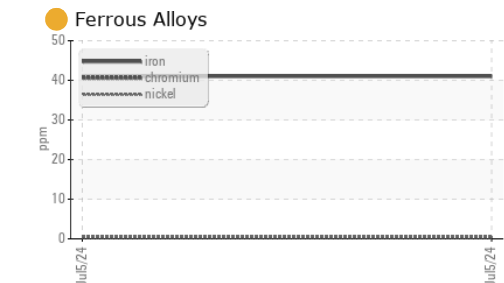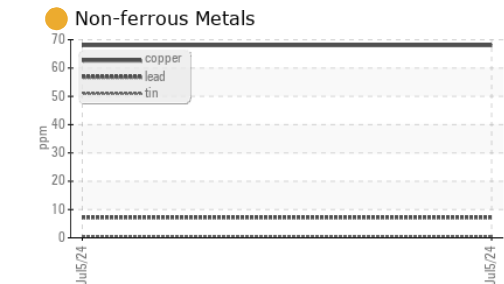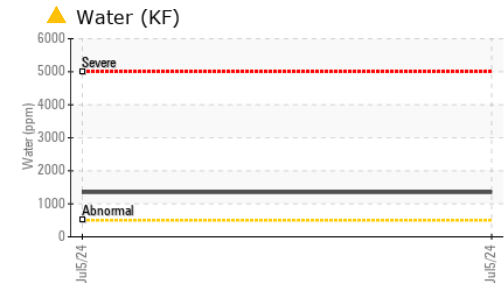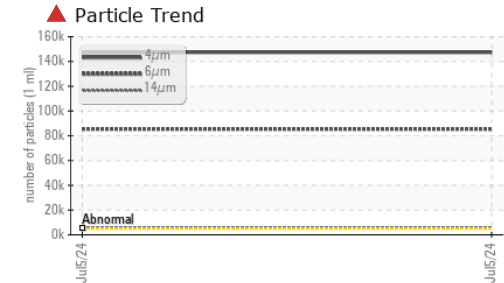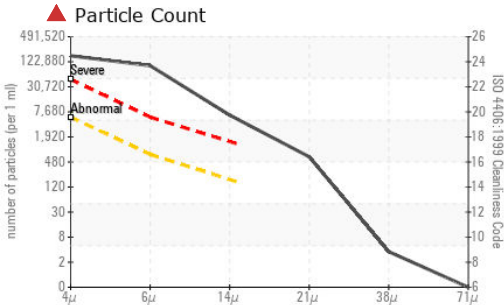

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 147390	---	---
Particles >6µm	ASTM D7647	>640	▲ 85409	---	---
Particles >14µm	ASTM D7647	>160	▲ 5589	---	---
Particles >21µm	ASTM D7647	>40	▲ 561	---	---
Particles >38µm	ASTM D7647	>10	3	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	▲ 24/24/20	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.68	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	LIGHT	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	68	65.7	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.6	8.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	96	106	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : E30002582  
**Lab Number** : 02646210  
**Unique Number** : 5811762  
**Test Package** : IND 2 ( Additional Tests: Bottom, KF, KV100, TAN Man, VI )

**Environmental 360 Solutions Ltd.**  
 640 Victoria Street  
 Cobourg, ON  
 CA K9A 5H5  
 Contact: Tatiana Sorkina  
 tsorkina@e360s.ca  
 T: (800)263-3939  
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.