

OIL ANALYSIS REPORT

Area
Chem-Ecol A2407018

Unknown Component

CHEM-ECOL WAYLUBE 220 (--- GAL)

Sample Rating Trend NORMAL

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

			Jui2024				
CAMPLE INCOM	AATIONI		11 14 //		li ta ka madi	h:-1 0	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Batch #		Client Info		3144-A			
Department		Client Info		Production			
Sample From		Client Info		Machine			
Production Stage		Client Info		Final			
Sent to WC		Client Info		07/05/2024			
Sample Number		Client Info		E30002584			
Sample Date		Client Info		05 Jul 2024			
Machine Age	hrs	Client Info		0			
Oil Age	hrs	Client Info		0			
Oil Changed		Client Info		N/A			
Sample Status				NORMAL			
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)		0			
Chromium	ppm	ASTM D5185(m)		0			
Nickel	ppm	ASTM D5185(m)		<1			
Titanium	ppm	ASTM D5185(m)		0			
Silver	ppm	ASTM D5185(m)		0			
Aluminum	ppm	ASTM D5185(m)		<1			
Lead	ppm	ASTM D5185(m)		0			
Copper	ppm	ASTM D5185(m)		0			
Tin	ppm	ASTM D5185(m)		0			
Antimony	ppm	ASTM D5185(m)		0			
Vanadium	ppm	ASTM D5185(m)		0			
Beryllium	ppm	ASTM D5185(m)		0			
Cadmium	ppm	ASTM D5185(m)		0			
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		0			
Barium	ppm	ASTM D5185(m)		0			
Molybdenum	ppm	ASTM D5185(m)		0			
Manganese	ppm	ASTM D5185(m)		0			
Magnesium	ppm	ASTM D5185(m)		<1			
Calcium	ppm	ASTM D5185(m)		<1			
Phosphorus	ppm	ASTM D5185(m)		175			
Zinc	ppm	ASTM D5185(m)		2			
Sulfur	ppm	ASTM D5185(m)		1977			
Lithium	ppm	ASTM D5185(m)		<1			
CONTAMINANTS	S	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)		1			
Sodium	ppm	ASTM D5185(m)		<1			
Potassium	ppm	ASTM D5185(m)	>20	0			
Water	%	ASTM D6304*		0.00			
		A OTA A DOGG 4*		•			

ppm Water


ASTM D6304*

ppm

0



OIL ANALYSIS REPORT

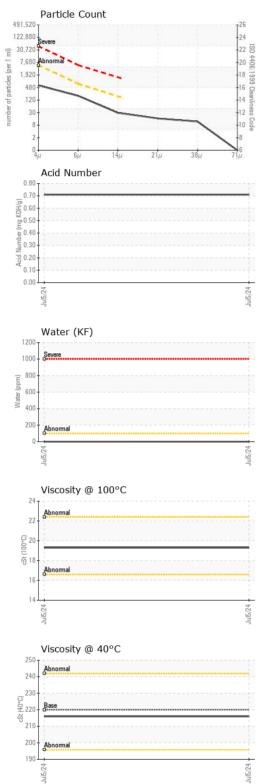

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	538		
Particles >6µm		ASTM D7647	>640	169		
Particles >14µm		ASTM D7647	>160	26		
Particles >21µm		ASTM D7647	>40	14		
Particles >38µm		ASTM D7647	>10	10		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	16/15/12		
FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.71		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERTI	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	216		
Visc @ 100°C	cSt	ASTM D7279(m)		19.3		
Viscosity Index (VI)	Scale	ASTM D2270*		100		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02646212 Unique Number : 5811764

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

: E30002584 Received : 08 Jul 2024 **Tested** : 11 Jul 2024 : 12 Jul 2024 - Aylwin Lee Diagnosed

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5 Contact: Tatiana Sorkina

tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950

Validity of results and interpretation are based on the sample and information as supplied. Report Id: CHECOB [WCAMIS] 02646212 (Generated: 07/12/2024 07:46:25) Rev: 1

Contact/Location: Tatiana Sorkina - CHECOB