


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

PRESS #4 RUNOUT TABLE

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			NovŽ023	Jul2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0943180	WC	
Sample Date		Client Info		05 Jul 2024	01 Nov 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ATTENTION	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	10	
Chromium	ppm	ASTM D5185(m)	>20	0	1	
Nickel	ppm	ASTM D5185(m)	>20	<1	<1	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	0	
Aluminum	ppm	ASTM D5185(m)	>20	<1	<1	
Lead	ppm	ASTM D5185(m)	>20	0	<1	
Copper	ppm	ASTM D5185(m)	>20	<1	5	
Tin	ppm	ASTM D5185(m)	>20	0	0	
Antimony	ppm	ASTM D5185(m)		0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	1	0	
Barium	ppm	ASTM D5185(m)	5	0	0	
Molybdenum	ppm	ASTM D5185(m)	5	0	0	
Manganese	ppm	ASTM D5185(m)		0	0	
Magnesium	ppm	ASTM D5185(m)	25	3	2	
Calcium	ppm	ASTM D5185(m)	200	66	50	
Phosphorus	ppm	ASTM D5185(m)	300	323	334	
Zinc	ppm	ASTM D5185(m)	370	424	379	
Sulfur	ppm	ASTM D5185(m)	2500	732	754	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	<1	
Sodium	ppm	ASTM D5185(m)		0	1	
Potassium	ppm	ASTM D5185(m)	>20	<1	2	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1903	5588	
Particles >6µm		ASTM D7647	>1300	309	443	
Particles >14µm		ASTM D7647	>160	43	10	
Particles >21µm		ASTM D7647	>40	17	4	
Particles >38µm		ASTM D7647	>10	2	2	
Particles >71µm		ASTM D7647	>3	1	2	

ISO 4406 (c) >19/17/14


Oil Cleanliness

20/16/10

Contact/Location: Harsh Murria - INDMIS



OIL ANALYSIS REPORT

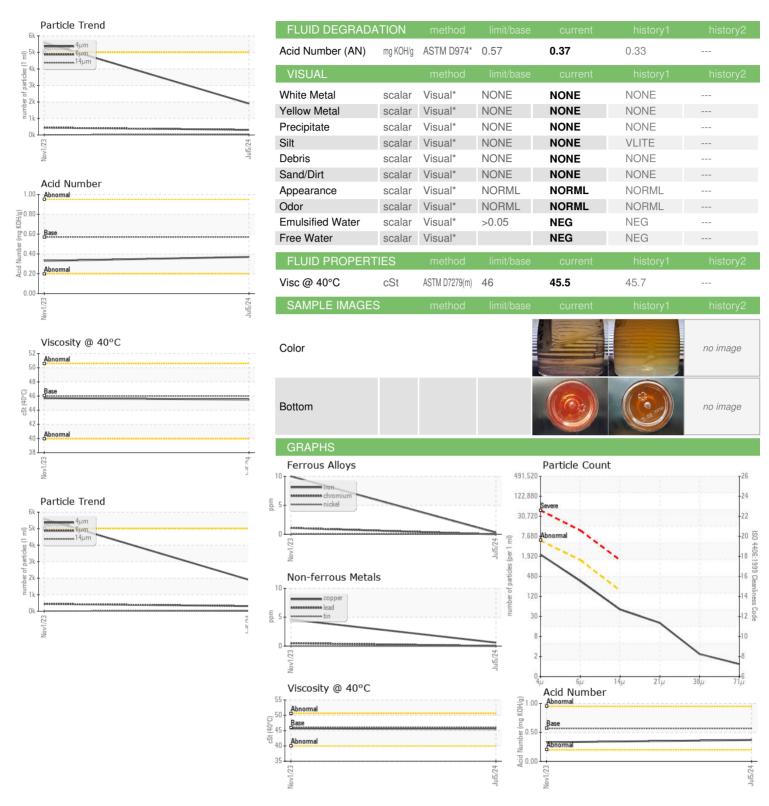





Laboratory Sample No.

Lab Number

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0943180 : 02646257

Test Package : IND 2

Received : 08 Jul 2024 **Tested** : 09 Jul 2024 Unique Number : 5811809 Diagnosed : 09 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **Hydro Extrusion North**

5675 Kennedy Road Mississauga, ON CA L4Z 2H9 Contact: Harsh Murria Harsh.murria@hydro.com T: (819)462-0479

F: (866)462-6478