




# OIL ANALYSIS REPORT

Sample Rating Trend

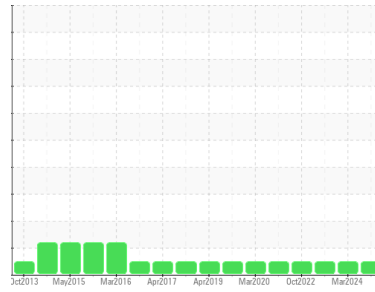

**NORMAL**



Area

**Propulsion/Salle Moteurs de Propulsion**  
Machine Id  
**12B06#01B02#01 Palier Avant Babord (S/N 1028151)**

Component

**Front Bearing**

Fluid

**ESSO TERESSTIC ISO 100 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC</b>	WC0878489	WC0751400
Sample Date	Client Info	<b>03 Jul 2024</b>	20 Mar 2024	01 Apr 2023
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	<1
Chromium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m) >5	<b>0</b>	0	0
Lead	ppm	ASTM D5185(m) >25	<b>6</b>	6	5
Copper	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES


method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m) .2	<b>0</b>	0	0
Barium	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m) 1.2	<b>0</b>	0	0
Calcium	ppm	ASTM D5185(m) .2	<b>&lt;1</b>	0	0
Phosphorus	ppm	ASTM D5185(m) 2.4	<b>7</b>	4	3
Zinc	ppm	ASTM D5185(m) 1.9	<b>&lt;1</b>	<1	<1
Sulfur	ppm	ASTM D5185(m) 2250	<b>371</b>	265	51
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	0	<1
Sodium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	0	0




# OIL ANALYSIS REPORT

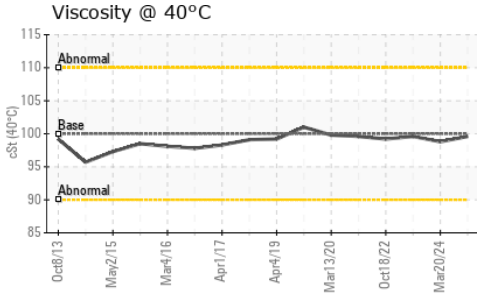




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	100	<b>99.6</b>	98.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

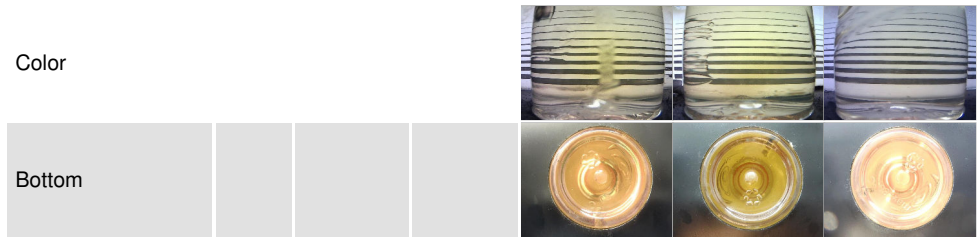

## GRAPHS

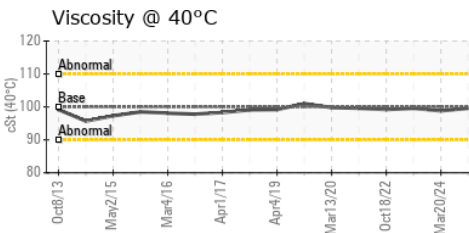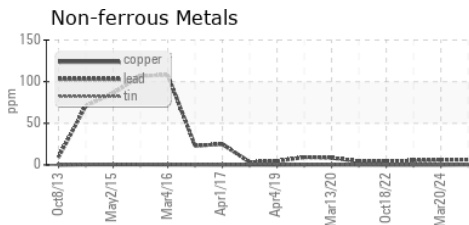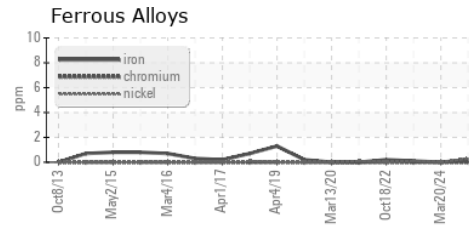

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : **02646275**  
**Unique Number** : 5811827  
**Test Package** : MAR 1

**Canadian Coast Guard**  
 CCGS Amundsen, 101 Boul. Champlain  
 Quebec, QC  
 CA G1K 7Y7  
 Contact: Chief Engineer  
 amundsense@ccgs-ngcc.gc.ca  
 T: (418)953-8233  
 F: x:

Received : 08 Jul 2024  
 Tested : 08 Jul 2024  
 Diagnosed : 09 Jul 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.