



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
5021T
 Component
Diesel Engine
 Fluid
SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a components first oil change.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0948287	---	---
Sample Date	Client Info		30 Jun 2024	---	---
Machine Age	hrs	Client Info	427	---	---
Oil Age	hrs	Client Info	427	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	78	---	---
Chromium	ppm	ASTM D5185(m) >20	2	---	---
Nickel	ppm	ASTM D5185(m) >4	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >3	0	---	---
Aluminum	ppm	ASTM D5185(m) >20	14	---	---
Lead	ppm	ASTM D5185(m) >40	3	---	---
Copper	ppm	ASTM D5185(m) >330	113	---	---
Tin	ppm	ASTM D5185(m) >15	<1	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	31	---	---
Barium	ppm	ASTM D5185(m)	8	---	---
Molybdenum	ppm	ASTM D5185(m)	48	---	---
Manganese	ppm	ASTM D5185(m)	6	---	---
Magnesium	ppm	ASTM D5185(m)	741	---	---
Calcium	ppm	ASTM D5185(m)	1157	---	---
Phosphorus	ppm	ASTM D5185(m)	661	---	---
Zinc	ppm	ASTM D5185(m)	791	---	---
Sulfur	ppm	ASTM D5185(m)	1785	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	21	---	---
Sodium	ppm	ASTM D5185(m) >228	7	---	---
Potassium	ppm	ASTM D5185(m) >20	5	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	0.9	---	---
Nitration	Abs/cm	ASTM D7624* >20	11.2	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	22.8	---	---



OIL ANALYSIS REPORT







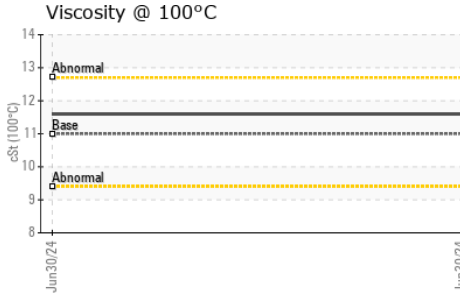
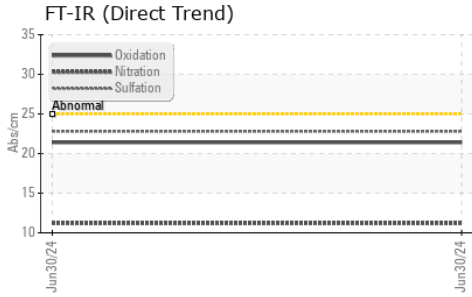


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	21.4	---	---

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	11.0	11.6	---	---

GRAPHS

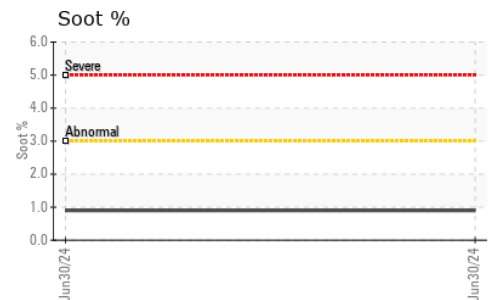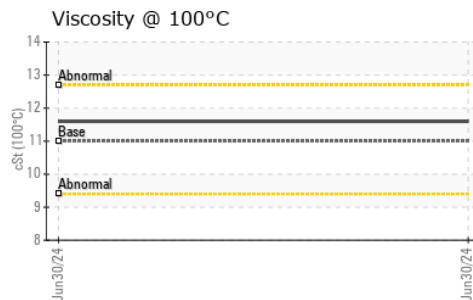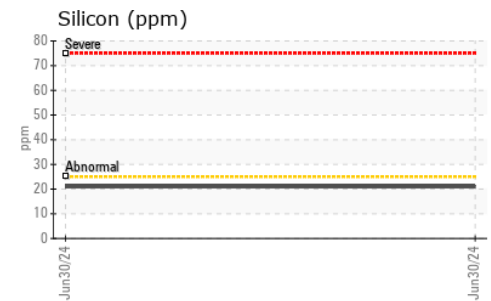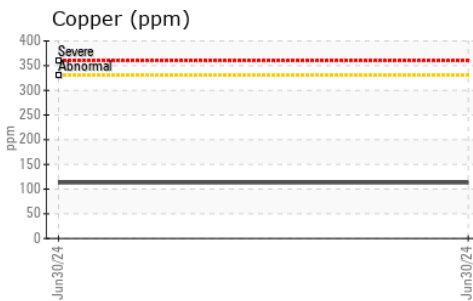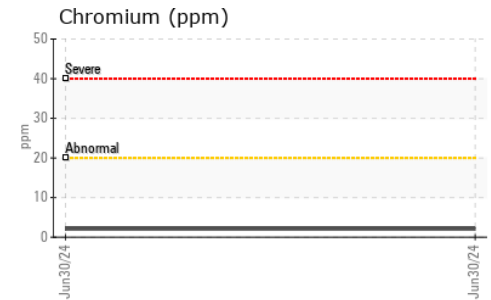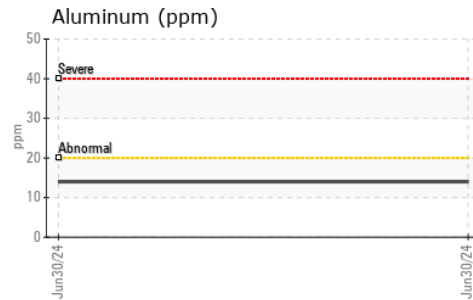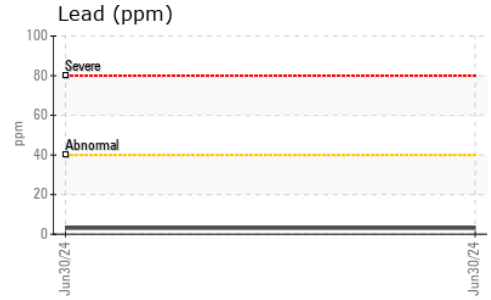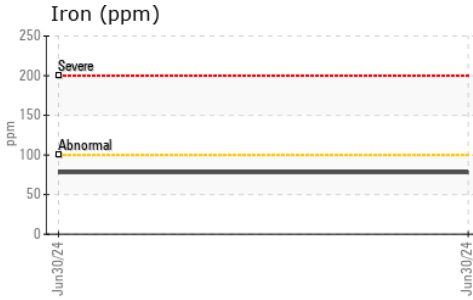

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **MANITOULIN TRANSPORT (GARAGE)**
Sample No. : WC0948287 **Received** : 09 Jul 2024 1335 SHAWSON DRIVE
Lab Number : **02646534** **Tested** : 09 Jul 2024 MISSISSAUGA, ON
Unique Number : 5812086 **Diagnosed** : 09 Jul 2024 - Wes Davis CA L4W 1C4
Test Package : MOB 1 Contact: Travis Spence
 tspence@manitoulintransport.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

F: (905)564-6361