




# OIL ANALYSIS REPORT

## Sample Rating Trend

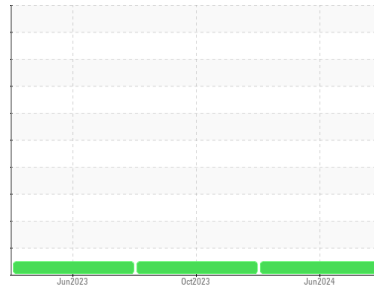

**NORMAL**



Machine Id

**52923**

Component

**Diesel Engine**

Fluid

**DISEL ENGINE OIL SAE 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0948277</b>	WC0864510	WC0797625
Sample Date	Client Info			<b>23 Jun 2024</b>	14 Oct 2023	18 Jun 2023
Machine Age	mls	Client Info		<b>1286111</b>	62491	50553
Oil Age	mls	Client Info		<b>32760</b>	31938	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>27</b>	38	44
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	3	2
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>13</b>	68	14
Lead	ppm	ASTM D5185(m)	>40	<b>3</b>	9	4
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	7	23
Tin	ppm	ASTM D5185(m)	>15	<b>1</b>	2	4
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>2</b>	7	56
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	<1	5
Molybdenum	ppm	ASTM D5185(m)	100	<b>60</b>	63	67
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	2	6
Magnesium	ppm	ASTM D5185(m)	450	<b>990</b>	931	450
Calcium	ppm	ASTM D5185(m)	3000	<b>1060</b>	1193	1737
Phosphorus	ppm	ASTM D5185(m)	1150	<b>1036</b>	990	1050
Zinc	ppm	ASTM D5185(m)	1350	<b>1234</b>	1250	1206
Sulfur	ppm	ASTM D5185(m)	4250	<b>2438</b>	2317	2354
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>5</b>	14	40
Sodium	ppm	ASTM D5185(m)		<b>2</b>	3	4
Potassium	ppm	ASTM D5185(m)	>20	<b>28</b>	166	40

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	0.3	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.8</b>	9.0	8.4
Sulfation	Abs/1mm	ASTM D7415*	>30	<b>21.2</b>	23.0	22.3



# OIL ANALYSIS REPORT







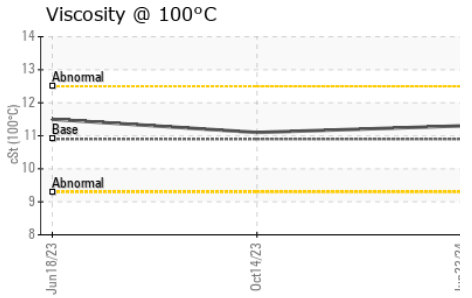
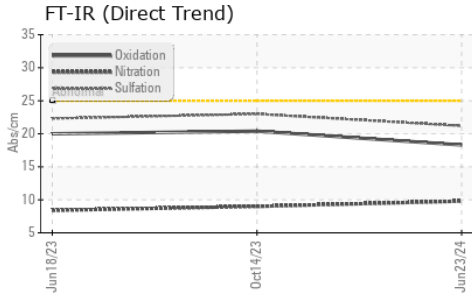


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>18.3</b>	20.4	20.0

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>11.3</b>	11.1	11.5

## GRAPHS

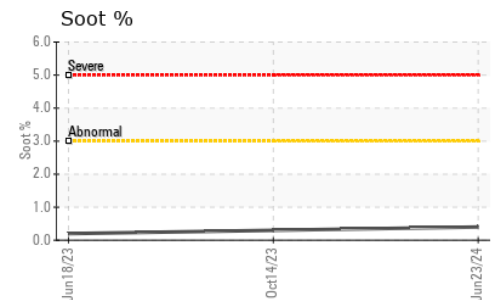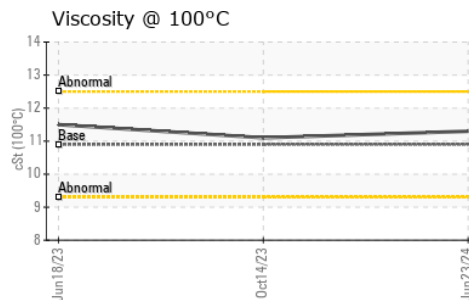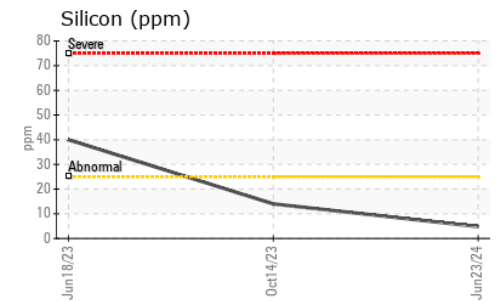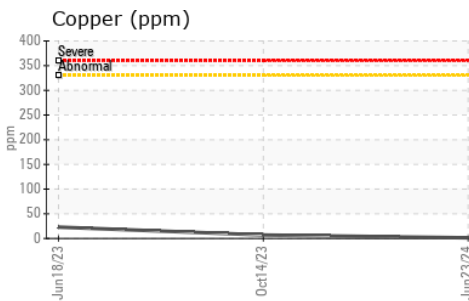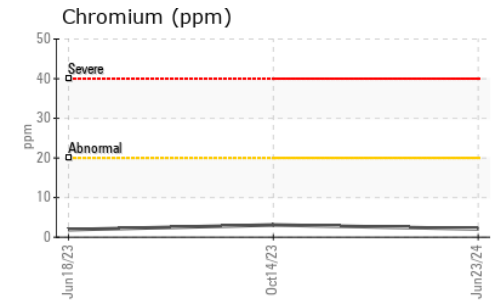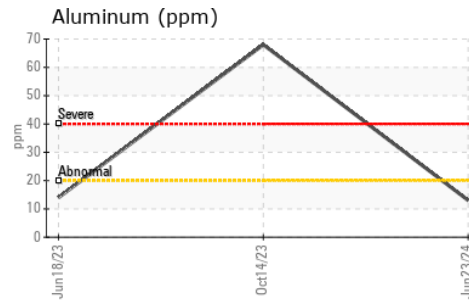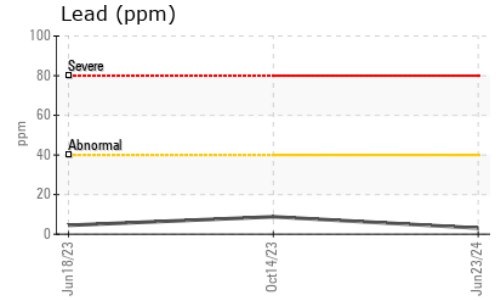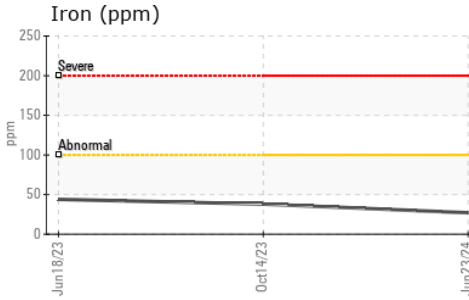

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **MANITOU LIN TRANSPORT (GARAGE)**  
**Sample No.** : WC0948277 **Received** : 09 Jul 2024 1335 SHAWSON DRIVE  
**Lab Number** : **02646554** **Tested** : 09 Jul 2024 MISSISSAUGA, ON  
**Unique Number** : 5812106 **Diagnosed** : 09 Jul 2024 - Wes Davis CA L4W 1C4  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

Contact: Shane Irwin  
sirwin@manitoulintransport.com

T: x:  
F: (905)564-6361