




OIL ANALYSIS REPORT

Sample Rating Trend

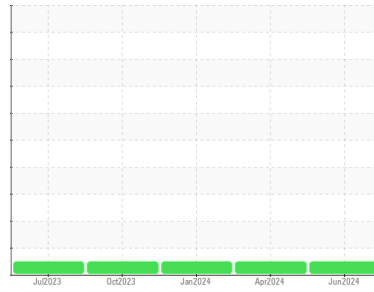

NORMAL



Machine Id

51973

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0948276	WC0915066	WC0844363
Sample Date	Client Info		22 Jun 2024	05 Apr 2024	14 Jan 2024
Machine Age	mls	Client Info	162784	1282316	93210
Oil Age	mls	Client Info	34553	35021	27338
Oil Changed	Client Info		Changed	Changed	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	18	3	2
Chromium	ppm	ASTM D5185(m)	>20	<1	0	0
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	0	0
Aluminum	ppm	ASTM D5185(m)	>20	7	<1	2
Lead	ppm	ASTM D5185(m)	>40	2	0	0
Copper	ppm	ASTM D5185(m)	>330	1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<1	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	2	9	7
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	59	52	56
Manganese	ppm	ASTM D5185(m)		<1	0	0
Magnesium	ppm	ASTM D5185(m)	450	980	941	928
Calcium	ppm	ASTM D5185(m)	3000	1065	1036	998
Phosphorus	ppm	ASTM D5185(m)	1150	1005	940	1002
Zinc	ppm	ASTM D5185(m)	1350	1217	1105	1130
Sulfur	ppm	ASTM D5185(m)	4250	2385	2497	2744
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	2	5
Sodium	ppm	ASTM D5185(m)		2	1	2
Potassium	ppm	ASTM D5185(m)	>20	18	<1	2

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.3	0	0
Nitration	Abs/cm	ASTM D7624*	>20	9.1	4.9	4.6
Sulfation	Abs./1mm	ASTM D7415*	>30	20.0	18.0	17.9



OIL ANALYSIS REPORT







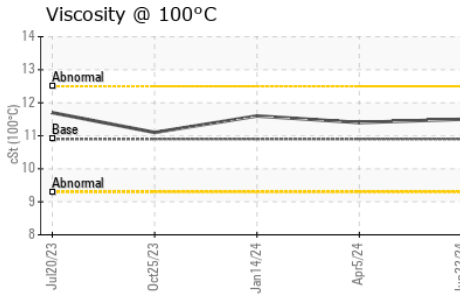
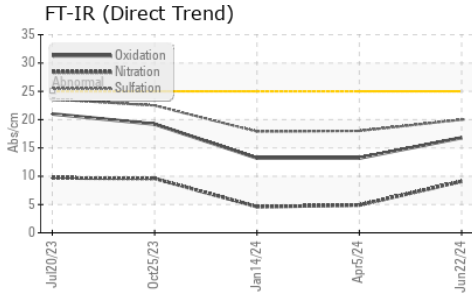


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	16.8	13.2	13.2

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.5	11.4	11.6

GRAPHS

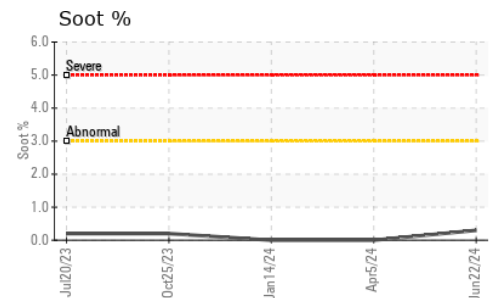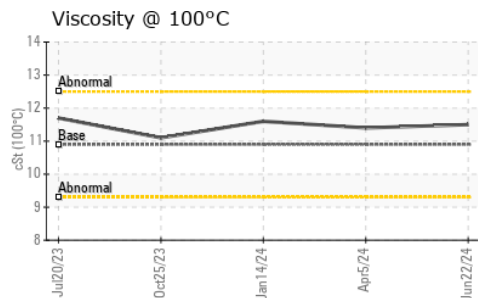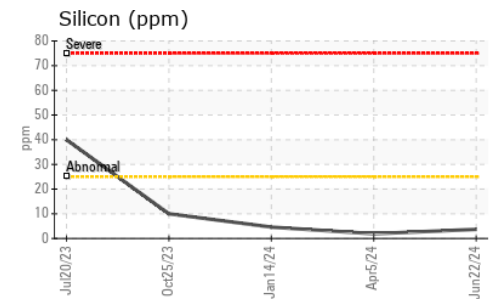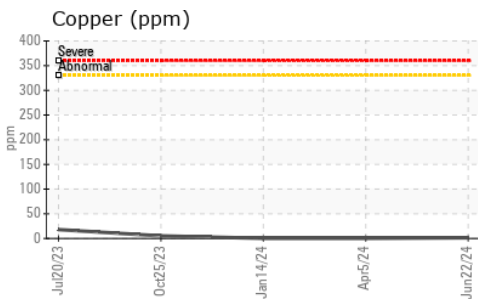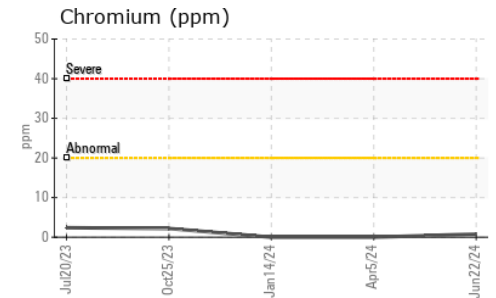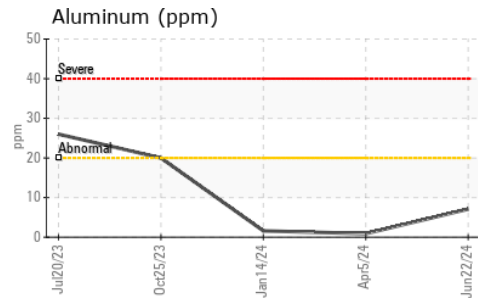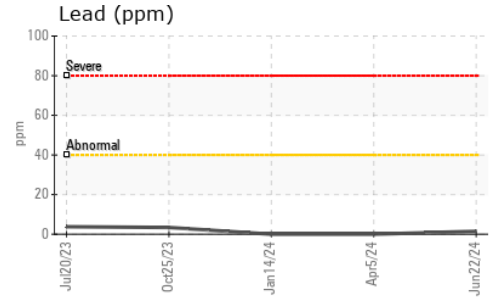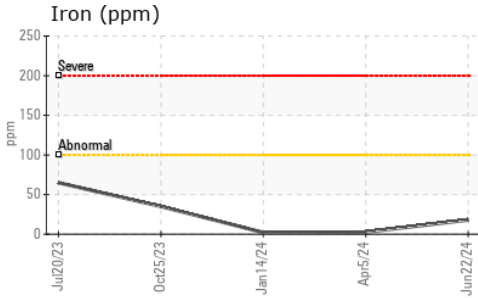

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **MANITOU LIN TRANSPORT (GARAGE)**
Sample No. : WC0948276 **Received** : 09 Jul 2024 1335 SHAWSON DRIVE
Lab Number : 02646556 **Tested** : 09 Jul 2024 MISSISSAUGA, ON
Unique Number : 5812108 **Diagnosed** : 09 Jul 2024 - Wes Davis CA L4W 1C4
Test Package : MOB 1 **Contact:** Travis Spence
 tspence@manitoulintransport.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

F: (905)564-6361