




# OIL ANALYSIS REPORT

Sample Rating Trend

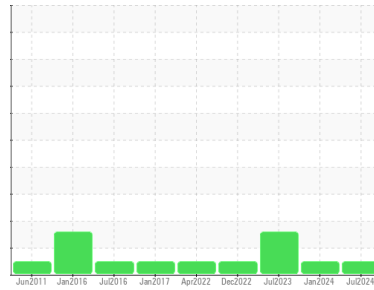

**NORMAL**



Area

**DEMO/53 RECAUSTICIZING**

Machine Id

**532857 #2 LIME MUD STOR AGIT (S/N 465467)**

Component

**Drive Reducer**

Fluid

**MOBIL SHC 629 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC</b>	WC	WC
Sample Date	Client Info	<b>03 Jul 2024</b>	03 Jan 2024	05 Jul 2023
Machine Age	mls Client Info	<b>0</b>	0	0
Oil Age	mls Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	0	53
Iron	ppm ASTM D5185(m) >200	<b>4</b>	4	66
Chromium	ppm ASTM D5185(m) >10	<b>0</b>	0	1
Nickel	ppm ASTM D5185(m) >10	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm ASTM D5185(m)	<b>0</b>	<1	<1
Lead	ppm ASTM D5185(m)	<b>0</b>	0	1
Copper	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	2
Tin	ppm ASTM D5185(m)	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m) >5	<b>&lt;1</b>	0	2
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Barium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	12
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	0	<1
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	2
Magnesium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Calcium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	15
Phosphorus	ppm ASTM D5185(m)	<b>409</b>	443	579
Zinc	ppm ASTM D5185(m)	<b>3</b>	3	24
Sulfur	ppm ASTM D5185(m)	<b>107</b>	156	99
Lithium	ppm ASTM D5185(m)	<b>4</b>	2	▲ 53

## CONTAMINANTS




method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m)	<b>18</b>	22	27
Sodium	ppm ASTM D5185(m)	<b>0</b>	<1	27
Potassium	ppm ASTM D5185(m) >20	<b>0</b>	<1	<1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	<b>0.41</b>	0.60	1.02




# OIL ANALYSIS REPORT

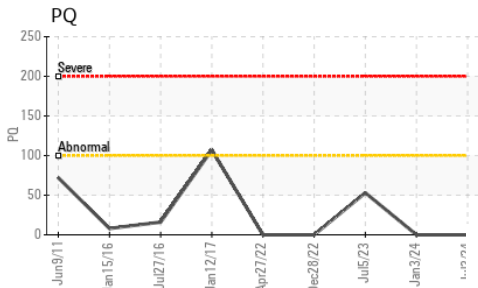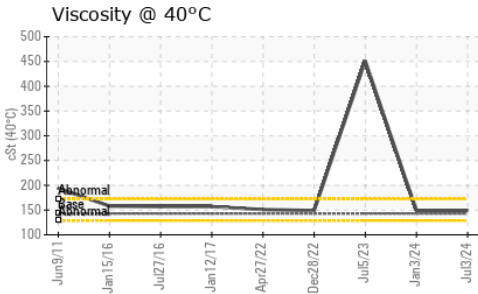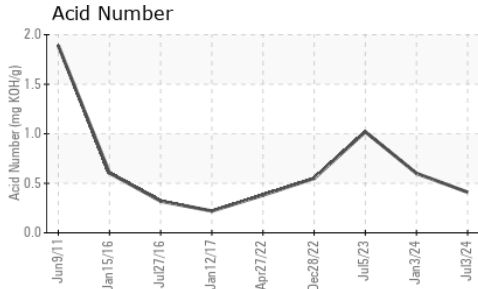






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	▲ WGOIL
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	142.8	149	▲ 451

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

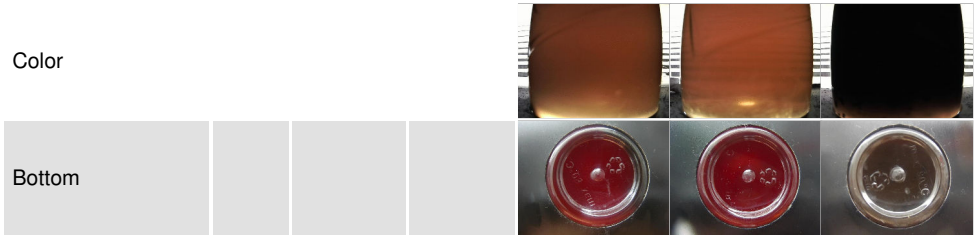

## GRAPHS

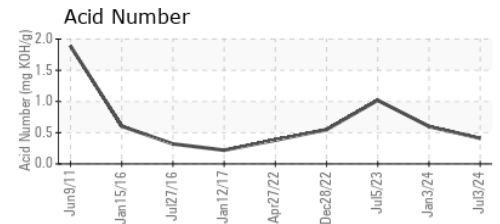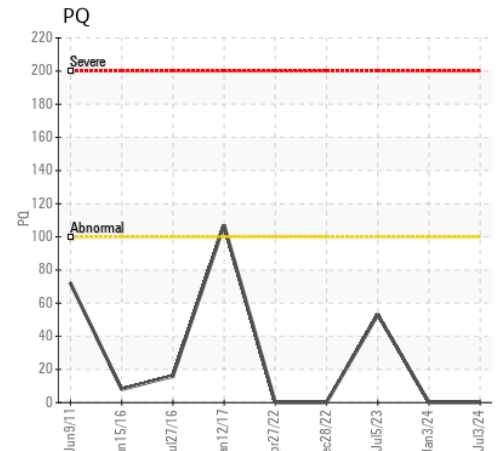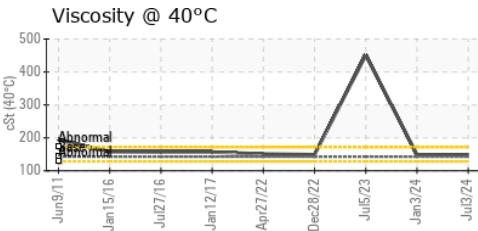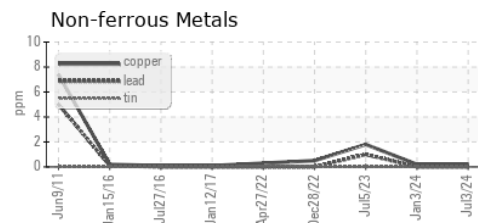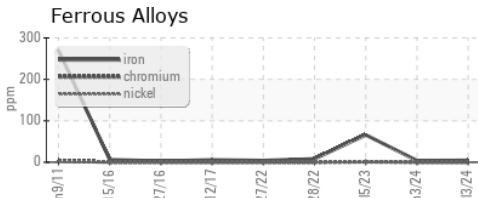

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02646779  
**Unique Number** : 5812331  
**Test Package** : IND 2 ( Additional Tests: TAN Man )  
**Received** : 09 Jul 2024  
**Tested** : 10 Jul 2024  
**Diagnosed** : 10 Jul 2024 - Wes Davis

**AV GROUP NB INC.**  
 103 PINDER ROAD,, NACKAWIC MILL  
 NACKAWIC, NB  
 CA E6G 1W4  
 Contact: Alan Vanwagoner  
 alan.vanwagoner@adityabirla.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.