



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Area

(C-FTAA) [5010.1.1]

Machine Id

[C-FTAA] BOMBARDIER CHALLENGER 300 20192

Component

1 Hydraulic System

Fluid

SKYDROL LD-4 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The water content is negligible. There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0948200	---	---
Sample Date	Client Info			25 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		<1	---	---
Aluminum	ppm	ASTM D5185(m)	>10	0	---	---
Lead	ppm	ASTM D5185(m)	>20	0	---	---
Copper	ppm	ASTM D5185(m)	>20	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		<1	---	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	2	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	0	0	---	---
Calcium	ppm	ASTM D5185(m)	0	2	---	---
Phosphorus	ppm	ASTM D5185(m)	20000	34002	---	---
Zinc	ppm	ASTM D5185(m)	0	2	---	---
Sulfur	ppm	ASTM D5185(m)	1900	1556	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	---	---
Sodium	ppm	ASTM D5185(m)		3	---	---
Potassium	ppm	ASTM D5185(m)	>20	19	---	---
Water	%	ASTM D6304*	>0.6	0.394	---	---
ppm Water	ppm	ASTM D6304*	>6000	3946	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>128000	32632	---	---
Particles 15-25µm	count	NAS 1638	>22800	3864	---	---
Particles 25-50µm	count	NAS 1638	>4050	2604	---	---
Particles 50-100µm	count	NAS 1638	>720	327	---	---
Particles >100µm	count	NAS 1638	>128	59	---	---
NAS 1638	Class	NAS 1638	>9	9	---	---



OIL ANALYSIS REPORT

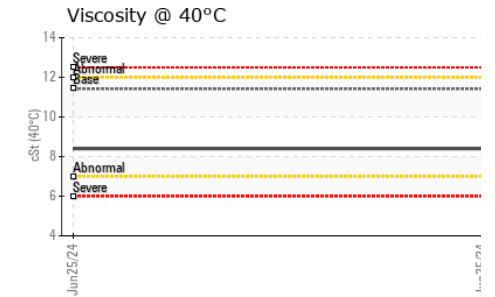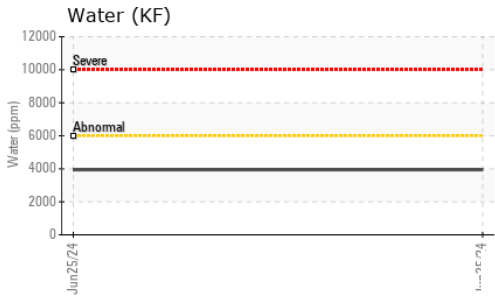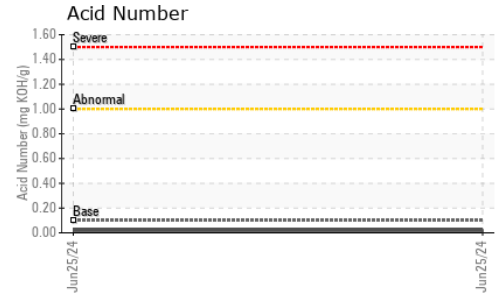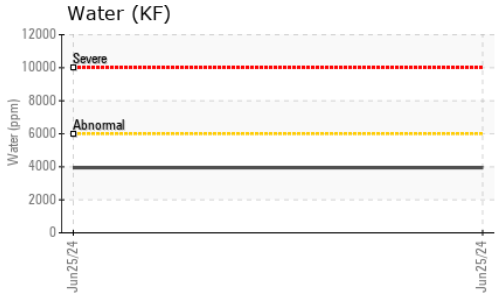

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.10	0.02	---	---






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.6	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	11.42	8.4	---	---

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

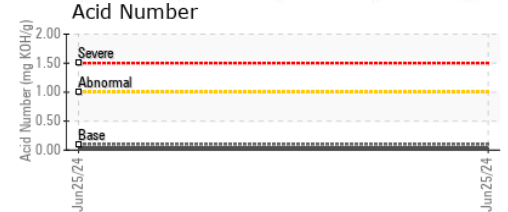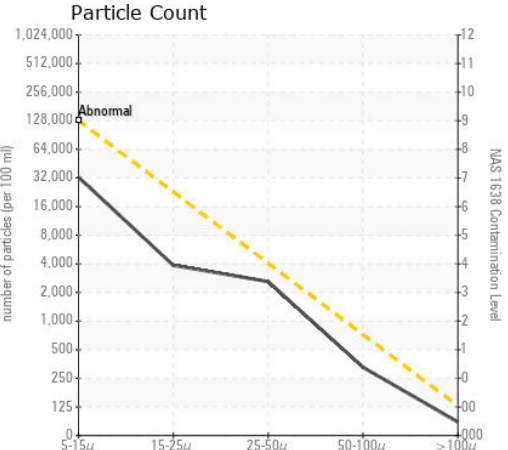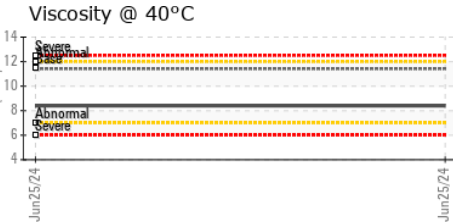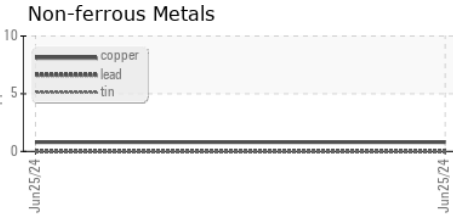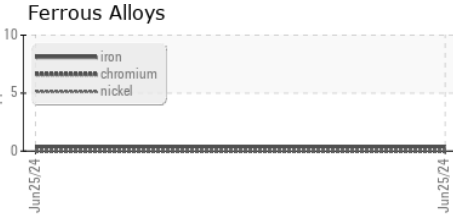

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0948200 **Received** : 09 Jul 2024
Lab Number : **02646827** **Tested** : 15 Jul 2024
Unique Number : 5812379 **Diagnosed** : 15 Jul 2024 - Kevin Marson
Test Package : IND 2 (Additional Tests: KF, PrtCountNAS, TAN Man)

STARLINK AVIATION INC
 9025 RYAN AVENUE
 DORVAL, QC
 CA H9P 1A2
 Contact: Stephanie Silverman
 stephaniesilverman@starlinkaviation.com
 T: (514)828-3848
 F: (514)631-7501

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.