




OIL ANALYSIS REPORT

Sample Rating Trend

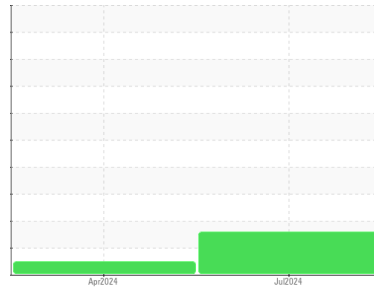

DIRT



Machine Id
CESSNA C-GIEN

Component
Piston Aircraft Engine

Fluid
SHELL AEROSHELL OIL W 100 PLUS (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate concentration of dirt present in the oil.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0935049	WC0935046	---
Sample Date	Client Info		09 Jul 2024	12 Apr 2024	---
TSN	hrs	Client Info	1900	0	---
TSO	hrs	Client Info	35	1800	---
Oil Age	hrs	Client Info	0	40	---
Oil Changed		Client Info	Changed	Changed	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	---
Water	WC Method	>0.1	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	24	28
Chromium	ppm	ASTM D5185(m)	>20	8	6
Nickel	ppm	ASTM D5185(m)	>15	6	6
Titanium	ppm	ASTM D5185(m)		<1	0
Silver	ppm	ASTM D5185(m)	>5	0	0
Aluminum	ppm	ASTM D5185(m)	>25	11	9
Lead	ppm	ASTM D5185(m)	>20000	1783	1983
Copper	ppm	ASTM D5185(m)	>25	8	7
Tin	ppm	ASTM D5185(m)	>30	<1	0
Antimony	ppm	ASTM D5185(m)		0	0
Vanadium	ppm	ASTM D5185(m)		0	0
Beryllium	ppm	ASTM D5185(m)		0	0
Cadmium	ppm	ASTM D5185(m)		3	1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		4	6
Barium	ppm	ASTM D5185(m)	0	<1	0
Molybdenum	ppm	ASTM D5185(m)		3	2
Manganese	ppm	ASTM D5185(m)		0	0
Magnesium	ppm	ASTM D5185(m)	0	2	3
Calcium	ppm	ASTM D5185(m)	0	167	227
Phosphorus	ppm	ASTM D5185(m)		73	87
Zinc	ppm	ASTM D5185(m)	0	58	105
Sulfur	ppm	ASTM D5185(m)	2600	3072	3114
Lithium	ppm	ASTM D5185(m)		<1	<1

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	▲ 20	15
Sodium	ppm	ASTM D5185(m)		1	2
Potassium	ppm	ASTM D5185(m)	>20	1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	---
Nitration	Abs/cm	ASTM D7624*	>20	7.5	---
Sulfation	Abs.1mm	ASTM D7415*	>30	20.6	---



OIL ANALYSIS REPORT

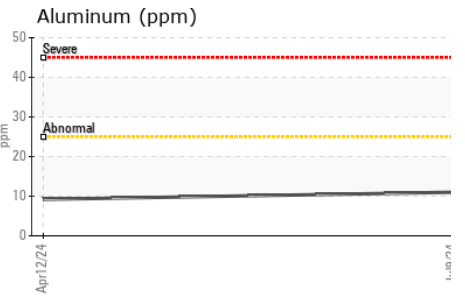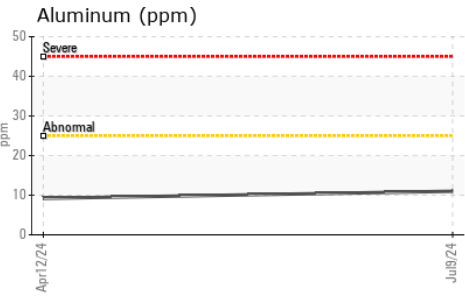
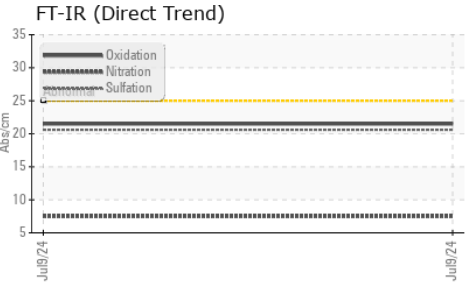
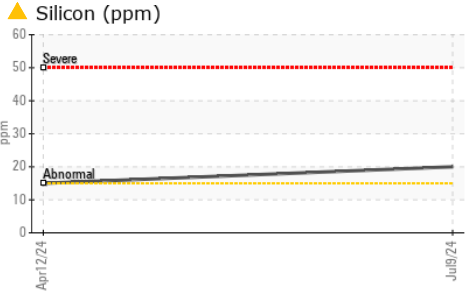


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	21.5	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	19.96	20.3	19.3	---

GRAPHS

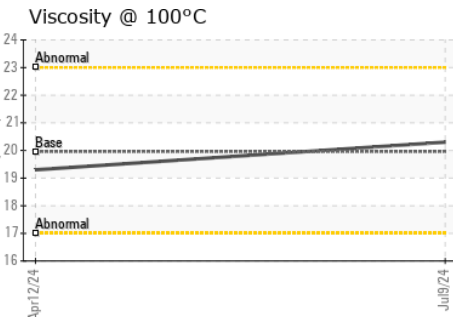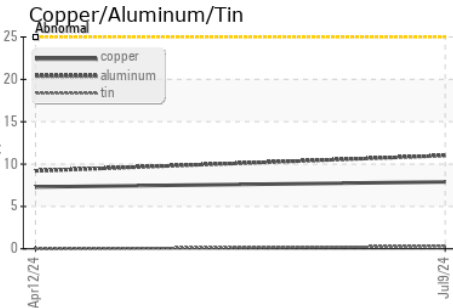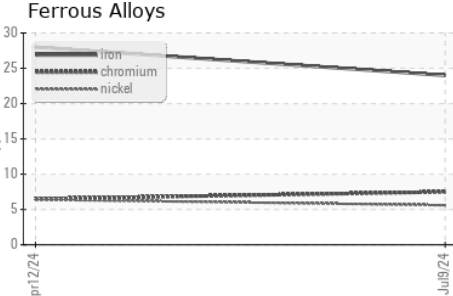

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0935049 **Received** : 10 Jul 2024
Lab Number : **02646853** **Tested** : 11 Jul 2024
Unique Number : 5812405 **Diagnosed** : 11 Jul 2024 - Kevin Marson
Test Package : AVI 1 (Additional Tests: FT-IR)

SKEATES CONTRACTING
 PO BOX 1142
 WATERDOWN, ON
 CA L0R 2H0
 Contact: Aaron Skeates
 aaron@skeates.ca
 T: (905)407-8702
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.