




# OIL ANALYSIS REPORT

## Sample Rating Trend

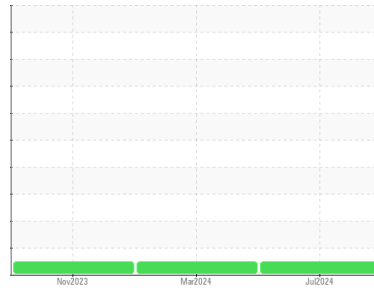

**NORMAL**



Machine Id

**100-049**

Component

**Diesel Engine**

Fluid

**PETRO CANADA 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0952905</b>	WC0920811	WC0872867
Sample Date	Client Info			<b>03 Jul 2024</b>	21 Mar 2024	20 Nov 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>5</b>	8	7
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>4	<b>1</b>	4	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	2	7
Copper	ppm	ASTM D5185(m)	>330	<b>16</b>	58	244
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>2</b>	<1	3
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)		<b>60</b>	61	62
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>999</b>	1004	912
Calcium	ppm	ASTM D5185(m)		<b>1044</b>	1080	1144
Phosphorus	ppm	ASTM D5185(m)		<b>1016</b>	1023	1000
Zinc	ppm	ASTM D5185(m)		<b>1202</b>	1222	1207
Sulfur	ppm	ASTM D5185(m)		<b>2632</b>	2418	2438
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	9	7
Sodium	ppm	ASTM D5185(m)		<b>1</b>	<1	2
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.7</b>	8.5	8.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.4</b>	20.3	20.5



# OIL ANALYSIS REPORT

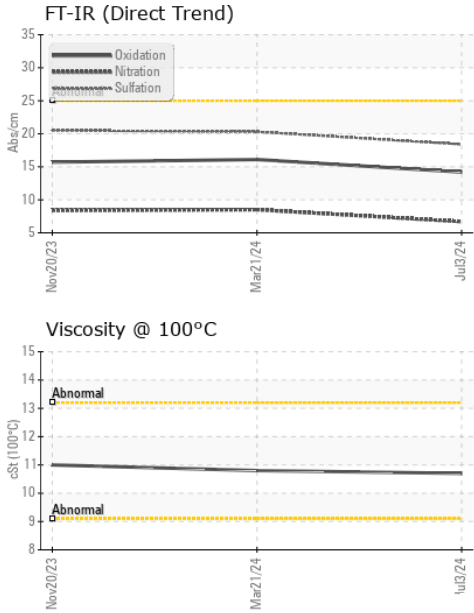


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>14.2</b>	16.1	15.7

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	<b>10.7</b>	10.8	11.0

## GRAPHS

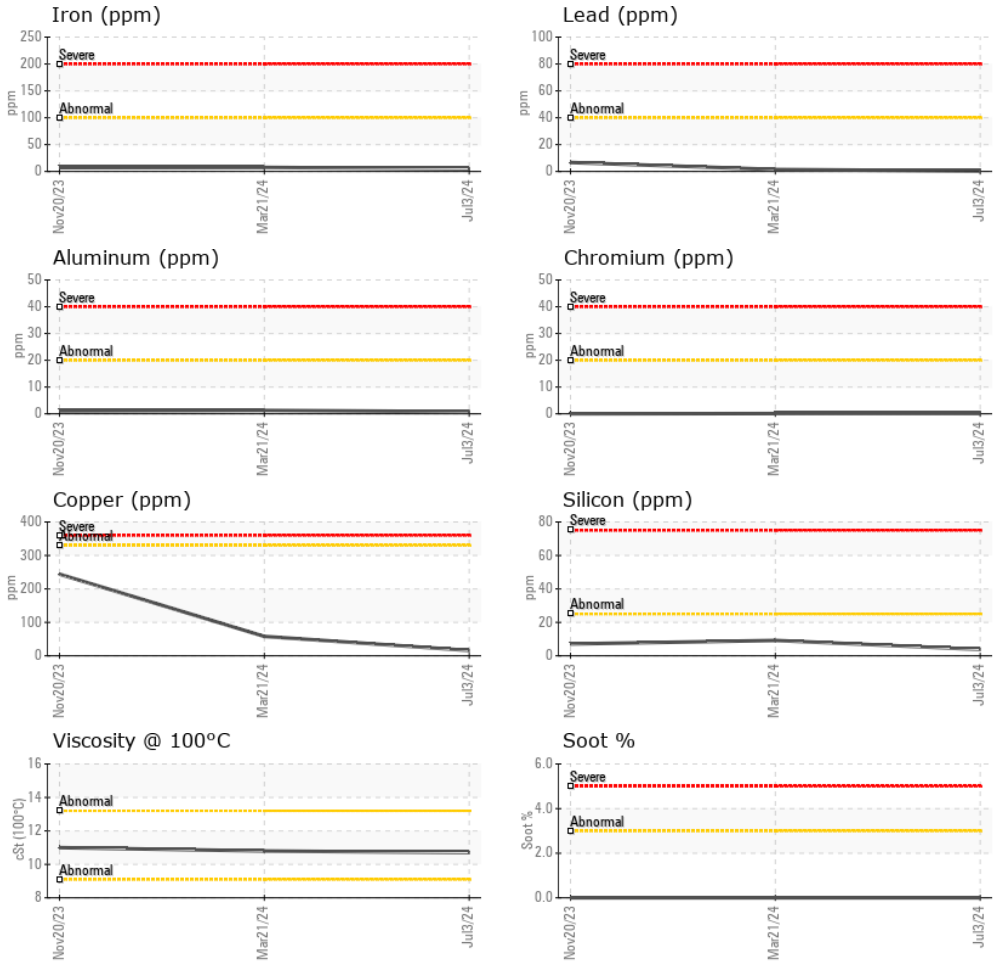

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **RONI/IRON SHORE EXCAVATING LTD.**  
**Sample No.** : WC0952905 **Received** : 10 Jul 2024 100 MACINTOSH BLVD  
**Lab Number** : **02646961** **Tested** : 10 Jul 2024 VAUGHAN, ON  
**Unique Number** : 5812513 **Diagnosed** : 10 Jul 2024 - Kevin Marson CA L4K 4P3  
**Test Package** : MOBCE ( Additional Tests: Visual )  
 Contact: Nathan Fernandes  
 alfonse.sean@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.