

OIL ANALYSIS REPORT

Strathcona - S07600 A2407047

Unknown Component

{not provided} (--- GAL)

Sample Rating Trend **WEAR**

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

Wear

Copper, iron and lead ppm levels are noted.

				Jul2024		
SAMPLE INFORMA	ATION	method	limit/base	current	history1	history2
Batch #		Client Info		2024 06 0790		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		2024-07-09		
Sample Number		Client Info		E30002601		
Sample Date		Client Info		09 Jul 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		1 7		
	ppm	ASTM D5185(m)		0		
	ppm	ASTM D5185(m)		<1		
	ppm	ASTM D5185(m)		<1		
	ppm	ASTM D5185(m)		<1		
	ppm	ASTM D5185(m)		2		
	ppm	ASTM D5185(m)		<u> </u>		
	ppm	ASTM D5185(m)		160		
	ppm	ASTM D5185(m)		5		
	ppm	ASTM D5185(m)		0		
•	ppm	ASTM D5185(m)		0		
	ppm	ASTM D5185(m)		0		
•		ASTM D5105(m) ASTM D5185(m)		0		
	ppm	. ,				
ADDITIVES		method	limit/base	current	history1	history2
	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		43		
Calcium	ppm	ASTM D5185(m)		288		
Phosphorus	ppm	ASTM D5185(m)		355		
Zinc	ppm	ASTM D5185(m)		378		
Sulfur	ppm	ASTM D5185(m)		1865		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		6		
Sodium	ppm	ASTM D5185(m)		5		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.004		


ppm Water

ppm ASTM D6304*

48



OIL ANALYSIS REPORT

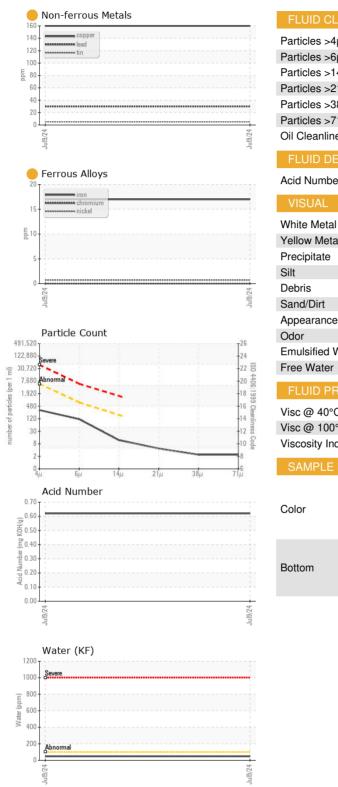

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	277		
Particles >6µm		ASTM D7647	>640	101		
Particles >14µm		ASTM D7647	>160	10		
Particles >21µm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647	>3	2		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	15/14/10		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.62		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	TES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		116		
Visc @ 100°C	cSt	ASTM D7279(m)		12.5		
Viscosity Index (VI)	Scale	ASTM D2270*		98		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02647004 Unique Number : 5812556

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : E30002601

Received : 10 Jul 2024 **Tested** : 11 Jul 2024 : 12 Jul 2024 - Aylwin Lee Diagnosed

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950