


OIL ANALYSIS REPORT



RONI Machine Id **Hydraulic System** JOHN DEERE HYDRAU (--- GAL)





Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

U (GAL)			Jun2023	Jun2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0932546	LH0270800	
Sample Date		Client Info		27 Jun 2024	30 Jun 2023	
Machine Age	hrs	Client Info		0	5423	
Oil Age	hrs	Client Info		0	0	
Oil Changed	1110	Client Info		Changed	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.075	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>23	6	5	
Chromium	ppm	ASTM D5185(m)	>9	<1	<1	
Nickel	ppm	ASTM D5185(m)	>5	<1	0	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	<1	
Aluminum	ppm	ASTM D5185(m)	>9	1	1	
Lead	ppm	ASTM D5185(m)	>28	<1	<1	
Copper	ppm	ASTM D5185(m)	>51	6	4	
Tin	ppm	ASTM D5185(m)	>5	0	0	
Antimony	ppm	ASTM D5185(m)		0	0	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	<1	
Barium	ppm	ASTM D5185(m)		0	0	
Molybdenum	ppm	ASTM D5185(m)		0	0	
Manganese	ppm	ASTM D5185(m)		0	0	
Magnesium	ppm	ASTM D5185(m)		1	1	
Calcium	ppm	ASTM D5185(m)	87	133	133	
Phosphorus	ppm	ASTM D5185(m)	727	631	667	
Zinc	ppm	ASTM D5185(m)	900	800	798	
Sulfur	ppm	ASTM D5185(m)	1500	1448	1438	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>31	2	3	
Sodium	ppm	ASTM D5185(m)	>21	<1	<1	
Potassium	ppm	ASTM D5185(m)	>20	1	<1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>80000	2223	12055	
Particles >6µm		ASTM D7647	>20000	250	1271	
Particles >14µm		ASTM D7647	>640	14	37	
Particles >21µm		ASTM D7647	>160	4	5	
Particles >38µm		ASTM D7647	>40	1	0	
Particles >71µm		ASTM D7647	>10	1	0	
Oil Cleanliness		ISO 4406 (c)	>23/21/16	18/15/11	21/17/12	



OIL ANALYSIS REPORT

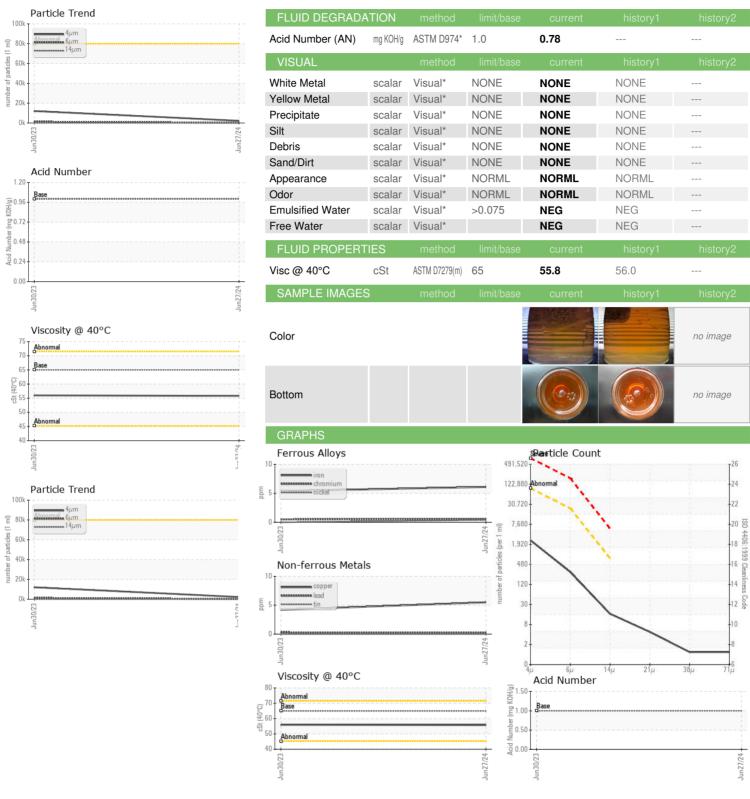



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: WC0932546 Lab Number : 02647048 Unique Number : 5812600

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 RONI/IRON SHORE EXCAVATING LTD. Received : 10 Jul 2024 **Tested** : 11 Jul 2024

Diagnosed Test Package : MOBCE

: 11 Jul 2024 - Wes Davis

100 MACINTOSH BLVD VAUGHAN, ON CA L4K 4P3

Contact: Service Team service.team@roni.ca T:

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F: