




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
RONI
 Machine Id
370
 Component
Right Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

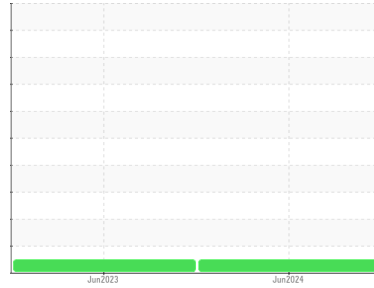

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0932548	LH0270801	---
Sample Date	Client Info		26 Jun 2024	30 Jun 2023	---
Machine Age	hrs	Client Info	0	5423	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.075	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >750	59	46	---
Chromium	ppm	ASTM D5185(m) >9	2	1	---
Nickel	ppm	ASTM D5185(m) >10	<1	<1	---
Titanium	ppm	ASTM D5185(m)	<1	<1	---
Silver	ppm	ASTM D5185(m)	0	0	---
Aluminum	ppm	ASTM D5185(m) >40	10	6	---
Lead	ppm	ASTM D5185(m) >15	0	0	---
Copper	ppm	ASTM D5185(m) >40	<1	<1	---
Tin	ppm	ASTM D5185(m) >10	0	0	---
Antimony	ppm	ASTM D5185(m) >5	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	<1	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 6	48	41	---
Barium	ppm	ASTM D5185(m) 0	<1	0	---
Molybdenum	ppm	ASTM D5185(m) 0	2	1	---
Manganese	ppm	ASTM D5185(m)	1	<1	---
Magnesium	ppm	ASTM D5185(m) 145	100	98	---
Calcium	ppm	ASTM D5185(m) 3570	3205	3188	---
Phosphorus	ppm	ASTM D5185(m) 1290	1032	1097	---
Zinc	ppm	ASTM D5185(m) 1640	1136	1147	---
Sulfur	ppm	ASTM D5185(m)	3997	3907	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >75	37	24	---
Sodium	ppm	ASTM D5185(m) >51	3	2	---
Potassium	ppm	ASTM D5185(m) >20	4	3	---



OIL ANALYSIS REPORT

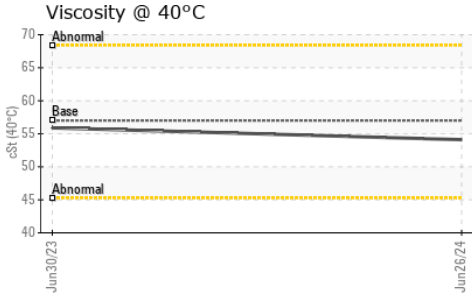









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.075	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	57.0	54.1	55.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color						no image
Bottom						no image

GRAPHS

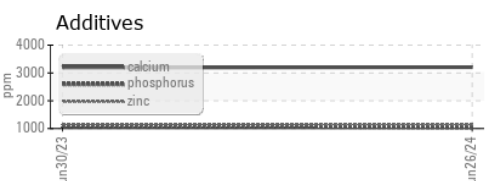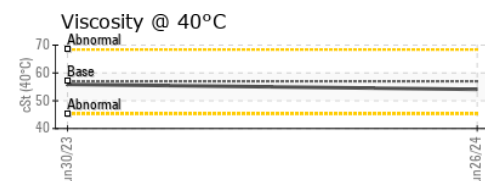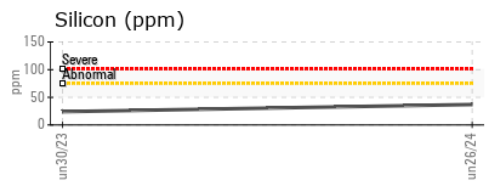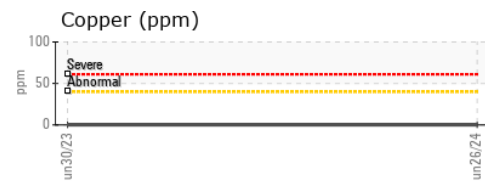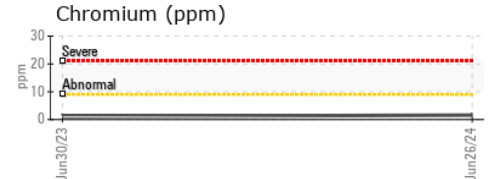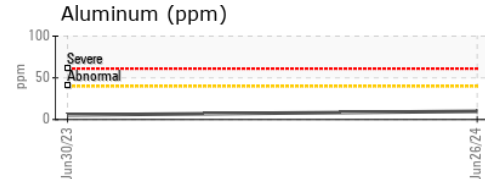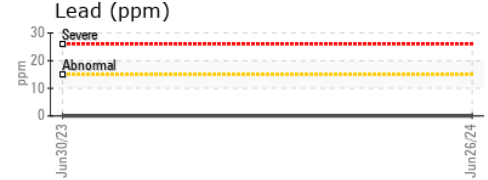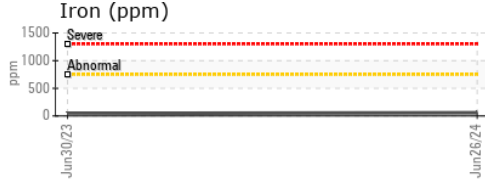

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0932548
Lab Number : 02647154
Unique Number : 5812706
Test Package : MOBCE
Received : 10 Jul 2024
Tested : 10 Jul 2024
Diagnosed : 10 Jul 2024 - Wes Davis

RONI/IRON SHORE EXCAVATING LTD.
 100 MACINTOSH BLVD
 VAUGHAN, ON
 CA L4K 4P3
 Contact: Service Team
 service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.