




OIL ANALYSIS REPORT

Area
RONI
 Machine Id
453
 Component
Rear Left Final Drive
 Fluid
PETRO CANADA 30W (--- GAL)

Sample Rating Trend

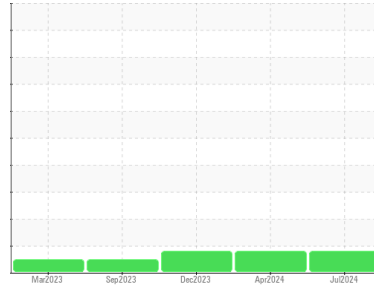

WEAR



DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

▲ Wear

Nickel ppm levels are abnormal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0952981	WC0920851	WC0888429
Sample Date	Client Info		06 Jul 2024	10 Apr 2024	20 Dec 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			ABNORMAL	ABNORMAL	MARGINAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>800	214	128	97
Chromium	ppm	ASTM D5185(m)	>10	2	1	<1
Nickel	ppm	ASTM D5185(m)	>5	▲ 10	▲ 7	▲ 5
Titanium	ppm	ASTM D5185(m)	>15	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>75	1	<1	2
Lead	ppm	ASTM D5185(m)	>10	0	0	<1
Copper	ppm	ASTM D5185(m)	>75	19	16	13
Tin	ppm	ASTM D5185(m)	>8	<1	0	0
Antimony	ppm	ASTM D5185(m)	>50	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		5	4	4
Barium	ppm	ASTM D5185(m)		<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<1	0	0
Manganese	ppm	ASTM D5185(m)		3	2	1
Magnesium	ppm	ASTM D5185(m)		818	732	706
Calcium	ppm	ASTM D5185(m)		1313	1418	1413
Phosphorus	ppm	ASTM D5185(m)		1422	1568	1533
Zinc	ppm	ASTM D5185(m)		1269	1232	1232
Sulfur	ppm	ASTM D5185(m)		3190	3322	3463
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>400	7	5	5
Sodium	ppm	ASTM D5185(m)		3	3	3
Potassium	ppm	ASTM D5185(m)	>20	1	1	2


OIL ANALYSIS REPORT

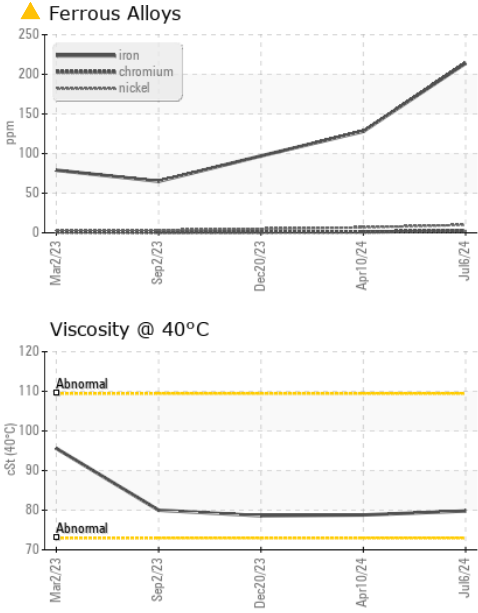


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	79.8	78.8	78.6

SAMPLE IMAGES

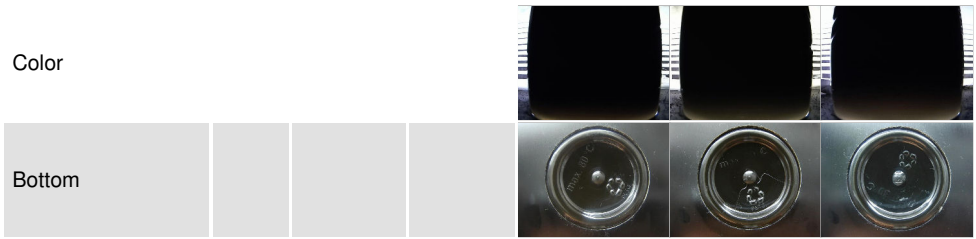

GRAPHS

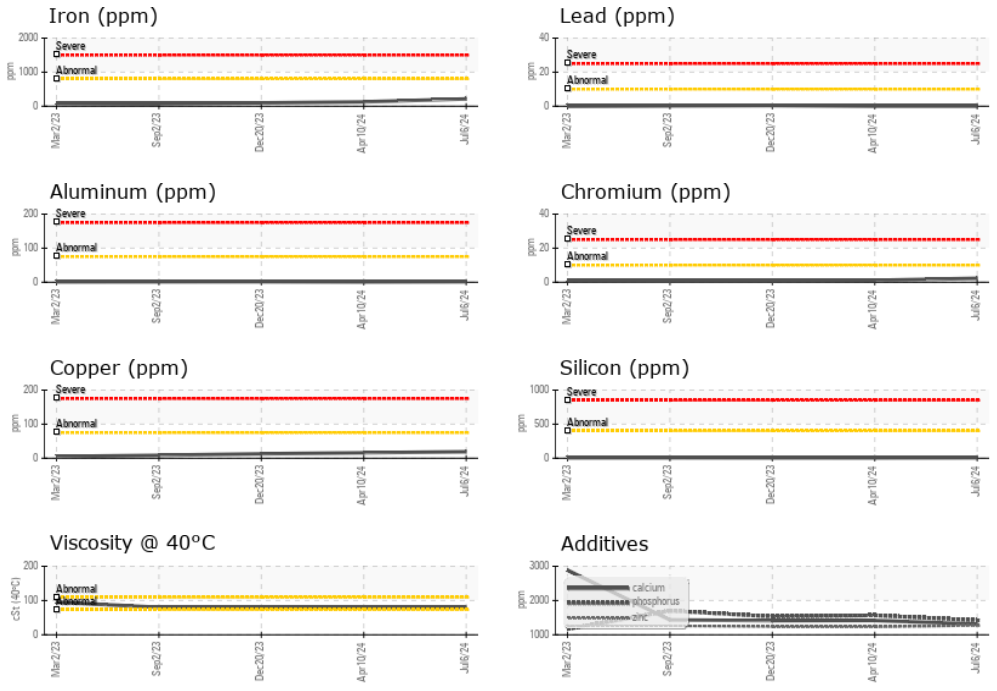

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **RONI/IRON SHORE EXCAVATING LTD.**
Sample No. : WC0952981 **Received** : 10 Jul 2024 **100 MACINTOSH BLVD**
Lab Number : **02647164** **Tested** : 11 Jul 2024 **VAUGHAN, ON**
Unique Number : 5812716 **Diagnosed** : 11 Jul 2024 - Kevin Marson **CA L4K 4P3**
Test Package : MOBCE **Contact:** Service Team **service.team@roni.ca**

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.