




OIL ANALYSIS REPORT

Area
RONI
 Machine Id
453
 Component
Rear Right Final Drive
 Fluid
PETRO CANADA 30W (--- GAL)

Sample Rating Trend

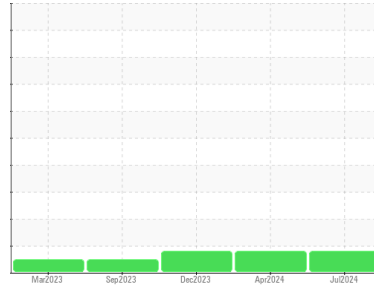

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Nickel ppm levels are abnormal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0952980	WC0920850	WC0888426
Sample Date	Client Info		06 Jul 2024	10 Apr 2024	20 Dec 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			ABNORMAL	ABNORMAL	MARGINAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>800	219	128	98
Chromium	ppm	ASTM D5185(m)	>10	2	1	<1
Nickel	ppm	ASTM D5185(m)	>5	▲ 10	▲ 7	▲ 5
Titanium	ppm	ASTM D5185(m)	>15	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>75	1	<1	1
Lead	ppm	ASTM D5185(m)	>10	0	0	<1
Copper	ppm	ASTM D5185(m)	>75	19	15	13
Tin	ppm	ASTM D5185(m)	>8	<1	0	0
Antimony	ppm	ASTM D5185(m)	>50	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		5	4	5
Barium	ppm	ASTM D5185(m)		<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<1	0	0
Manganese	ppm	ASTM D5185(m)		3	2	1
Magnesium	ppm	ASTM D5185(m)		820	736	710
Calcium	ppm	ASTM D5185(m)		1319	1428	1389
Phosphorus	ppm	ASTM D5185(m)		1424	1554	1528
Zinc	ppm	ASTM D5185(m)		1273	1234	1214
Sulfur	ppm	ASTM D5185(m)		3186	3284	4060
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>400	7	5	5
Sodium	ppm	ASTM D5185(m)		3	4	3
Potassium	ppm	ASTM D5185(m)	>20	2	2	2

OIL ANALYSIS REPORT

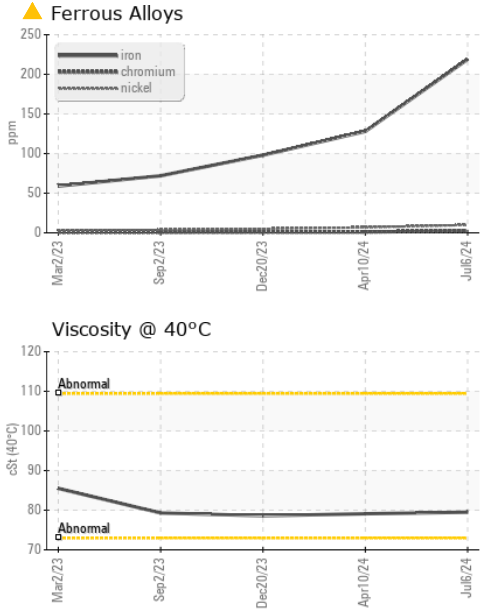


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	79.5	79.1	78.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

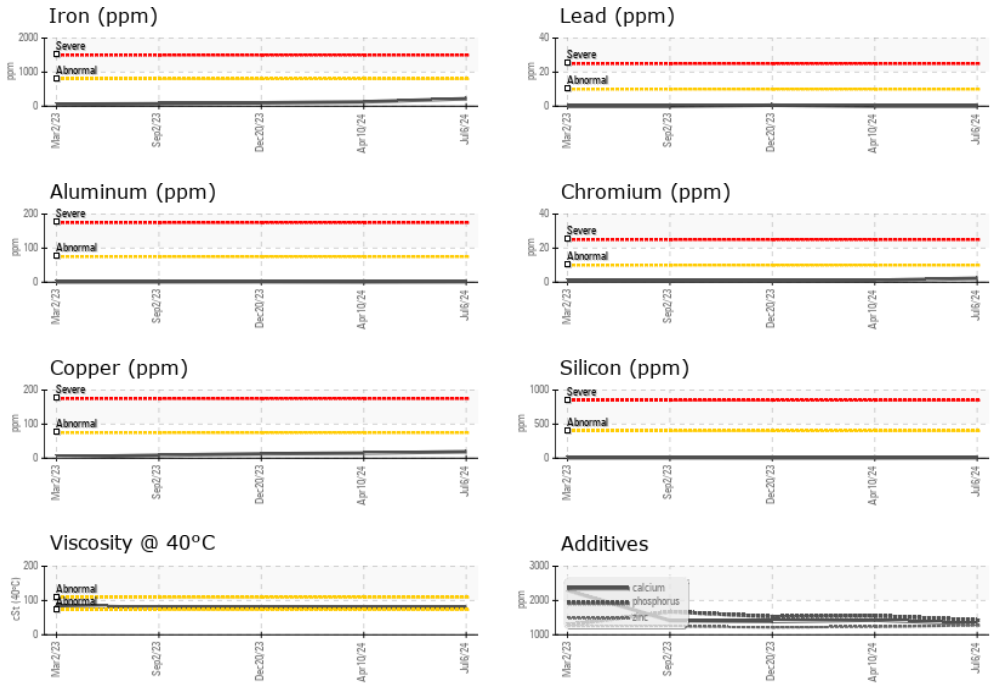

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0952980
Lab Number : **02647165**
Unique Number : 5812717
Test Package : MOBCE

RONI/IRON SHORE EXCAVATING LTD.
 100 MACINTOSH BLVD
 VAUGHAN, ON
 CA L4K 4P3
 Contact: Service Team
 service.team@roni.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.