




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

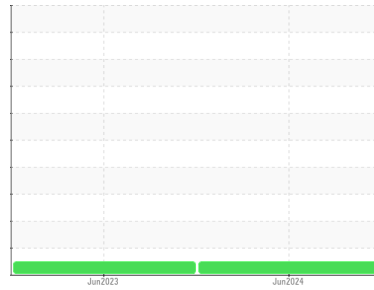

Area
RONI
 Machine Id

172
 Component
Swing Drive

Fluid
PETRO CANADA TRAXON 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0932566	LH0256969	---
Sample Date	Client Info		14 Jun 2024	01 Jun 2023	---
Machine Age	hrs	Client Info	0	6972	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed	Client Info		Not Chngd	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.25	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >1200	25	41	---
Chromium	ppm	ASTM D5185(m) >10	<1	<1	---
Nickel	ppm	ASTM D5185(m) >10	<1	0	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m)	<1	0	---
Aluminum	ppm	ASTM D5185(m) >25	<1	<1	---
Lead	ppm	ASTM D5185(m) >50	0	0	---
Copper	ppm	ASTM D5185(m) >50	2	2	---
Tin	ppm	ASTM D5185(m) >10	0	0	---
Antimony	ppm	ASTM D5185(m) >5	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	0	0	---

ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 243	258	248	---
Barium	ppm	ASTM D5185(m) 1	0	0	---
Molybdenum	ppm	ASTM D5185(m)	0	0	---
Manganese	ppm	ASTM D5185(m)	<1	<1	---
Magnesium	ppm	ASTM D5185(m) 2	2	1	---
Calcium	ppm	ASTM D5185(m) 6	9	33	---
Phosphorus	ppm	ASTM D5185(m) 987	1017	1103	---
Zinc	ppm	ASTM D5185(m) 1	7	12	---
Sulfur	ppm	ASTM D5185(m) 21530	17865	17697	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >100	6	10	---
Sodium	ppm	ASTM D5185(m)	<1	<1	---
Potassium	ppm	ASTM D5185(m) >20	<1	<1	---



OIL ANALYSIS REPORT

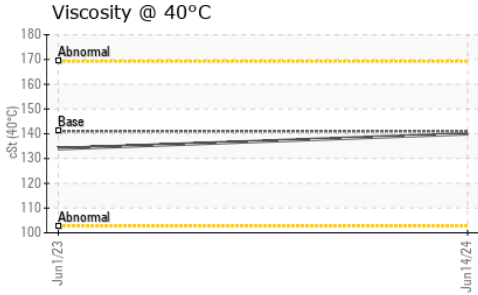


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.25	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	141.0	140	134	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image
Bottom					no image

GRAPHS

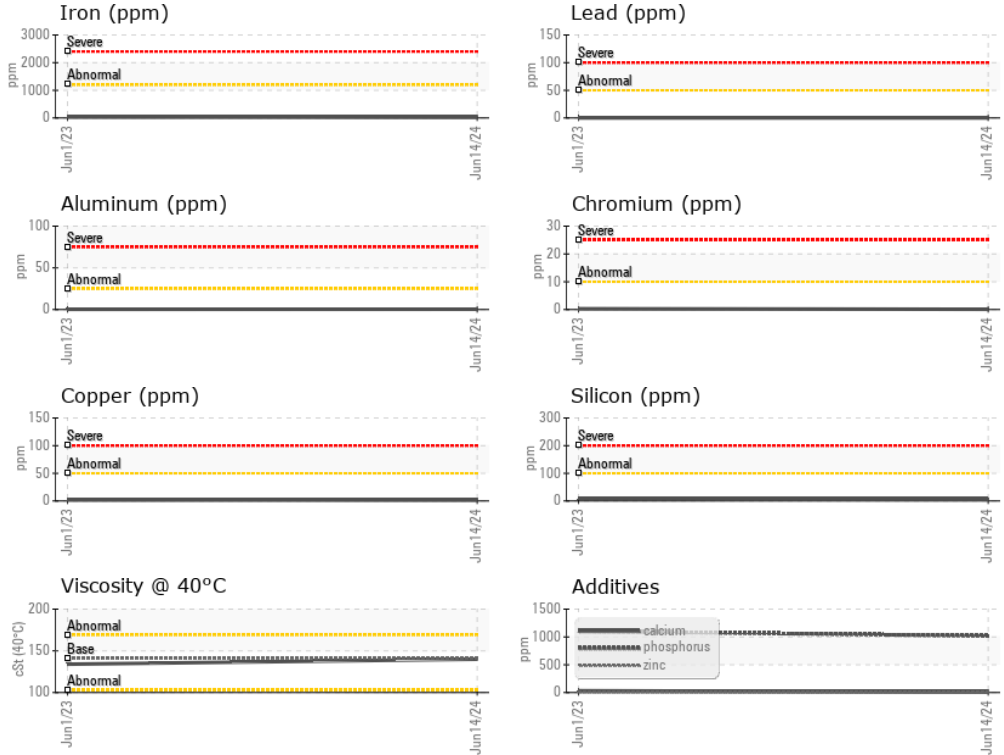

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **RONI/IRON SHORE EXCAVATING LTD.**
Sample No. : WC0932566 **Received** : 10 Jul 2024 100 MACINTOSH BLVD
Lab Number : **02647184** **Tested** : 10 Jul 2024 VAUGHAN, ON
Unique Number : 5812736 **Diagnosed** : 10 Jul 2024 - Wes Davis CA L4K 4P3
Test Package : MOBCE

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Service Team
 service.team@roni.ca
 T:
 F: