


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id C2 (S/N CCA4-442L)

Gearbox

GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL ISO 220. Please confirm.

NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jun 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0918453		
Sample Date		Client Info		20 Jun 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		41		
Iron	ppm	ASTM D5185(m)	>200	48		
Chromium	ppm	ASTM D5185(m)	>15	<1		
Nickel	ppm	ASTM D5185(m)	>15	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	<1		
Lead	ppm	ASTM D5185(m)	>100	0		
Copper	ppm	ASTM D5185(m)	>200	<1		
Tin	ppm	ASTM D5185(m)	>25	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	17		
Barium	ppm	ASTM D5185(m)	15	 <1		
Molybdenum	ppm	ASTM D5185(m)	15	0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)	50	8		
Calcium	ppm	ASTM D5185(m)	50	11		
Phosphorus	ppm	ASTM D5185(m)	350	333		
Zinc	ppm	ASTM D5185(m)	100	15		
Sulfur	ppm	ASTM D5185(m)	12500	14426		
Lithium	ppm	ASTM D5185(m)		3		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	0.74		



OIL ANALYSIS REPORT

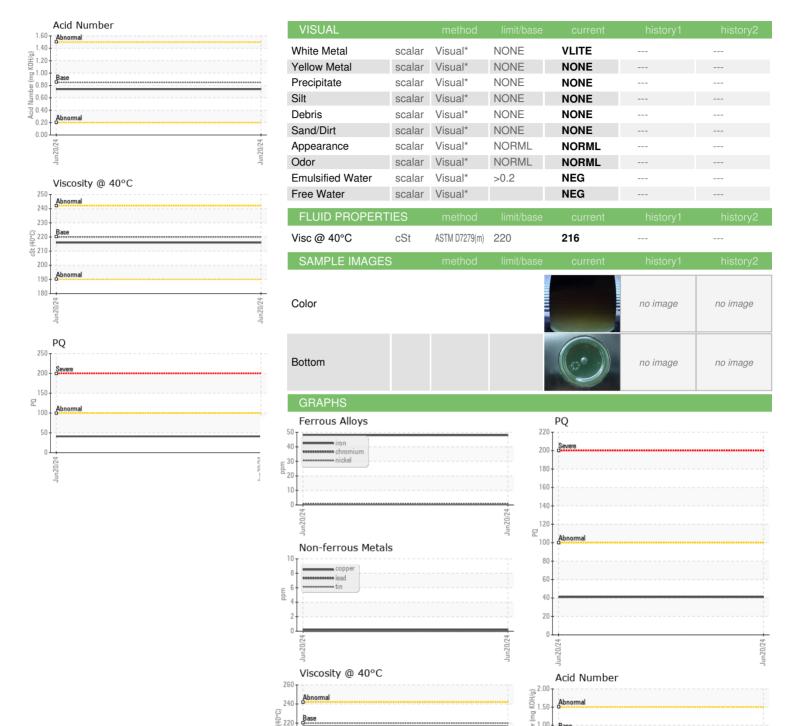





Laboratory

Sample No.

Laboratory

Lab Number : 02647200 Unique Number : 5812752

180

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0918453

Received : 10 Jul 2024 **Tested** Diagnosed

: 11 Jul 2024 : 11 Jul 2024 - Wes Davis

Test Package : IND 2 (Additional Tests: TAN Man) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Machinex Recycling Services Inc.

817 Brock Rd. Pickering, ON **CA L1W 3L9**

Contact: Nicole Hendrickson nhendrickson@machinexrt.ca T: (905)420-0466

Contact/Location: Nicole Hendrickson - MACPIC