




# OIL ANALYSIS REPORT

## Sample Rating Trend

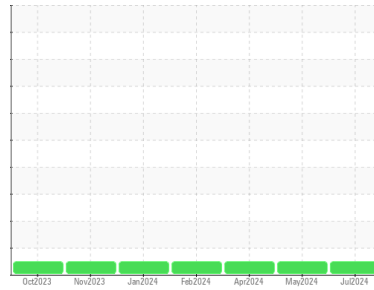

**NORMAL**



Machine Id

**2352**

Component

**Natural Gas Engine**

Fluid

**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0917413</b>	WC0937343	WC0917624
Sample Date	Client Info			<b>04 Jul 2024</b>	16 May 2024	03 Apr 2024
Machine Age	kms	Client Info		<b>68151</b>	56435	45780
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>50	<b>8</b>	7	7
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	1	1
Lead	ppm	ASTM D5185(m)	>30	<b>2</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>35	<b>1</b>	2	2
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>6</b>	7	8
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>53</b>	53	52
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>801</b>	786	753
Calcium	ppm	ASTM D5185(m)		<b>1227</b>	1221	1189
Phosphorus	ppm	ASTM D5185(m)		<b>602</b>	585	588
Zinc	ppm	ASTM D5185(m)		<b>834</b>	824	801
Sulfur	ppm	ASTM D5185(m)		<b>1870</b>	1856	1876
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>+100	<b>7</b>	6	5
Sodium	ppm	ASTM D5185(m)		<b>4</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.1</b>	12.1	12.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.1</b>	23.5	23.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.5</b>	20.8	20.4











# OIL ANALYSIS REPORT

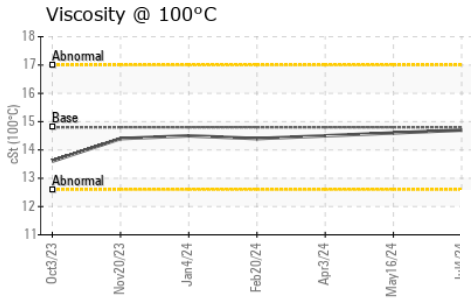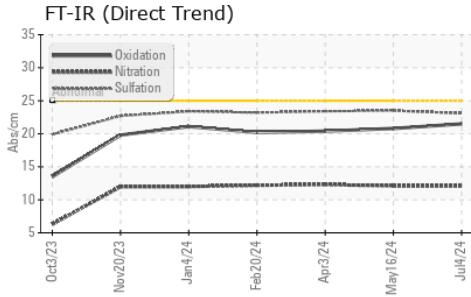

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.7	14.6

## GRAPHS

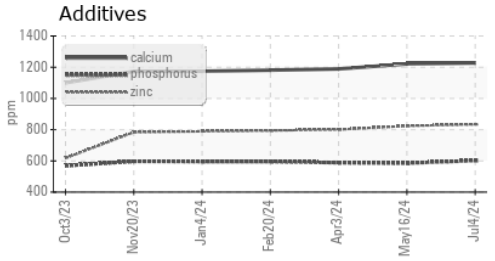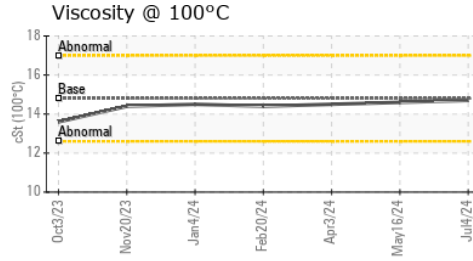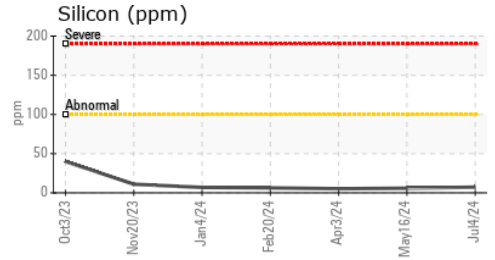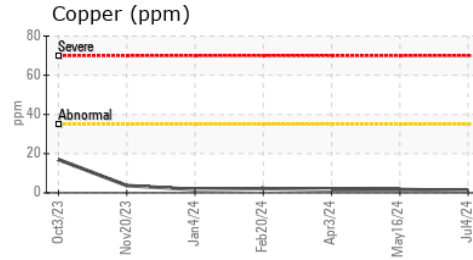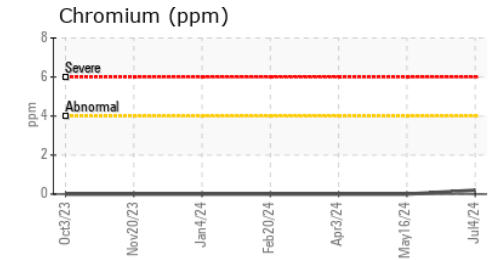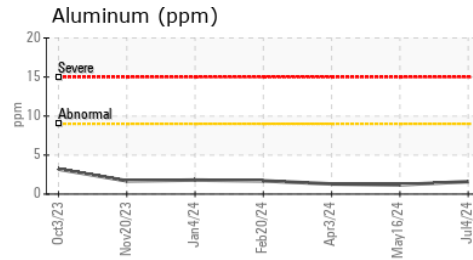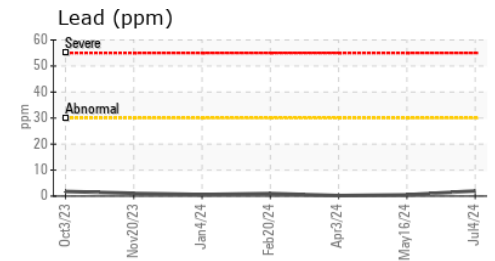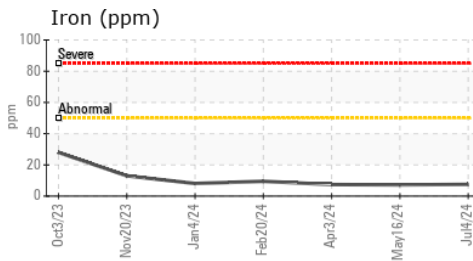

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0917413 **Received** : 11 Jul 2024  
**Lab Number** : 02647323 **Tested** : 11 Jul 2024  
**Unique Number** : 5812875 **Diagnosed** : 11 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Ron Skinner  
 ron.skinner@hamilton.ca  
 T:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

F: (905)679-4502