




PROBLEM SUMMARY

Sample Rating Trend

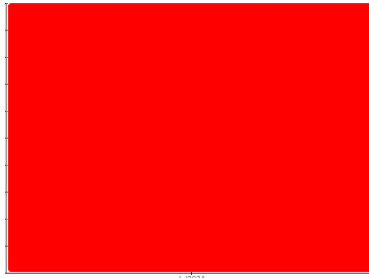


DEGRADATION



Area
Ideal CNC & Gundrilling - 888106
 Machine Id
RB063
 Component
Unknown Component
 Fluid
MILPRO 840 CF (--- GAL)

COMPONENT CONDITION SUMMARY

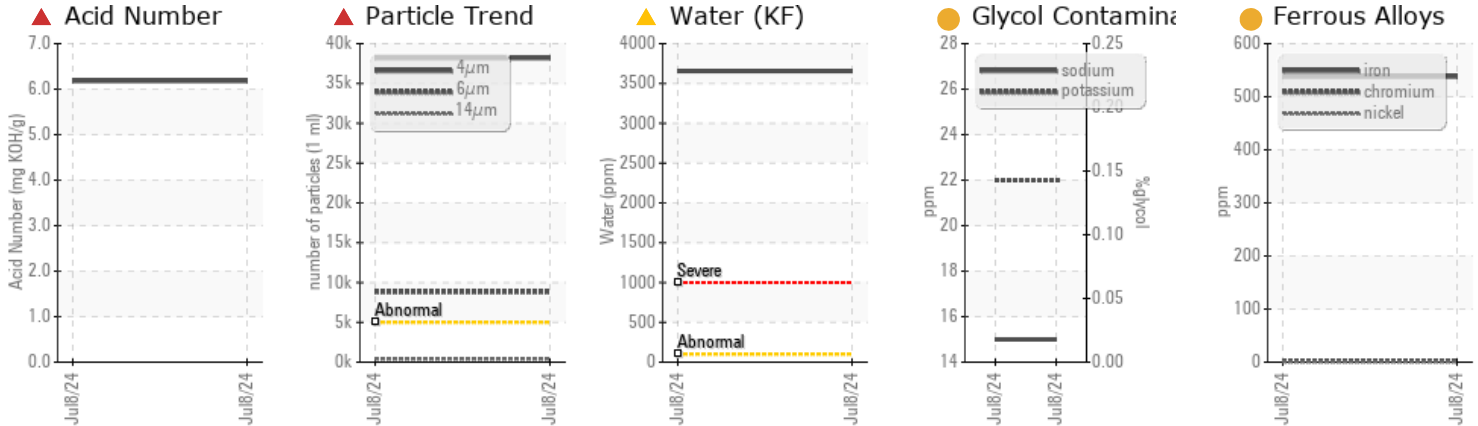

RECOMMENDATION

The sample submitted is 8 times dirtier than the ISO dirt count recommendation of 19/16/14.

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	---	---
Water	%	ASTM D6304*	▲ 0.365	---	---
ppm Water	ppm	ASTM D6304*	▲ 3656	---	---
Particles >4µm		ASTM D7647 >5000	▲ 38190	---	---
Particles >6µm		ASTM D7647 >640	▲ 8833	---	---
Particles >14µm		ASTM D7647 >160	▲ 391	---	---
Oil Cleanliness		ISO 4406 (c) >19/16/14	▲ 22/20/16	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	▲ 6.18	---	---
Emulsified Water	scalar	Visual*	▲ .2%	---	---

Customer Id: CHECOB
 Sample No.: E30002610
 Lab Number: 02647488
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Tatiana Sorkina +1 (800)263-3939
tsorkina@e360s.ca

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Area
Ideal CNC & Gundrilling - 888106
 Machine Id
RB063
 Component
Unknown Component
 Fluid
MILPRO 840 CF (--- GAL)

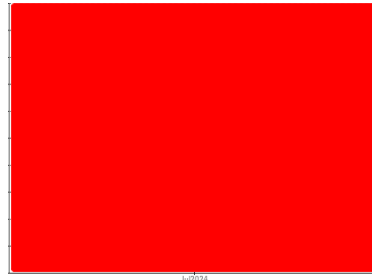

DIAGNOSIS

▲ Recommendation

The sample submitted is 8 times dirtier than the ISO dirt count recommendation of 19/16/14.

● Wear

Aluminum and iron ppm levels are noted.

▲ Contamination

Particles >6µm are severely high. Oil Cleanliness are severely high. Water contamination levels are abnormally high. ppm Water contamination levels are abnormally high. Particles >14µm are abnormally high. Particles >4µm are abnormally high. Potassium ppm levels are notably high.

▲ Fluid Condition

Acid Number (AN) is severely high. Sodium ppm levels are notably high.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Department	Client Info		Sales	---	---
Sample From	Client Info		Tote	---	---
Production Stage	Client Info		Initial	---	---
Sent to WC	Client Info		07/10/2024	---	---
Sample Number	Client Info		E30002610	---	---
Sample Date	Client Info		08 Jul 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	● 538	---	---
Chromium	ppm	ASTM D5185(m)	2	---	---
Nickel	ppm	ASTM D5185(m)	1	---	---
Titanium	ppm	ASTM D5185(m)	<1	---	---
Silver	ppm	ASTM D5185(m)	<1	---	---
Aluminum	ppm	ASTM D5185(m)	● 28	---	---
Lead	ppm	ASTM D5185(m)	<1	---	---
Copper	ppm	ASTM D5185(m)	<1	---	---
Tin	ppm	ASTM D5185(m)	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	<1	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---






ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	7	---	---
Barium	ppm	ASTM D5185(m)	1	---	---
Molybdenum	ppm	ASTM D5185(m)	<1	---	---
Manganese	ppm	ASTM D5185(m)	14	---	---
Magnesium	ppm	ASTM D5185(m)	17	---	---
Calcium	ppm	ASTM D5185(m)	87	---	---
Phosphorus	ppm	ASTM D5185(m)	1332	---	---
Zinc	ppm	ASTM D5185(m)	40	---	---
Sulfur	ppm	ASTM D5185(m)	23458	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	1	---	---
Sodium	ppm	ASTM D5185(m)	● 15	---	---
Potassium	ppm	ASTM D5185(m) >20	● 22	---	---
Water	%	ASTM D6304*	▲ 0.365	---	---
ppm Water	ppm	ASTM D6304*	▲ 3656	---	---

OIL ANALYSIS REPORT

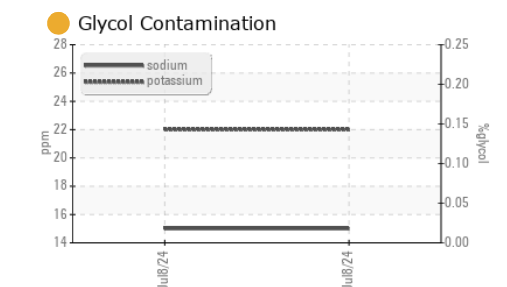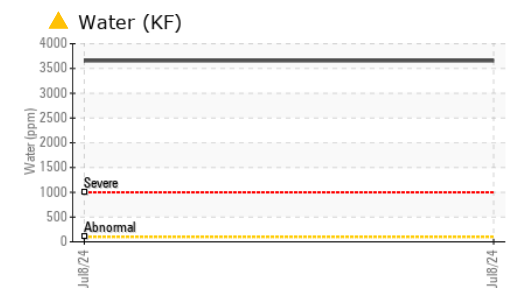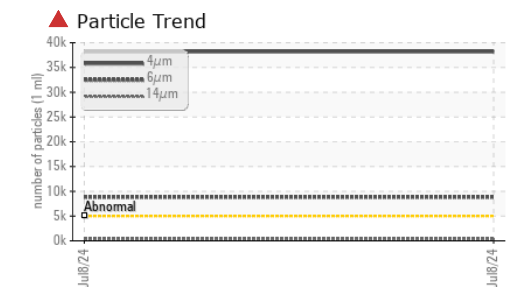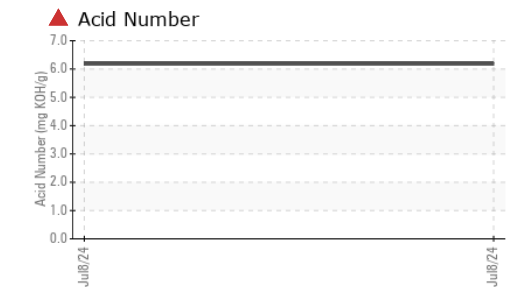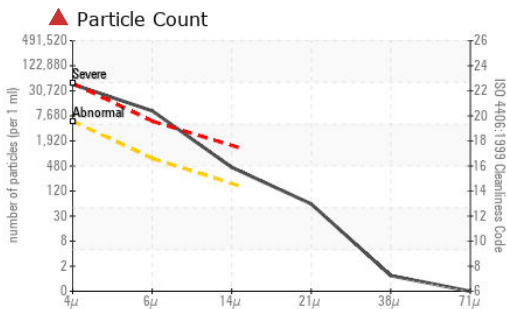

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 38190	---	---
Particles >6µm	ASTM D7647	>640	▲ 8833	---	---
Particles >14µm	ASTM D7647	>160	▲ 391	---	---
Particles >21µm	ASTM D7647	>40	52	---	---
Particles >38µm	ASTM D7647	>10	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	▲ 22/20/16	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	▲ 6.18	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	▲ .2%	---	---	
Free Water	scalar	Visual*	NEG	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	13.5	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	3.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	100	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30002610 **Received** : 11 Jul 2024
Lab Number : 02647488 **Tested** : 12 Jul 2024
Unique Number : 5813040 **Diagnosed** : 15 Jul 2024 - Tatiana Sorkina
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI)

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Tatiana Sorkina
 tsorkina@e360s.ca
 T: (800)263-3939
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.