




OIL ANALYSIS REPORT

Sample Rating Trend

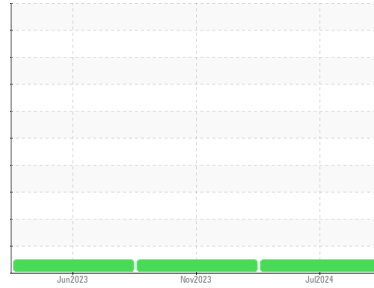

NORMAL



Area

[25344]

Machine Id

22-123

Component

Diesel Engine

Fluid

DISEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0941273	WC0876544	WC0818026
Sample Date	Client Info		01 Jul 2024	10 Nov 2023	26 Jun 2023
Machine Age	kms	Client Info	79042	69145	58726
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	11	14	15
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	3	6	2
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	1	1	<1
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	29	27	28
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	42	42	40
Manganese	ppm	ASTM D5185(m)		<1	0	<1
Magnesium	ppm	ASTM D5185(m)	450	493	516	515
Calcium	ppm	ASTM D5185(m)	3000	1696	1723	1703
Phosphorus	ppm	ASTM D5185(m)	1150	723	752	778
Zinc	ppm	ASTM D5185(m)	1350	868	880	886
Sulfur	ppm	ASTM D5185(m)	4250	2059	2048	2075
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	4	4
Sodium	ppm	ASTM D5185(m)	>158	1	1	2
Potassium	ppm	ASTM D5185(m)	>20	5	12	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	0.3	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	9.2	9.0	9.6
Sulfation	Abs./1mm	ASTM D7415*	>30	22.7	22.7	23.7



OIL ANALYSIS REPORT







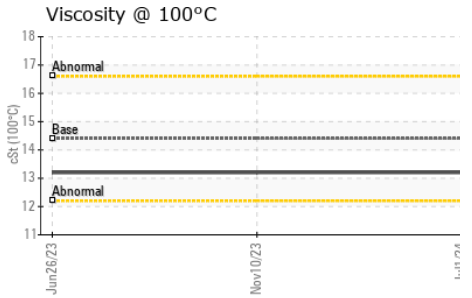
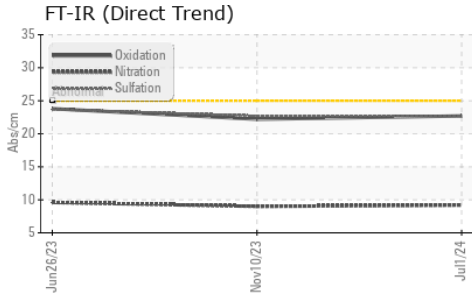


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	22.7	22.2	23.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.2	13.2	13.2

GRAPHS

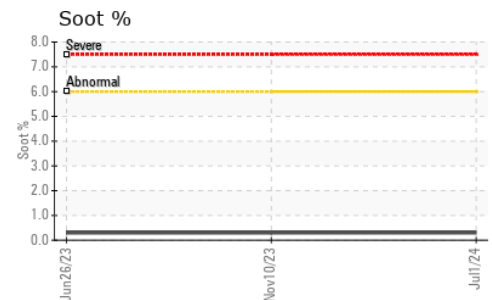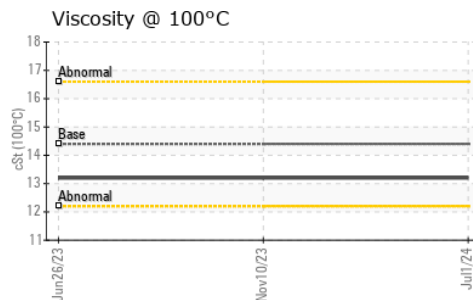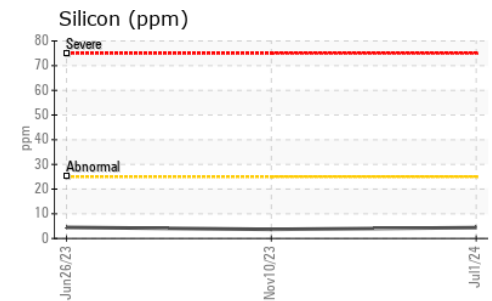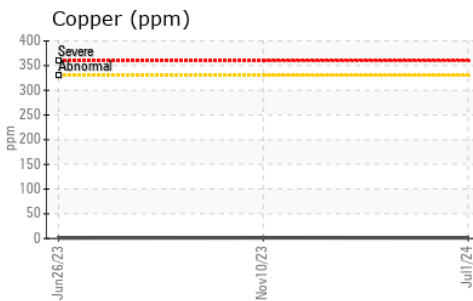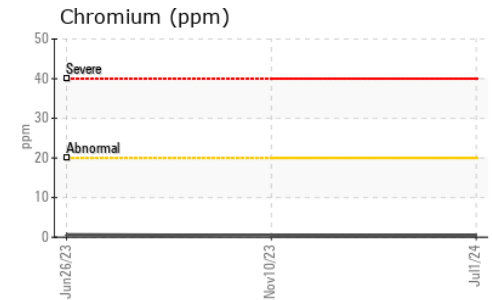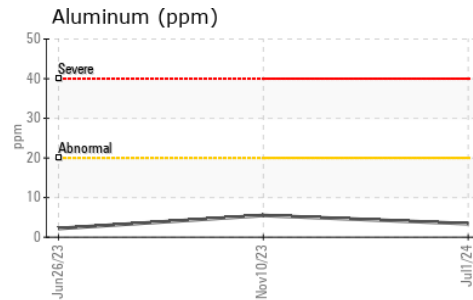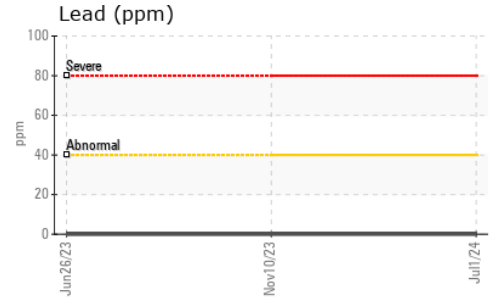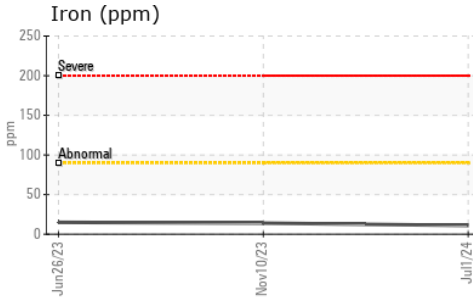

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0941273
Lab Number : 02647618
Unique Number : 5813170
Test Package : MOB 1
Received : 12 Jul 2024
Tested : 12 Jul 2024
Diagnosed : 12 Jul 2024 - Wes Davis

OX FLEET CARE
 466 HIGHWAY 52
 DUNDAS, ON
 CA L9H 5E2
 Contact: Jon Burgess
 jon.burgess@ox-equipment.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.