




# OIL ANALYSIS REPORT

Area  
**2**  
 Machine Id  
**Timm Machine A Barrel**  
 Component  
**Bearing**  
 Fluid  
**SHELL OMALA 68 (--- GAL)**

Sample Rating Trend

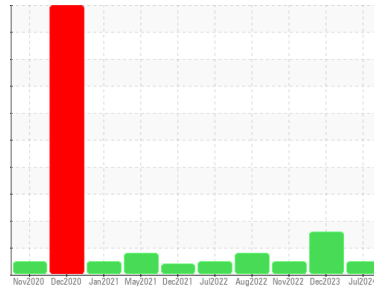

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**Wear**  
 All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

**Contaminants**  
 There is no indication of any contamination in the oil.

**Oil Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>CB0031940</b>	CB0031412	CB0031025
Sample Date	Client Info	<b>11 Jul 2024</b>	29 Dec 2023	17 Nov 2022
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	<b>0</b>	0	0
Iron	ppm ASTM D5185(m) >20	<b>38</b>	60	42
Chromium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm ASTM D5185(m)	<b>0</b>	0	0
Aluminum	ppm ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1
Lead	ppm ASTM D5185(m) >20	<b>0</b>	<1	0
Copper	ppm ASTM D5185(m) >20	<b>&lt;1</b>	<1	0
Tin	ppm ASTM D5185(m) >20	<b>0</b>	0	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	0	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Barium	ppm ASTM D5185(m)	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	0
Calcium	ppm ASTM D5185(m)	<b>2</b>	<1	<1
Phosphorus	ppm ASTM D5185(m)	<b>281</b>	297	332
Zinc	ppm ASTM D5185(m)	<b>6</b>	8	16
Sulfur	ppm ASTM D5185(m)	<b>7571</b>	7119	7561
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1




## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<b>1</b>	2	1
Sodium	ppm ASTM D5185(m)	<b>0</b>	0	<1
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	<1	<1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	<b>0.49</b>	0.55	0.47


# OIL ANALYSIS REPORT

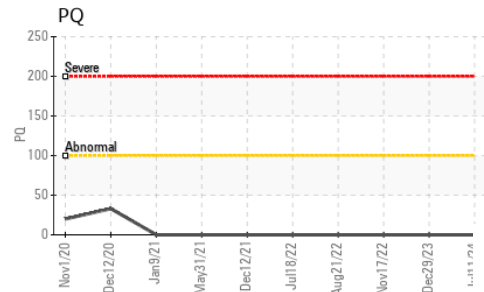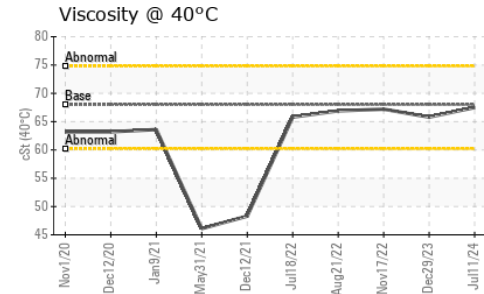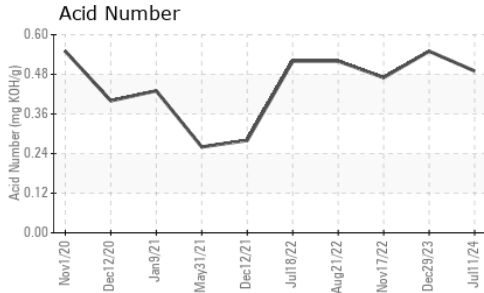






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D2729(m)	68.0	67.5	65.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

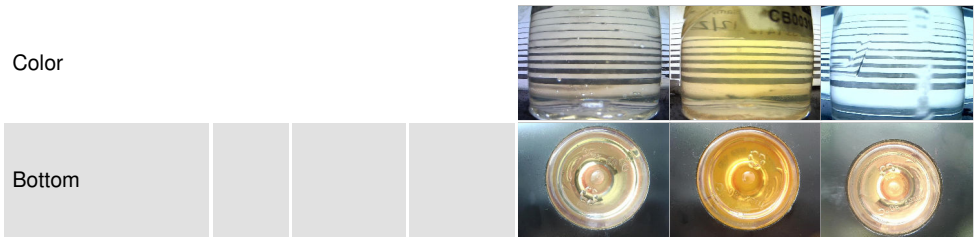

## GRAPHS

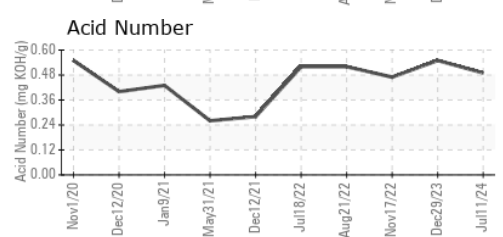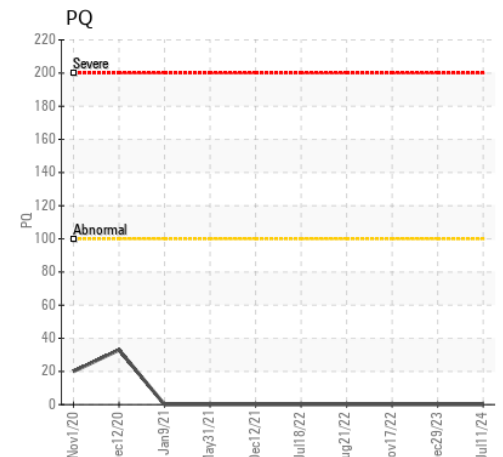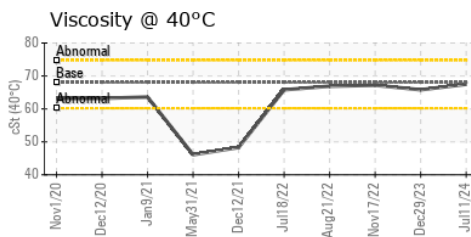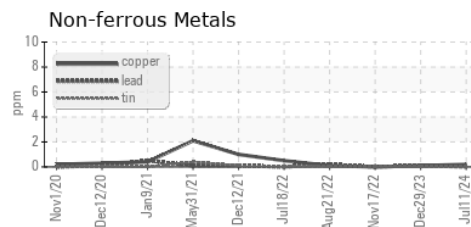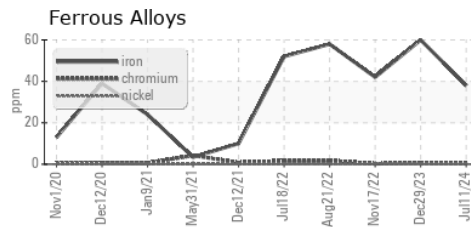



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CB0031940  
**Lab Number** : 02647634  
**Unique Number** : 5813186  
**Test Package** : IND 3

**TOYOTA MOTOR MANUFACTURING CANADA**  
 PLASTICS DEPARTMENT, 1717 DUNDAS ST  
 WOODSTOCK, ON  
 CA N4S 0A4  
 Contact: Jeff Lafleur  
 jeff.lafleur@toyota.com  
 T: (519)653-1111  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

# FERROGRAPHY REPORT

Area  
**2**  
Machine Id  
**Timm Machine A Barrel**  
Component  
**Bearing**  
Fluid  
**SHELL OMALA 68 (--- GAL)**

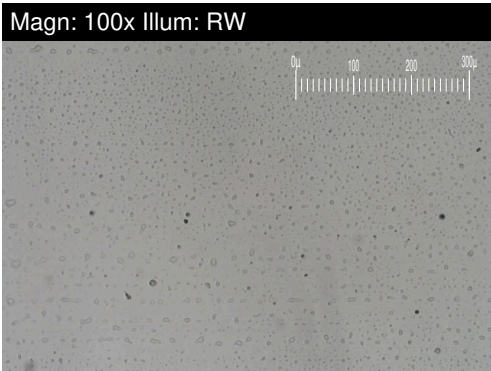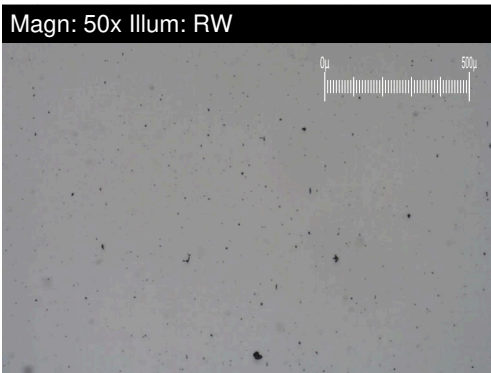


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>2.6</b>	4.0	13.4
Small Particles		DR-Ferr*		<b>2.1</b>	2.0	13.2
Total Particles		DR-Ferr*	>---	<b>4.7</b>	6	26.6
Large Particles Percentage	%	DR-Ferr*		<b>10.6</b>	33.3	0.8
Severity Index		DR-Ferr*		<b>1</b>	8	3

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				1
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*			2	
Other	Scale 0-10	ASTM D7684*		<b>2</b>		1

### WEAR

All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system.

DR Ferrography

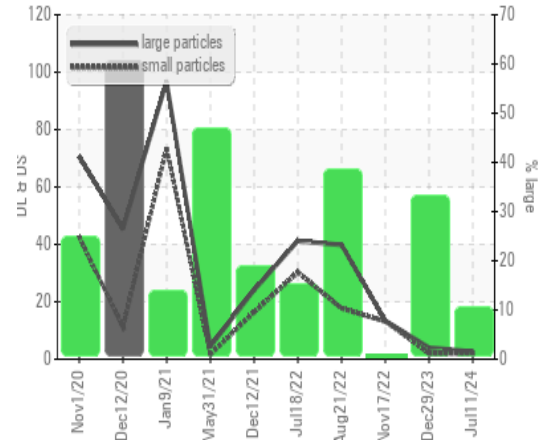

*This page left intentionally blank*