




OIL ANALYSIS REPORT

Sample Rating Trend

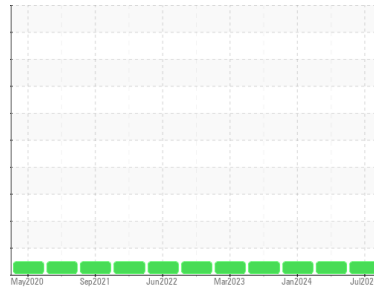

NORMAL



Machine Id
GMC EQ60078
 Component
Diesel Engine
 Fluid
VALVOLINE 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0911727	WC0911690	WC0887281
Sample Date	Client Info		08 Jul 2024	21 Mar 2024	25 Jan 2024
Machine Age	kms	Client Info	274878	251277	239626
Oil Age	kms	Client Info	10000	10000	10000
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	10	8	8
Chromium	ppm	ASTM D5185(m)	>20	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	<1	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	2	2
Lead	ppm	ASTM D5185(m)	>40	0	0	<1
Copper	ppm	ASTM D5185(m)	>330	1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	39	4	1	<1
Barium	ppm	ASTM D5185(m)	1	0	0	0
Molybdenum	ppm	ASTM D5185(m)	49	59	57	59
Manganese	ppm	ASTM D5185(m)	1	<1	0	0
Magnesium	ppm	ASTM D5185(m)	616	972	966	970
Calcium	ppm	ASTM D5185(m)	1554	1021	1016	1021
Phosphorus	ppm	ASTM D5185(m)	899	980	978	1016
Zinc	ppm	ASTM D5185(m)	1069	1194	1170	1173
Sulfur	ppm	ASTM D5185(m)	2624	2525	2456	2657
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	2	2	3
Sodium	ppm	ASTM D5185(m)		6	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.3	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	8.4	8.2	8.7
Sulfation	Abs./1mm	ASTM D7415*	>30	19.7	19.0	19.6



OIL ANALYSIS REPORT






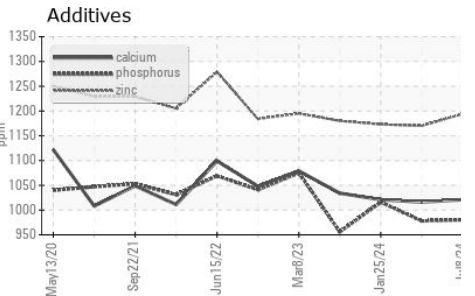
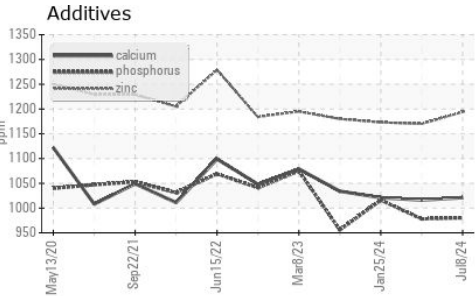
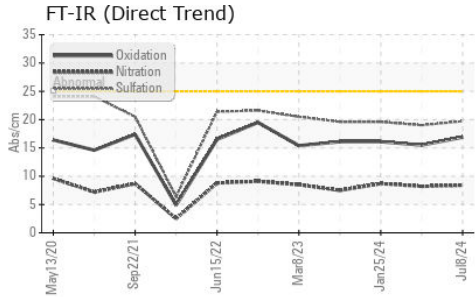


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	16.9	15.5	16.1

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	13.6	13.9	13.9	13.8

GRAPHS

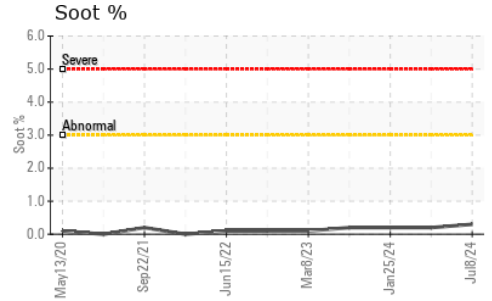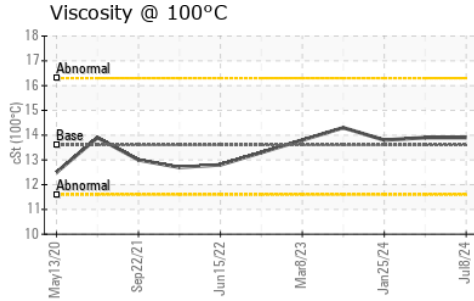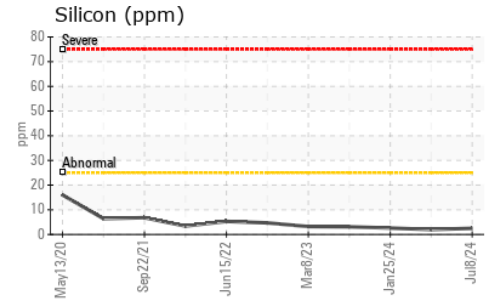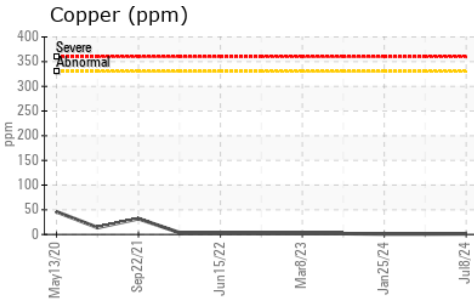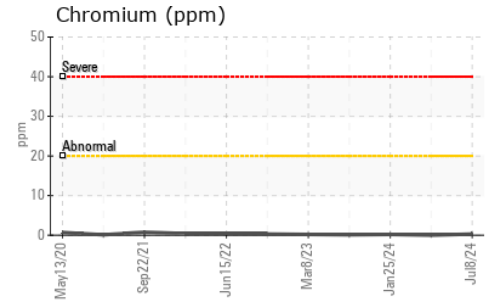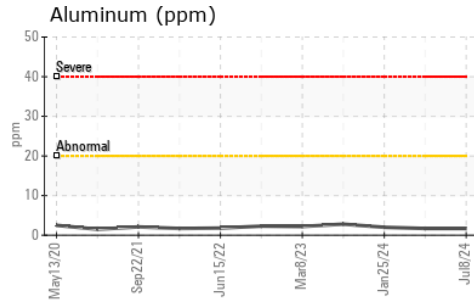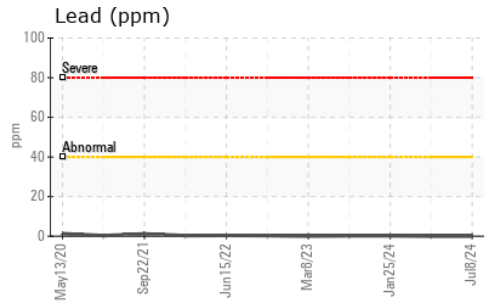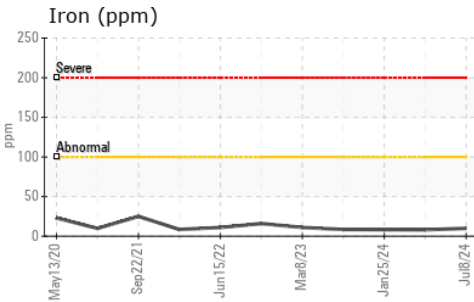

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0911727
Lab Number : 02647748
Unique Number : 5813300
Test Package : MOB 1

CITY OF PETERBOROUGH
 791 WEBBER AVENUE., MUNICIPAL OPERATIONS CENTRE
 PETERBOROUGH, ON
 CA K9J 8N3
 Contact: Frank Curran
 fcurran@peterborough.ca
 T: (705)742-7777
 F: (705)743-3223

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.