




OIL ANALYSIS REPORT

Sample Rating Trend

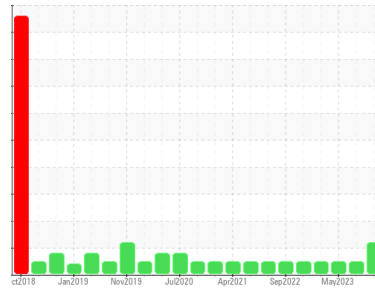

VISUAL METAL



Area

Power Generation

Machine Id

V837270 STANDBY POWER GENERATION 4160B PACKAGE

Component

Lube System

Fluid

MOBIL DTE OIL MEDIUM (113 LTR)

DIAGNOSIS

Recommendation

We advise that you check for visible metal particles in the oil. We recommend an early resample to monitor this condition.

Wear

Light concentration of visible metal present.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable. NOTE: An increase in the particle count is noted.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PP14001678	PP13932690	PP13869146
Sample Date	Client Info		08 Jun 2024	25 Nov 2023	30 May 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			MARGINAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<1	0	<1
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		<1	<1	<1
Aluminum	ppm	ASTM D5185(m)	>10	<1	0	<1
Lead	ppm	ASTM D5185(m)	>20	<1	1	1
Copper	ppm	ASTM D5185(m)	>20	42	43	37
Tin	ppm	ASTM D5185(m)	>10	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		0	<1	0
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	0	0
Calcium	ppm	ASTM D5185(m)		<1	<1	1
Phosphorus	ppm	ASTM D5185(m)		90	91	95
Zinc	ppm	ASTM D5185(m)		95	99	98
Sulfur	ppm	ASTM D5185(m)		1183	1309	1137
Lithium	ppm	ASTM D5185(m)		<1	<1	<1


CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	5	6	5
Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	3198	837	499
Particles >6µm	ASTM D7647	>1300	816	187	106
Particles >14µm	ASTM D7647	>160	75	9	9
Particles >21µm	ASTM D7647	>40	32	2	3
Particles >38µm	ASTM D7647	>10	8	0	0
Particles >71µm	ASTM D7647	>3	1	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	19/17/13	17/15/10	16/14/10

Particle Filter (Magn: 100 x)

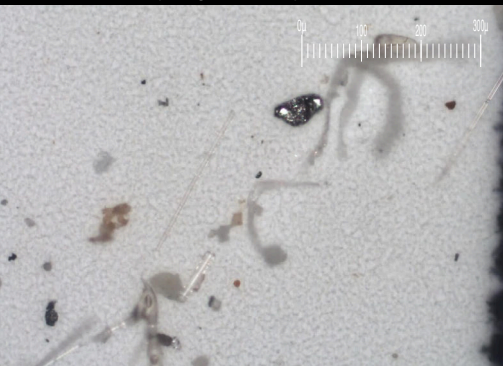



OIL ANALYSIS REPORT

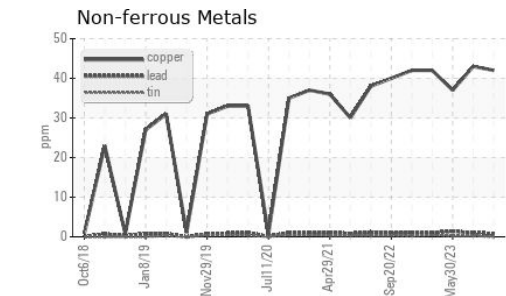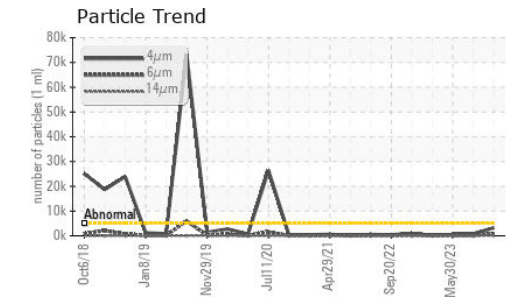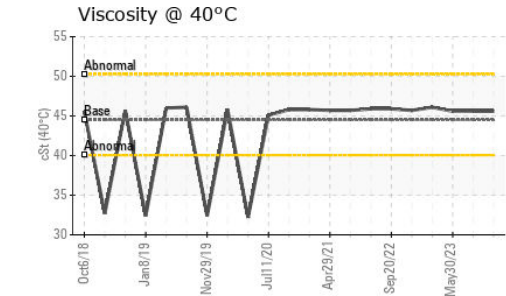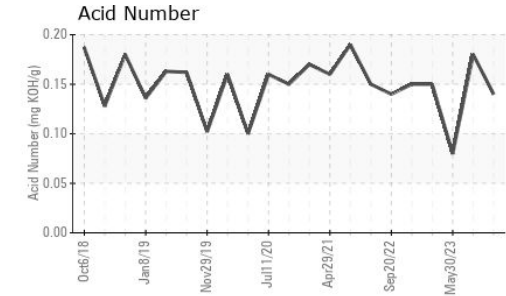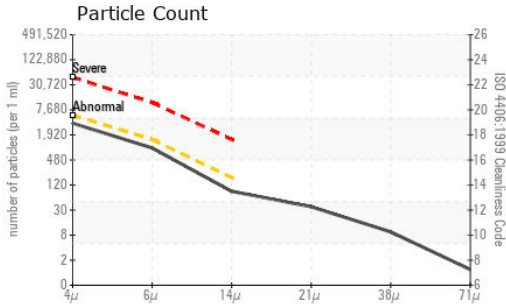

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP14001678
Lab Number : 02647839
Unique Number : 5813391
Test Package : MAR 2 (Additional Tests: Bottom, BottomAnalysis, FILTERPATCH, PrtFilter)

ExxonMobil Canada East Ltd.
 Hebron-Materials and Repair Coordin, Suite 1000, 100 New Gow
 St. John`s, NL
 CA A1C 6K3
 Contact: Liam Maher
 liam.m.maher@exxonmobil.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.14	0.18	0.08
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	▲ VLITE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	44.5	45.6	45.6	45.6

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						
PrtFilter					no image	no image