

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



170640
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Machine Id

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			J	ul2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
			mmasacc	PP		
Sample Number Sample Date		Client Info		14 Jul 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	1113	Client Info		N/A		
Sample Status		Oliciit iiilo		NORMAL		
CONTAMINATION	V	method	limit/base	current	history1	history2
Water	•	WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185(m)	>20	5		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)	>10	0		
Silver		ASTM D5185(m)		0		
	ppm	` '	. 10			
Aluminum	ppm	ASTM D5185(m)	>10	<1		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Codmium	nnm					
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES	ррш	method	limit/base	current	history1	history2
	ppm		limit/base			
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185(m)	limit/base	current	history1	history2
ADDITIVES Boron Barium	ppm ppm	method ASTM D5185(m) ASTM D5185(m)	limit/base	current 14 0	history1	history2
ADDITIVES Boron Barium Molybdenum	ppm ppm	method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	current 14 0	history1 	history2
ADDITIVES Boron Barium Molybdenum Manganese	ppm ppm ppm	method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	current 14 0 0 0	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	current 14 0 0 0 <	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm	method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	current 14 0 0 0 <	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	method ASTM D5185(m)	limit/base	current 14 0 0 0	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185(m)	limit/base	current 14 0 0 0	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m)	limit/base	current 14 0 0 0 <1 102 471 62 3284	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185(m)	limit/base	current 14 0 0 0 <1 102 471 62 3284 <1 current	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m)		current 14 0 0 0 <1 102 471 62 3284 <1 current 0	history1 history1	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m)	limit/base >15	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3	history1 history1	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m)	limit/base >15 >20	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3 2	history1 history1	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m) MASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base >15 >20 limit/base	current 14 0 0 0 -1 102 471 62 3284 -1 current 0 3 2 current	history1 history1 history1	history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m) MASTM D5185(m) ASTM D5185(m)	limit/base >15 >20 limit/base >5000	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3 2 current 1389	history1 history1 history1	history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m) METHOD METHOD ASTM D5185(m)	limit/base >15 >20 limit/base >5000 >1300	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3 2 current 1389 144	history1 history1 history1	history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m) METHOD ASTM D5185(m) ASTM D7647 ASTM D7647	limit/base >15 >20 limit/base >5000 >1300 >160	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3 2 current 1389 144 12	history1 history1 history1	history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m) METHOD ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >15 >20 limit/base >5000 >1300 >160 >40	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3 2 current 1389 144 12 5	history1 history1 history1	history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m) METHOD METHOD ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >15 >20 limit/base >5000 >1300 >160 >40 >10	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3 2 current 1389 144 12 5 1	history1 history1 history1	history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	Method ASTM D5185(m) METHOD ASTM D5185(m) ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	limit/base >15 >20 limit/base >5000 >1300 >160 >40 >10	current 14 0 0 0 <1 102 471 62 3284 <1 current 0 3 2 current 1389 144 12 5	history1 history1 history1	history2 history2 history2

Contact/Location: Liam Maher - EXXSTJ



OIL ANALYSIS REPORT

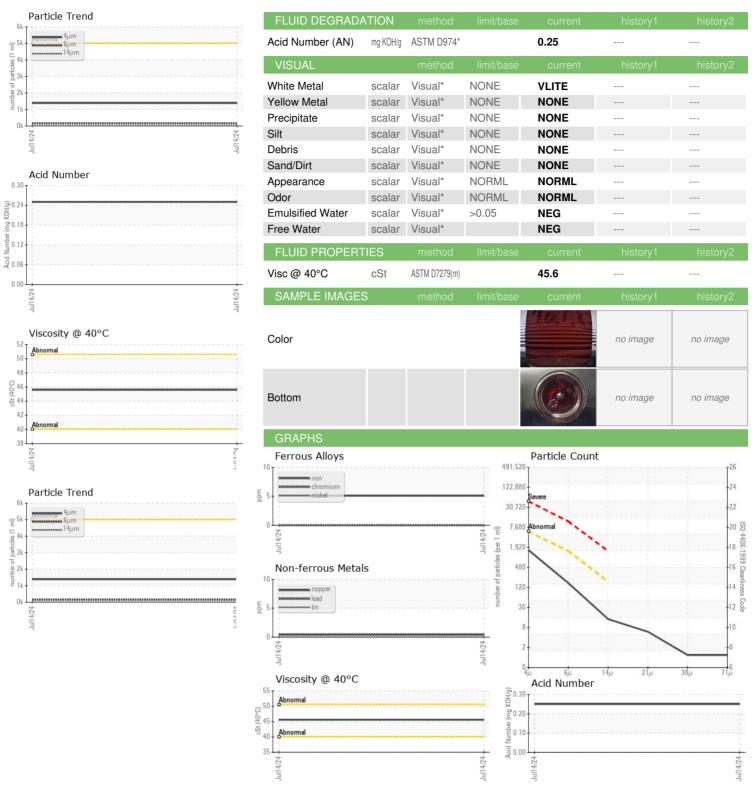



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number

: PP

: 02647845 Unique Number : 5813397 Test Package : MAR 2 (Additional Tests: Bottom)

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received : 15 Jul 2024 **Tested** : 16 Jul 2024

Diagnosed : 16 Jul 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

ExxonMobil Canada East Ltd.

Hebron-Materials and Repair Coordin, Suite 1000, 100 New Gow St. John's, NL

CA A1C 6K3 Contact: Liam Maher liam.m.maher@exxonmobil.com

T: (709)273-3729