




# OIL ANALYSIS REPORT

Sample Rating Trend

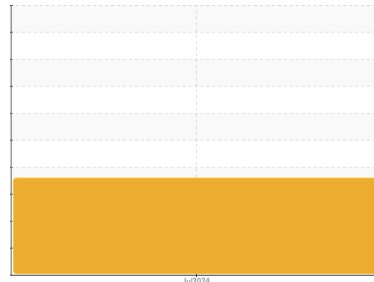

FUEL



Machine Id  
**MACK 1710338**  
 Component  
**Diesel Engine**  
 Fluid  
**SAE 10W30 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the fuel injection system. The oil is near the end of its useful service life, recommend schedule an oil change. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### ▲ Fluid Condition

Visc @ 100°C is severely low. Sulfur ppm levels are abnormally low. Calcium ppm levels are abnormally low. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0908221</b>	---	---
Sample Date	Client Info		<b>15 Jul 2024</b>	---	---
Machine Age	kms	Client Info	<b>159868</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>SEVERE</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>120	<b>4</b>	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	---
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	---
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	---
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>1</b>	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---
Molybdenum	ppm	ASTM D5185(m)		<b>30</b>	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---
Magnesium	ppm	ASTM D5185(m)		<b>467</b>	---
Calcium	ppm	ASTM D5185(m)		<b>▲ 511</b>	---
Phosphorus	ppm	ASTM D5185(m)		<b>525</b>	---
Zinc	ppm	ASTM D5185(m)		<b>574</b>	---
Sulfur	ppm	ASTM D5185(m)		<b>▲ 1276</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>7</b>	---
Sodium	ppm	ASTM D5185(m)	>228	<b>2</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---
Fuel	%	ASTM D7593*	>3.0	<b>▲ 57.2</b>	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>4	<b>0</b>	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.1</b>	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>14.6</b>	---



# OIL ANALYSIS REPORT

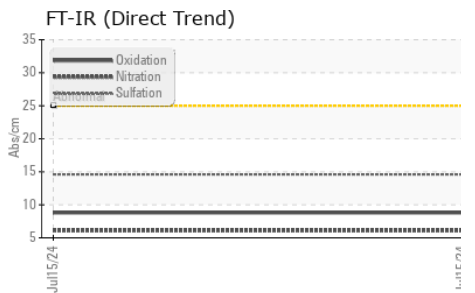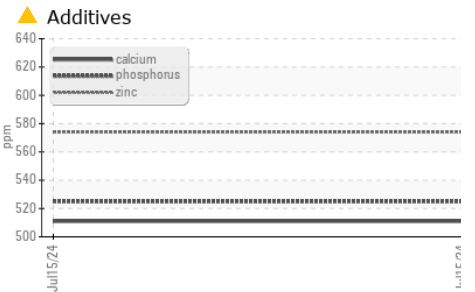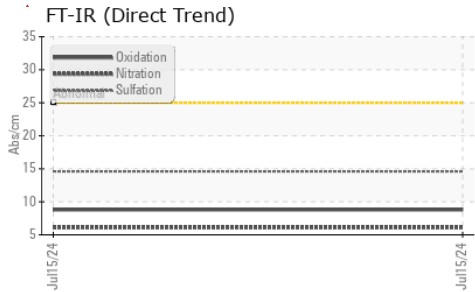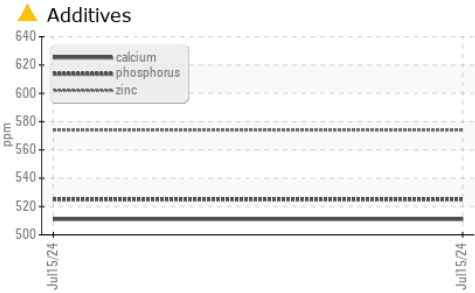


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>8.8</b>	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	11.0	<b>▲ 3.3</b>	---	---

### GRAPHS

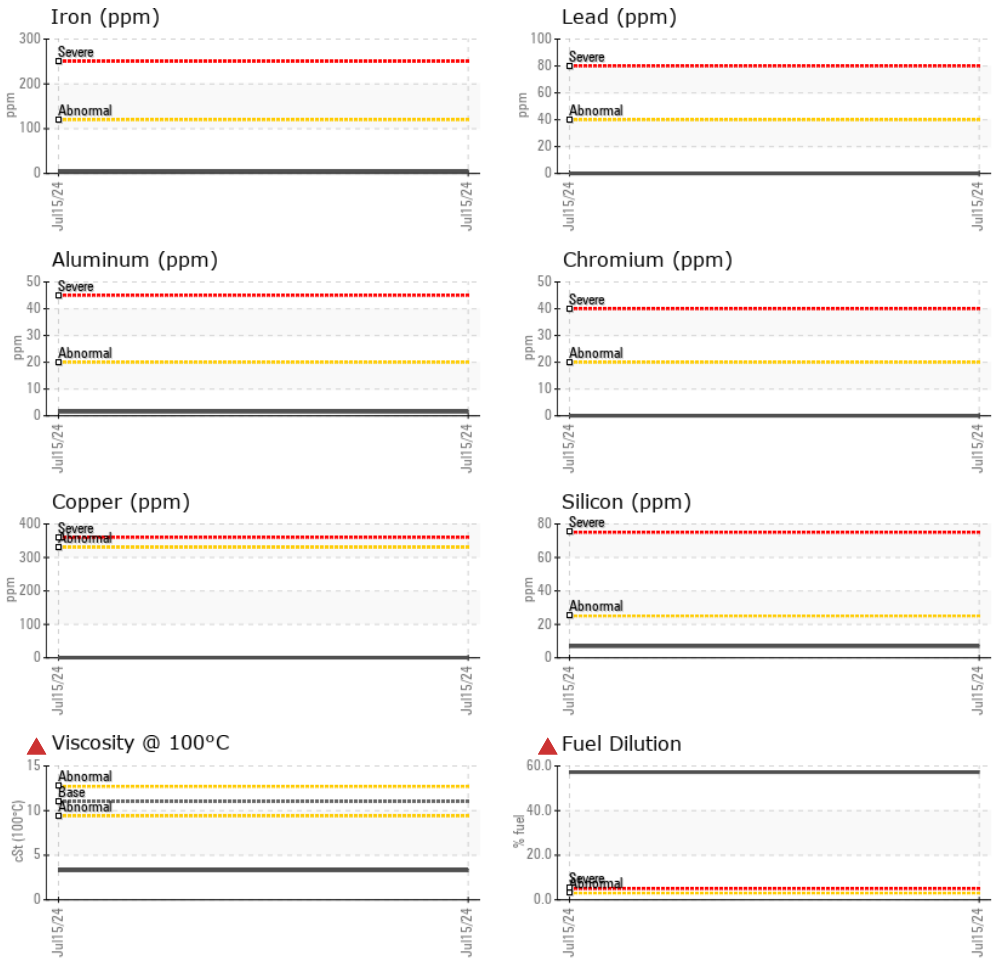

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0908221      **Received** : 16 Jul 2024  
**Lab Number** : **02648010**      **Tested** : 17 Jul 2024  
**Unique Number** : 5813562      **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel, Visual )

**SURGENOR TRUCK**  
 1571 LIVERPOOL COURT  
 OTTAWA, ON  
 CA K1B 4L1  
 Contact: Clinton Stevens  
 clinton.stevens@surgenor.com  
 T: (613)745-0024  
 F: (613)745-8690

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.