




PROBLEM SUMMARY

Area
(C-GSUR)
 Machine Id
[C-GSUR] DEHAVILLAND DASH8-102 PCE-120217
 Component
Right Jet Turbine
 Fluid
EASTMAN TURBO OIL 2380 (21 LTR)

Sample Rating Trend

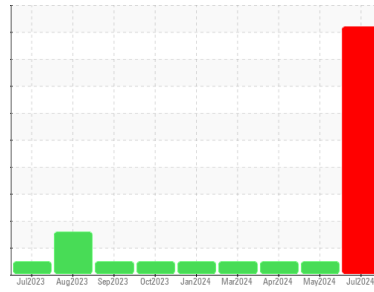

WEAR PARTICLES



COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status	Scale	ASTM	SEVERE	NORMAL	NORMAL
Ferrous Sliding	Scale 0-10	ASTM D7684*	▲ 1		
Ferrous Cutting	Scale 0-10	ASTM D7684*	▲ 1		

Customer Id: TRADIE
 Sample No.: WC0815291
 Lab Number: 02648103
 Test Package: AVI 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

NORMAL



29 May 2024 Diag: Kevin Marson

Resample at the next service interval to monitor. All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system. The water content is negligible. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



NORMAL



22 Apr 2024 Diag: Kevin Marson

Resample at the next service interval to monitor. All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system. The water content is negligible. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



NORMAL



10 Mar 2024 Diag: Kevin Marson

Resample at the next service interval to monitor. All component wear rates are normal. The ferrography results are normal indicating no abnormal wear in the system. The water content is negligible. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

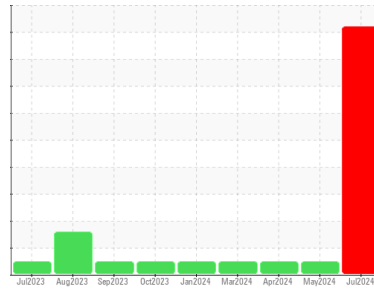

WEAR PARTICLES



Area
(C-GSUR)
 Machine Id
[C-GSUR] DEHAVILLAND DASH8-102 PCE-120217
 Component
Right Jet Turbine
 Fluid
EASTMAN TURBO OIL 2380 (21 LTR)

DIAGNOSIS

▲ Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

▲ Wear

Wear particle analysis indicates that the ferrous cutting particles are severe. Wear particle analysis indicates that the ferrous sliding particles are abnormal. Cutting wear particles are caused by either hard protuberances (mis-aligned components, etc.), or abrasives entering the system and embedding themselves in softer materials (sand, etc.), and gouging out mating surfaces.

Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0815291	WC0815297	WC0815300
Sample Date	Client Info		05 Jul 2024	29 May 2024	22 Apr 2024
TSN	hrs	Client Info	29800	29706	29606
TSO	hrs	Client Info	7608	7514	7415
Oil Age	hrs	Client Info	7608	7514	7415
Oil Changed		Client Info	Not Chngd	N/A	Not Chngd
Sample Status			SEVERE	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >8	<1	0	0
Chromium	ppm	ASTM D5185(m) >2	0	0	0
Nickel	ppm	ASTM D5185(m) >2	<1	0	0
Titanium	ppm	ASTM D5185(m) >2	0	0	0
Silver	ppm	ASTM D5185(m) >2	0	0	0
Aluminum	ppm	ASTM D5185(m) >2	0	0	0
Lead	ppm	ASTM D5185(m) >3	0	0	0
Copper	ppm	ASTM D5185(m) >3	<1	0	0
Tin	ppm	ASTM D5185(m) >2	0	0	0
Antimony	ppm	ASTM D5185(m)	<1	<1	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	4	<1	<1
Barium	ppm	ASTM D5185(m) 0	0	0	0
Molybdenum	ppm	ASTM D5185(m) 0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	0
Magnesium	ppm	ASTM D5185(m) 0	0	<1	<1
Calcium	ppm	ASTM D5185(m) 0	<1	0	0
Phosphorus	ppm	ASTM D5185(m) 2500	2481	2496	2584
Zinc	ppm	ASTM D5185(m) 0	<1	<1	<1
Sulfur	ppm	ASTM D5185(m) 0	4	5	0
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >8	0	0	0
Sodium	ppm	ASTM D5185(m)	<1	0	0
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1
Water	%	ASTM D6304* >0.08	0.080	0.047	0.017
ppm Water	ppm	ASTM D6304* >800	808	471	171

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.43	0.21	0.23	0.24



OIL ANALYSIS REPORT

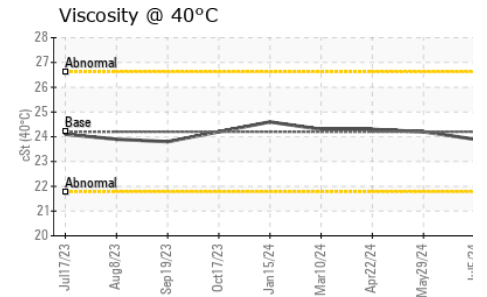
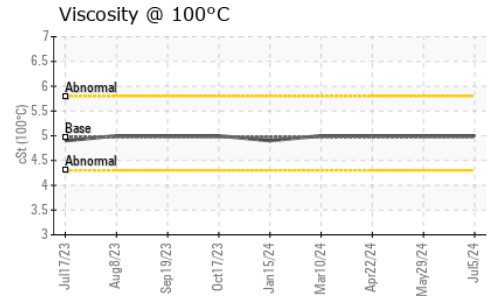
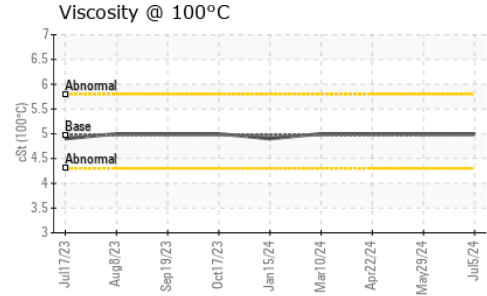
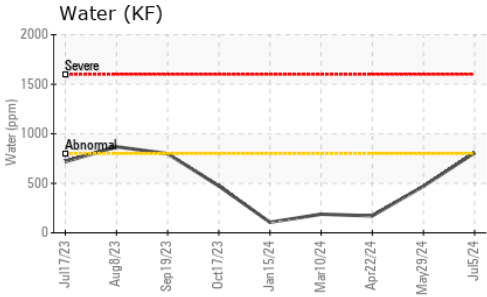


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.08	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	24.2	23.9	24.2
Visc @ 100°C	cSt	ASTM D7279(m)	4.97	5.0	5.0
Viscosity Index (VI)	Scale	ASTM D2270*	134	140	136

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

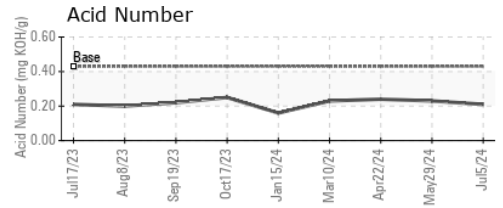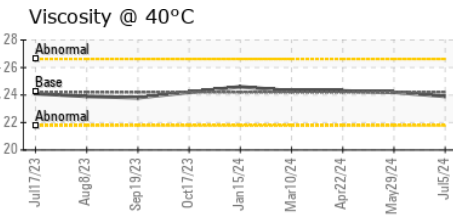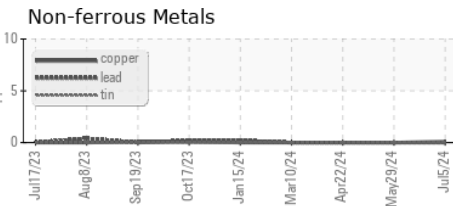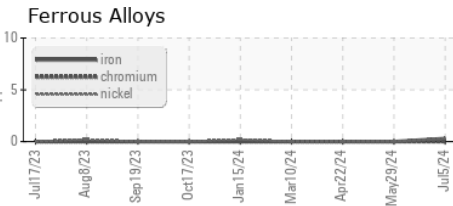




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0815291 **Received** : 16 Jul 2024
Lab Number : **02648103** **Tested** : 18 Jul 2024
Unique Number : 5813655 **Diagnosed** : 18 Jul 2024 - Kevin Marson
Test Package : AVI 3

TRANSPORT CANADA
 1945 CHAMPLAIN STREET
 DIEPPE, NB
 CA E1A 7P5
 Contact: Marc Justin Leblanc
 marcjustin.leblanc@tc.gc.ca
 T: (506)851-6945
 F: (506)851-2996

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Area
(C-GSUR)
 Machine Id
[C-GSUR] DEHAVILLAND DASH8-102 PCE-120217
 Component
Right Jet Turbine
 Fluid
EASTMAN TURBO OIL 2380 (21 LTR)

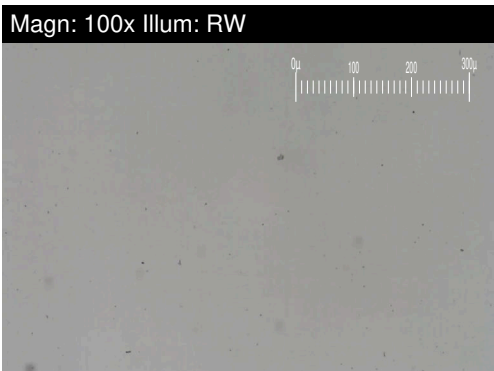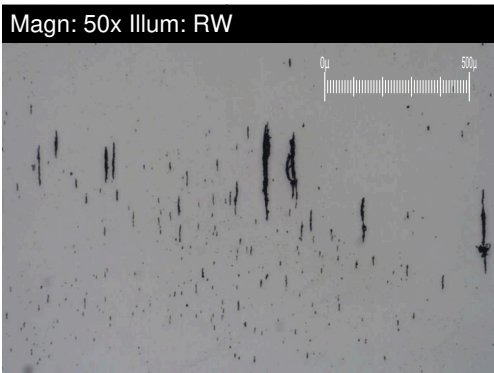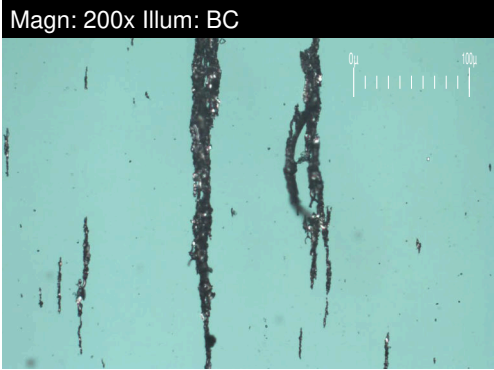


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		2.3	1.9	1.0
Small Particles		DR-Ferr*		1.7	2.1	1.2
Total Particles		DR-Ferr*	>---	4	4	2.2
Large Particles Percentage	%	DR-Ferr*		15	0	0
Severity Index		DR-Ferr*		1	0	0

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		3	1	1
Ferrous Sliding	Scale 0-10	ASTM D7684*		▲ 1		
Ferrous Cutting	Scale 0-10	ASTM D7684*		▲ 1		
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*		1		
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	1

WEAR

Wear particle analysis indicates that the ferrous cutting particles are severe. Wear particle analysis indicates that the ferrous sliding particles are abnormal. Cutting wear particles are caused by either hard protuberances (mis-aligned components, etc.), or abrasives entering the system and embedding themselves in softer materials (sand, etc.), and gouging out mating surfaces.

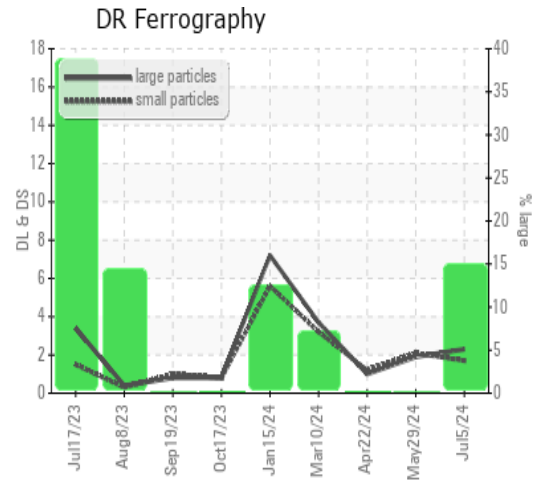

This page left intentionally blank