

OIL ANALYSIS REPORT

Area
Chem-Ecol A2407065

Hydraulic System

CHEM-ECOL PUREPROTECT 46 AW (--- GA

Sample Rating Trend

NORMAL


Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

AL)				Jul2024		
OANABI E INIEOBA	4ATION		11 1.0			
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		3151-A		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		07/12/2024		
Sample Number		Client Info		E30002642		
Sample Date		Client Info		12 Jul 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<1		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		149		
Calcium	ppm	ASTM D5185(m)		112		
Phosphorus	ppm	ASTM D5185(m)		421		
Zinc	ppm	ASTM D5185(m)		565		
Sulfur	ppm	ASTM D5185(m)		1091		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*	>0.05	0.004		
ppm Water	ppm	ASTM D6304*	>500	47		



OIL ANALYSIS REPORT

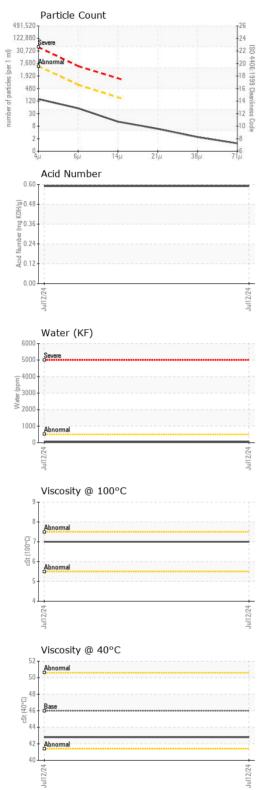

ESS	method				history2
	ASTM D7647	>5000	132		
	ASTM D7647	>640	48		
	ASTM D7647	>160	11		
	ASTM D7647	>40	5		
	ASTM D7647	>10	2		
	ASTM D7647	>3	1		
	ISO 4406 (c)	>19/16/14	14/13/11		
TION	method	limit/base	current	history1	history2
mg KOH/g	ASTM D974*		0.59		
	method	limit/base	current	history1	history2
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NONE	NONE		
scalar	Visual*	NORML	NORML		
scalar	Visual*	NORML	NORML		
scalar	Visual*	>0.05	NEG		
scalar	Visual*		NEG		
ES	method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	46	42.8		
cSt	ASTM D7279(m)		7.0		
Scale	ASTM D2270*		122		
	method	limit/base	current	history1	history2
				no image	no image
				no image	no image
	scalar sc	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c) TION method mg KOH/g ASTM D974* method scalar Visual* scalar ASTM D7279(m) cSt ASTM D7279(m) Scale ASTM D2270*	ASTM D7647 >640	ASTM D7647 >640	ASTM D7647 >640



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No.

: E30002642 Lab Number : 02648107 Unique Number : 5813659

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Received : 16 Jul 2024 **Tested** : 18 Jul 2024 Diagnosed : 19 Jul 2024 - Tatiana Sorkina

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950