


OIL ANALYSIS REPORT

Highbury Canco - 888099 **RB072**

Component Hydraulic System

PETRO CANADA HYDREX AW 68 (--- GAL

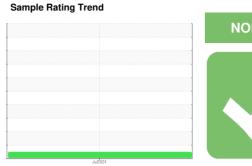




Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

Jul/2024								
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2		
Department		Client Info		Sales				
Sample From		Client Info		Tote				
Production Stage		Client Info		Virgin				
Sent to WC		Client Info		07/15/2024				
Sample Number		Client Info		E30002650				
Sample Date		Client Info		10 Jul 2024				
/lachine Age	hrs	Client Info		0				
Dil Age	hrs	Client Info		0				
Oil Changed		Client Info		N/A				
Sample Status				NORMAL				
WEAR METALS		method	limit/base	current	history1	history2		
ron	ppm	ASTM D5185(m)	>20	0				
Chromium	ppm	ASTM D5185(m)	>20	0				
Nickel	ppm	ASTM D5185(m)	>20	<1				
Titanium	ppm	ASTM D5185(m)		0				
Silver	ppm	ASTM D5185(m)		0				
Muminum	ppm	ASTM D5185(m)	>20	0				
.ead	ppm	ASTM D5185(m)	>20	0				
Copper	ppm	ASTM D5185(m)	>20	<1				
- īn	ppm	ASTM D5185(m)	>20	0				
Antimony	ppm	ASTM D5185(m)		0				
/anadium	ppm	ASTM D5185(m)		0				
Beryllium	ppm	ASTM D5185(m)		0				
Cadmium	ppm	ASTM D5185(m)		0				
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185(m)	0	1				
Barium	ppm	ASTM D5185(m)	0	0				
Nolybdenum	ppm	ASTM D5185(m)	0	0				
Manganese	ppm	ASTM D5185(m)	0	0				
Magnesium	ppm	ASTM D5185(m)	0	<1				
Calcium	ppm	ASTM D5185(m)	50	77				
Phosphorus	ppm	ASTM D5185(m)	330	311				
Zinc	ppm	ASTM D5185(m)	430	428				
Sulfur	ppm	ASTM D5185(m)	760	740				
_ithium	ppm	ASTM D5185(m)		<1				
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185(m)	>15	0				
Silicon	ppm	ASTM D5185(m) ASTM D5185(m)	>15	0				
Silicon Sodium		ASTM D5185(m) ASTM D5185(m)	>15 >20					
Silicon Sodium Potassium Nater	ppm	ASTM D5185(m)		0				



OIL ANALYSIS REPORT

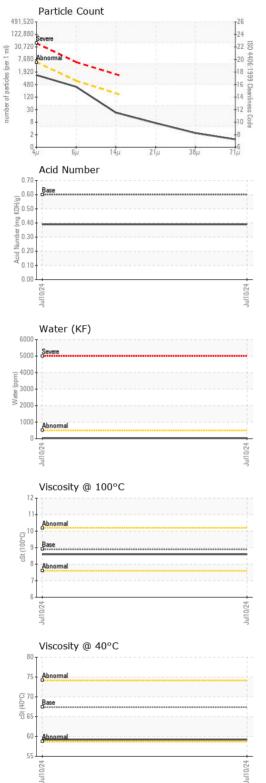

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1210		
Particles >6µm		ASTM D7647	>640	330		
Particles >14µm		ASTM D7647	>160	19		
Particles >21µm		ASTM D7647	>40	6		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	17/16/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.60	0.39		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	67.4	59.2		
Visc @ 100°C	cSt	ASTM D7279(m)	8.9	8.6		
Viscosity Index (VI)	Scale	ASTM D2270*	105	118		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory

Sample No. Lab Number : 02648149 Unique Number : 5813701

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : E30002650

Received : 16 Jul 2024 **Tested**

: 17 Jul 2024 : 18 Jul 2024 - Tatiana Sorkina

Diagnosed

Test Package : IND 2 (Additional Tests: KF, KV100, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950