




OIL ANALYSIS REPORT

Sample Rating Trend

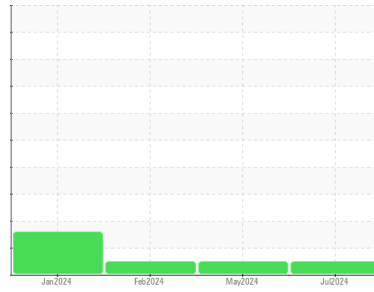

NORMAL



Machine Id

2277

Component

Natural Gas Engine

Fluid

VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0917487 | WC0937282 | WC0877947 |
| Sample Date | Client Info | | 15 Jul 2024 | 30 May 2024 | 28 Feb 2024 |
| Machine Age | kms | Client Info | 33178 | 23778 | 12646 |
| Oil Age | kms | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185(m) | >50 | 8 | 12 | 13 |
| Chromium | ppm | ASTM D5185(m) | >4 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185(m) | >2 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >9 | 1 | 1 | 2 |
| Lead | ppm | ASTM D5185(m) | >30 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185(m) | >35 | 1 | 3 | 3 |
| Tin | ppm | ASTM D5185(m) | >4 | <1 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|---------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | | 11 | 12 | 19 |
| Barium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | | 54 | 57 | 53 |
| Manganese | ppm | ASTM D5185(m) | | <1 | <1 | 1 |
| Magnesium | ppm | ASTM D5185(m) | | 822 | 788 | 802 |
| Calcium | ppm | ASTM D5185(m) | | 1297 | 1248 | 1224 |
| Phosphorus | ppm | ASTM D5185(m) | | 652 | 663 | 696 |
| Zinc | ppm | ASTM D5185(m) | | 898 | 861 | 842 |
| Sulfur | ppm | ASTM D5185(m) | | 1971 | 1929 | 2051 |
| Lithium | ppm | ASTM D5185(m) | | <1 | <1 | <1 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|---------------|---------|--------------|----------|----|
| Silicon | ppm | ASTM D5185(m) | >+100 | 4 | 6 | 10 |
| Sodium | ppm | ASTM D5185(m) | | 3 | 3 | 2 |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | <1 | <1 |

INFRA-RED



| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | ASTM D7844* | | 0 | 0 | 0 |
| Nitration | Abs/cm | ASTM D7624* | >20 | 11.6 | 12.3 | 10.8 |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 21.4 | 22.8 | 21.2 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 19.4 | 20.1 | 18.5 |











OIL ANALYSIS REPORT

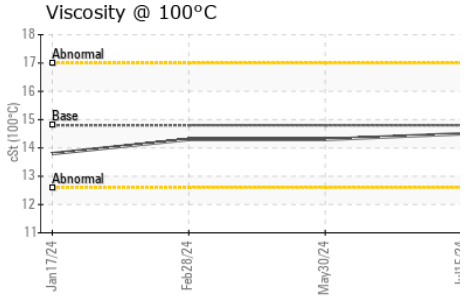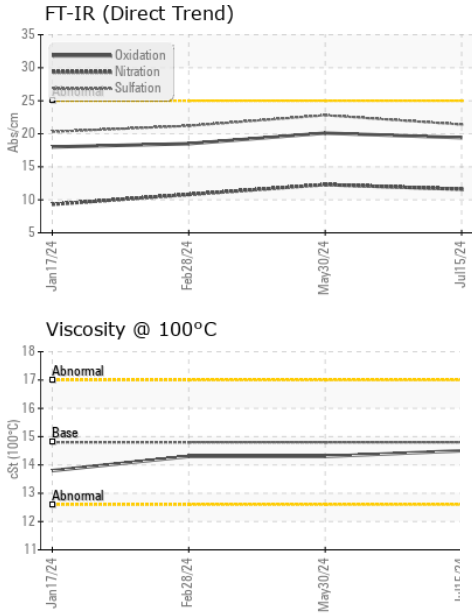

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D7279(m) | 14.8 | 14.5 | 14.3 |

GRAPHS

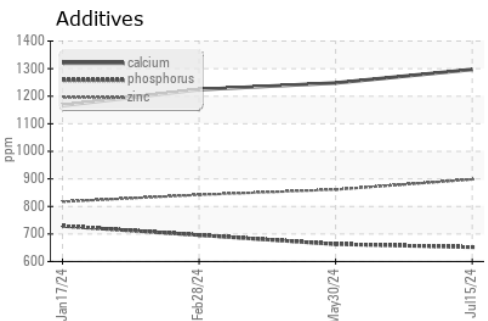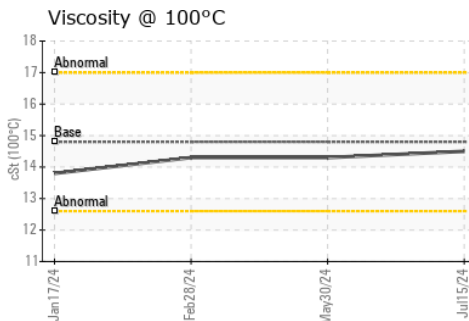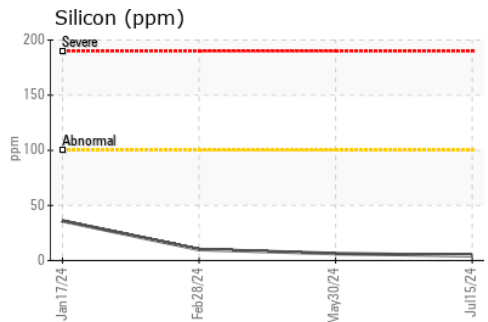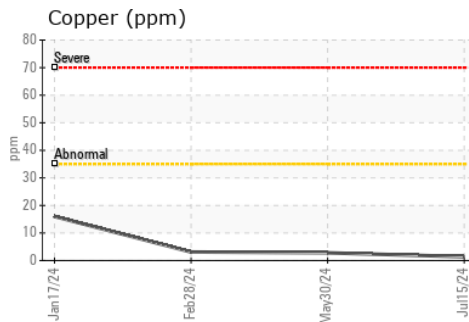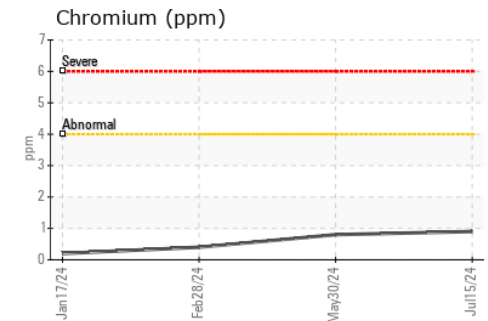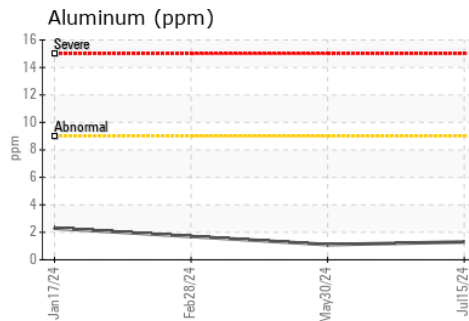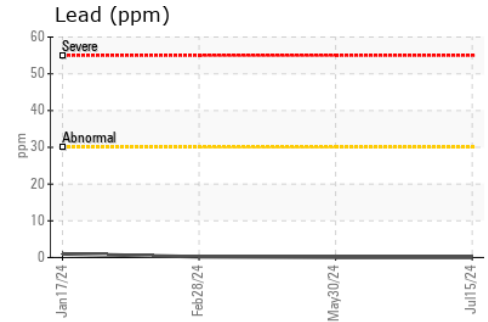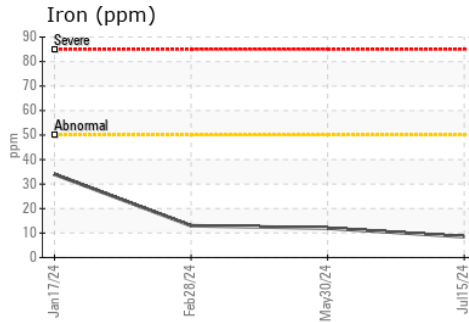

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0917487
Lab Number : 02648927
Unique Number : 5814479
Test Package : MOB 1
Received : 19 Jul 2024
Tested : 19 Jul 2024
Diagnosed : 19 Jul 2024 - Wes Davis

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Jeff Parr
 jeff.parr@hamilton.ca
 T: (905)546-2424
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.