




# OIL ANALYSIS REPORT

## Sample Rating Trend

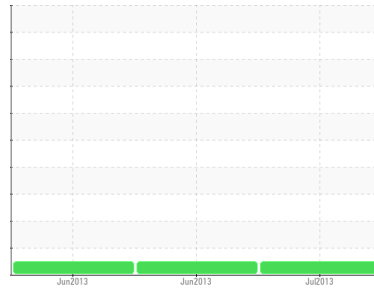

**NORMAL**



Area  
**RIG 8**  
 Machine Id  
**DRILLING RIG R8-L-01**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL 15W40 (10 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

#### Fluid Condition

The TBN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KLM2306826</b>	KLM2306603	KLM2306022
Sample Date	Client Info			<b>17 Jul 2013</b>	27 Jun 2013	07 Jun 2013
Machine Age	days	Client Info		<b>41472</b>	41452	41432
Oil Age	days	Client Info		<b>40</b>	20	0
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method			<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method			<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		<b>14</b>	5	2
Chromium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m		<b>0</b>	<1	0
Antimony	ppm	ASTM D5185m		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>3</b>	<1	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>34</b>	38	38
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>755</b>	734	796
Calcium	ppm	ASTM D5185m		<b>1282</b>	1129	1089
Phosphorus	ppm	ASTM D5185m		<b>974</b>	1000	962
Zinc	ppm	ASTM D5185m		<b>1085</b>	1080	1099
Sulfur	ppm	ASTM D5185m		<b>3761</b>	3491	3527


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<b>3</b>	3	5
Sodium	ppm	ASTM D5185m		<b>1</b>	2	5
Potassium	ppm	ASTM D5185m		<b>3</b>	0	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.2</b>	0.2	0
Nitration	Abs/cm	*ASTM D7624		<b>4.</b>	4.	4.
Sulfation	Abs./1mm	*ASTM D7415		<b>13.</b>	14.	14.




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

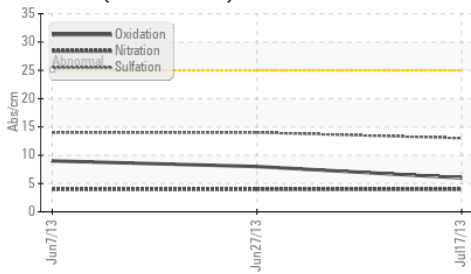

Base Number

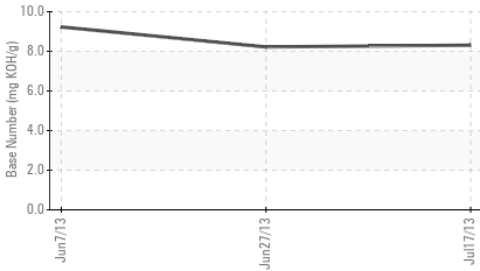

Viscosity @ 100°C

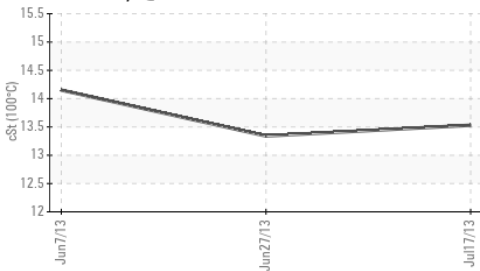


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>307</b>	615	602
Particles >6µm	ASTM D7647		<b>167</b>	335	328
Particles >14µm	ASTM D7647		<b>28</b>	57	55
Particles >21µm	ASTM D7647		<b>9</b>	19	18
Particles >38µm	ASTM D7647		<b>1</b>	2	2
Particles >71µm	ASTM D7647		<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)		<b>15/12</b>	16/13	16/13

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414		<b>6.</b>	8.	9.
Base Number (BN)	mg KOH/g ASTM D2896		<b>8.31</b>	8.22	9.23

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual		<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		<b>13.53</b>	13.34	14.15
Fluid Type	*In-house		<b>SAE_ENG_DE</b>	SAE_ENG_DE	SAE_ENG_DE

## GRAPHS

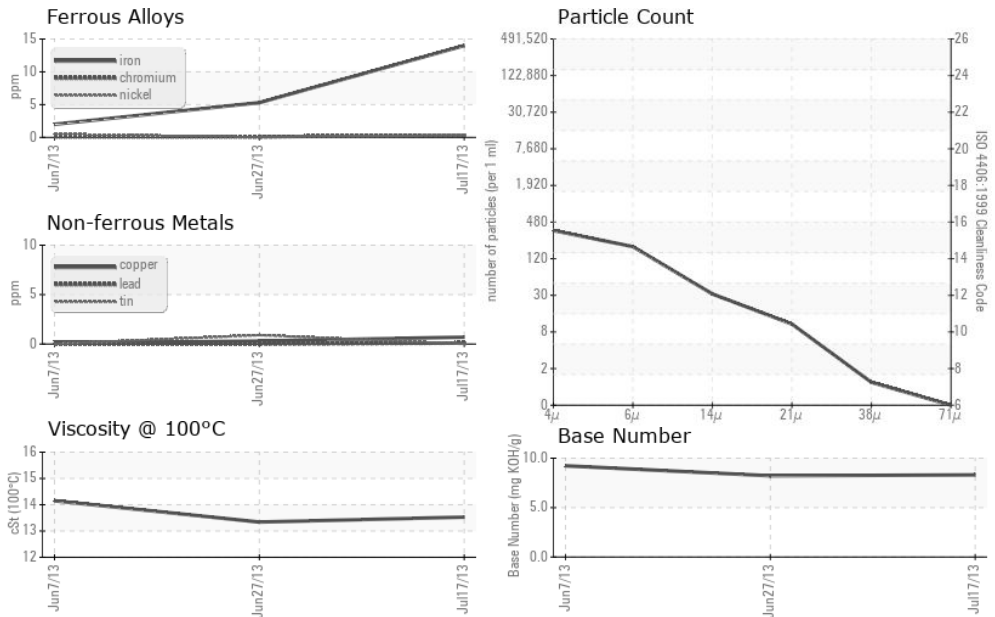

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KLM2306826  
**Lab Number** : 03327466  
**Unique Number** : 6330166  
**Test Package** : MOB 2 ( Additional Tests: FluidDetermination, PrtCount )  
**Received** : 24 Jul 2013  
**Tested** : 26 Jul 2013  
**Diagnosed** : 29 Jul 2013 - Jonathan Hester

**MCVAY DRILLING**  
 401 E BENDER BLVD  
 HOBBS, NM  
 US 88241

Contact: DOMINIK MENDOZA  
 dominik4819@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (575)393-8969  
 F: (575)393-7455