OIL ANALYSIS REPORT

Sample Rating Trend

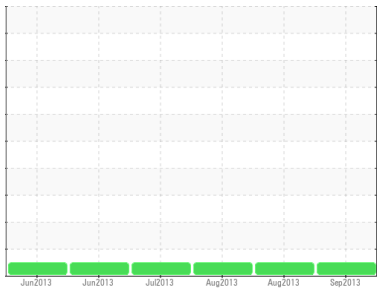

NORMAL

Area
RIG 8
Machine Id
DRILLING RIG R8-L-01
Component
Diesel Engine
Fluid
MOBIL 15W40 (10 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition
The TBN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**KLM2211599**	KLM2311656	KLM2312765
Sample Date		Client Info		**24 Sep 2013**	28 Aug 2013	07 Aug 2013
Machine Age	days	Client Info		**41541**	41514	41493
Oil Age	days	Client Info		**109**	82	61
Oil Changed		Client Info		**Not Changd**	Not Changd	Not Changd
Sample Status				**NORMAL**	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel		WC Method		**<1.0**	<1.0	<1.0
Water		WC Method		**NEG**	NEG	NEG
Glycol		WC Method		**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		**25**	40	24
Chromium	ppm	ASTM D5185m		**<1**	<1	<1
Nickel	ppm	ASTM D5185m		**<1**	<1	<1
Titanium	ppm	ASTM D5185m		**0**	0	<1
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m		**1**	1	<1
Lead	ppm	ASTM D5185m		**<1**	2	<1
Copper	ppm	ASTM D5185m		**4**	5	2
Tin	ppm	ASTM D5185m		**0**	<1	0
Antimony	ppm	ASTM D5185m		**1**	0	0
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**59**	21	5
Barium	ppm	ASTM D5185m		**0**	0	0
Molybdenum	ppm	ASTM D5185m		**34**	34	29
Manganese	ppm	ASTM D5185m		**2**	<1	<1
Magnesium	ppm	ASTM D5185m		**527**	584	613
Calcium	ppm	ASTM D5185m		**1534**	1413	1269
Phosphorus	ppm	ASTM D5185m		**926**	930	873
Zinc	ppm	ASTM D5185m		**957**	1046	1008
Sulfur	ppm	ASTM D5185m		**1720**	2351	3427

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		**2**	2	3
Sodium	ppm	ASTM D5185m		**1**	<1	1
Potassium	ppm	ASTM D5185m		**1**	<1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		**1.5**	1.2	0.2
Nitration	Abs/cm	*ASTM D7624		**7.**	6.	3.
Sulfation	Abs/.1mm	*ASTM D7415		**15.**	18.	12.

OIL ANALYSIS REPORT

FT-IR (Direct Trend)

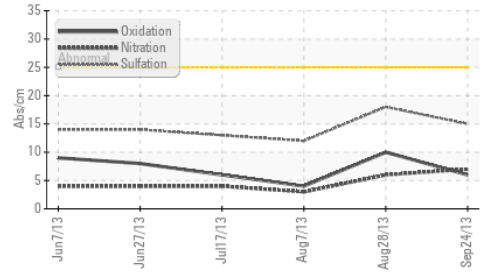

Base Number

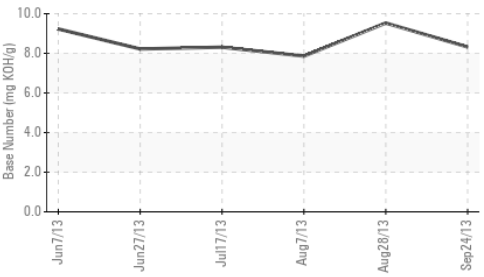

Viscosity @ 100°C

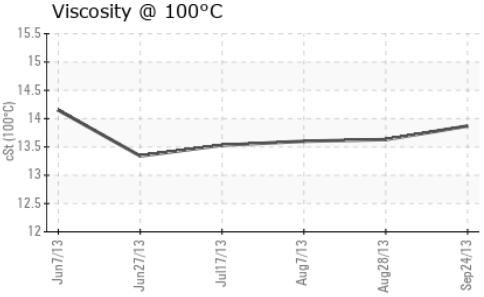

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		**2256**	346	974
Particles >6µm		ASTM D7647		**1229**	188	530
Particles >14µm		ASTM D7647		**209**	32	90
Particles >21µm		ASTM D7647		**70**	10	30
Particles >38µm		ASTM D7647		**10**	1	4
Particles >71µm		ASTM D7647		**1**	0	0
Oil Cleanliness		ISO 4406 (c)		**17/15**	15/12	16/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414		**6.**	10.	4.
Base Number (BN)	mg KOH/g	ASTM D2896		**8.32**	9.53	7.86

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual		**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445		**13.87**	13.63	13.6
Fluid Type		*In-house		***SAE_ENG_DE**	*SAE_ENG_DE	SAE_ENG_DE

GRAPHS

Ferrous Alloys

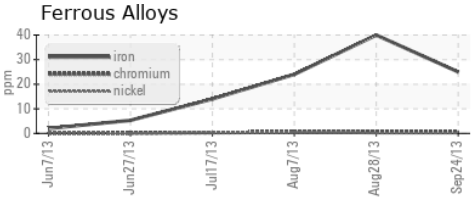

Non-ferrous Metals

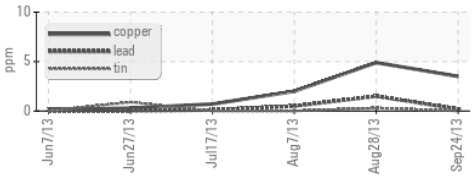

Viscosity @ 100°C

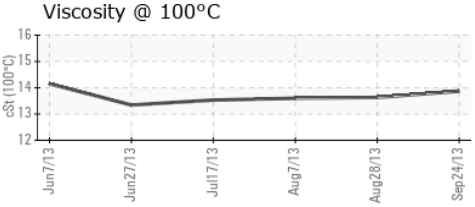

Particle Count

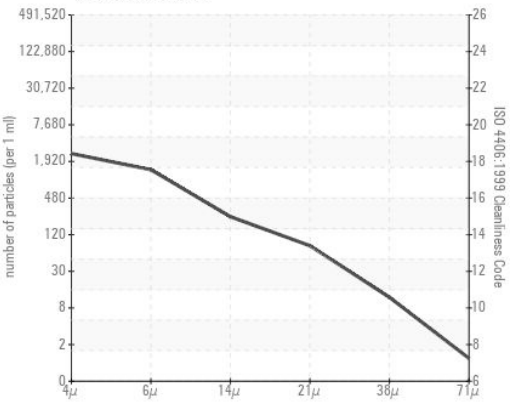

Base Number

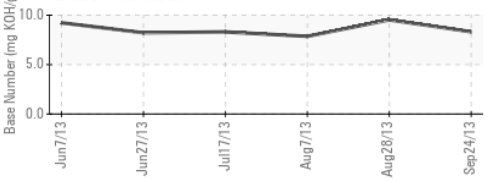

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KLM2211599
Lab Number : 03367529
Unique Number : 6395282
Test Package : MOB 2 (Additional Tests: FluidDetermination, PrtCount)
Received : 30 Sep 2013
Tested : 04 Oct 2013
Diagnosed : 04 Oct 2013 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MCVAY DRILLING
401 E BENDER BLVD
HOBBS, NM
US 88241
Contact: DOMINIK MENDOZA
dominik4819@yahoo.com
T: (575)393-8969
F: (575)393-7455

Report Id: MCVHOBKL [WUSCAR] 03367529 (Generated: 07/17/2024 14:32:45) Rev: 1
Contact/Location: DOMINIK MENDOZA - MCVHOBKL