




OIL ANALYSIS REPORT

Sample Rating Trend

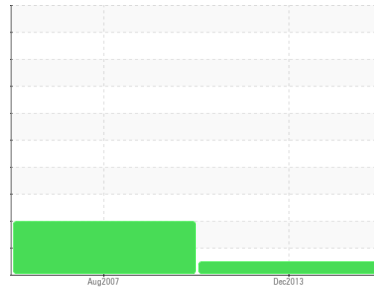

NORMAL



Machine Id

044634-A

Component

Hydraulic System

Fluid

CASTROL BRAYCO 717 (120 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC12218741	WC02010151	---
Sample Date	Client Info			05 Dec 2013	14 Aug 2007	---
Machine Age	cyc	Client Info		0	0	---
Oil Age	cyc	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>40	0	<1	---
Chromium	ppm	ASTM D5185m	>4	0	0	---
Nickel	ppm	ASTM D5185m		<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>4	0	0	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>60	0	0	---
Tin	ppm	ASTM D5185m	>4	0	0	---
Antimony	ppm	ASTM D5185m		0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		0	<1	---
Calcium	ppm	ASTM D5185m		0	<1	---
Phosphorus	ppm	ASTM D5185m		848	656	---
Zinc	ppm	ASTM D5185m		0	<1	---
Sulfur	ppm	ASTM D5185m		87	160	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	18	▲ 26	---
Sodium	ppm	ASTM D5185m		<1	1	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water	%	ASTM D6304	>0.05	0.004	0.009	---
ppm Water	ppm	ASTM D6304	>500	40	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	51	7788	---
Particles >6µm		ASTM D7647	>1300	27	▲ 4242	---
Particles >14µm		ASTM D7647	>160	4	▲ 722	---
Particles >21µm		ASTM D7647	>40	1	▲ 243	---
Particles >38µm		ASTM D7647	>10	0	▲ 37	---
Particles >71µm		ASTM D7647	>3	0	▲ 3	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	13/12/9	▲ 20/19/17	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.088	0.101	---



OIL ANALYSIS REPORT

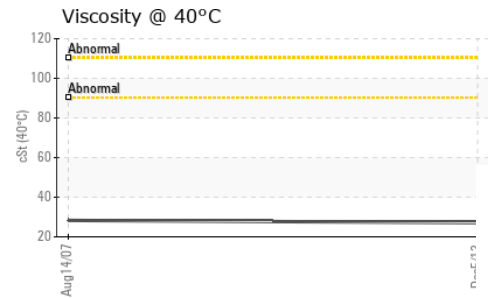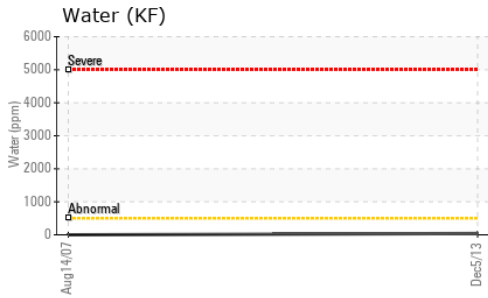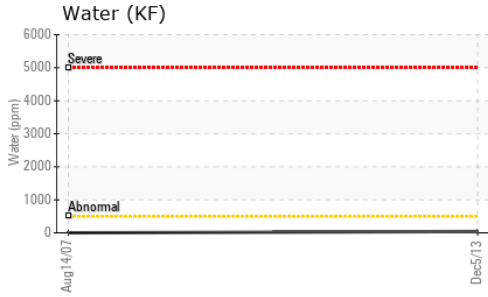






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	27.12	28.29	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

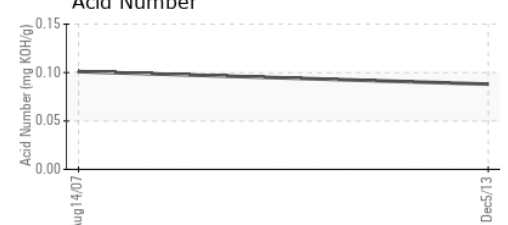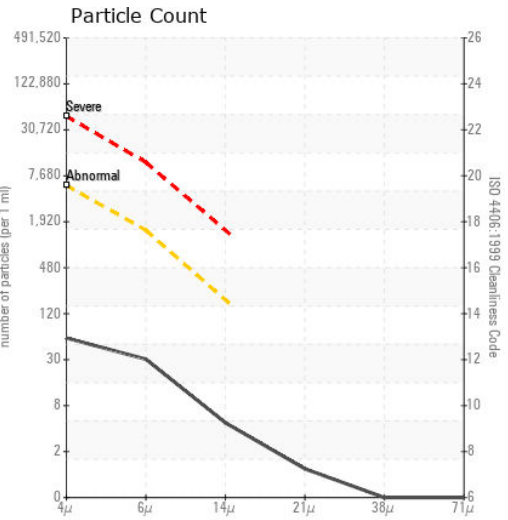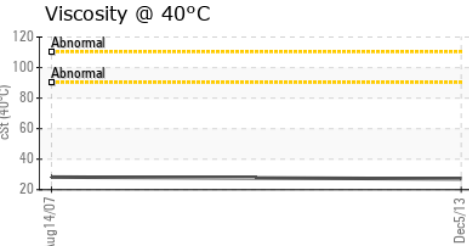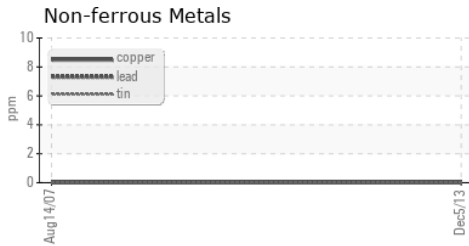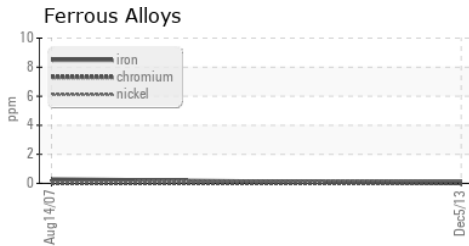

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC12218741 **Received** : 05 Dec 2013
Lab Number : 03409234 **Tested** : 06 Dec 2013
Unique Number : 6462016 **Diagnosed** : 06 Dec 2013 - Don Baldrige
Test Package : IND 2 (Additional Tests: KF)

BAE SYSTEMS
 163 ROCHESTER DR
 LOUISVILLE, KY
 US 40214

Contact: KEN MAHONEY
 ken.mahoney@baesystems.com
 T: (502)364-6439
 F: (502)364-5973

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)