




# PROBLEM SUMMARY

Sample Rating Trend


VISCOSITY

Area  
**[7193018]**  
 Machine Id  
**GARDNER DENVER C-2 (S/N M60451)**  
 Component  
**Compressor**  
 Fluid  
**GARDNER DENVER AEON 9000 TH (--- GAL)**

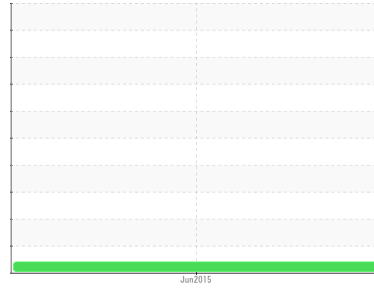

## COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

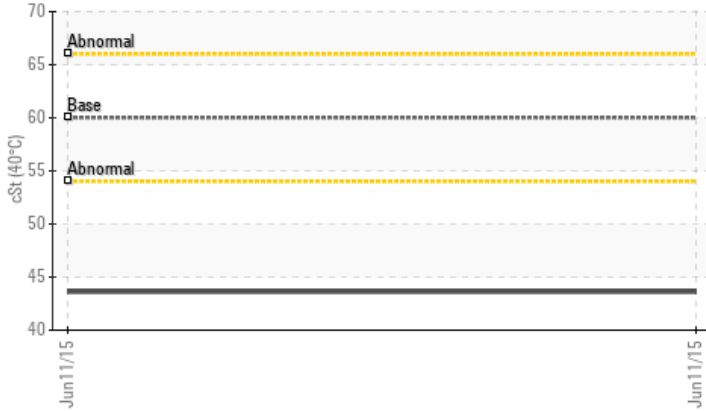

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ATTENTION		---	---		
Visc @ 40°C	cSt	ASTM D445	60.01	▲ 43.62	---	---

Customer Id: WESLONWC  
 Sample No.: WCI2209463  
 Lab Number: 03783380  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS




# OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area  
**[7193018]**  
 Machine Id  
**GARDNER DENVER C-2 (S/N M60451)**  
 Component  
**Compressor**  
 Fluid  
**GARDNER DENVER AEON 9000 TH (--- GAL)**

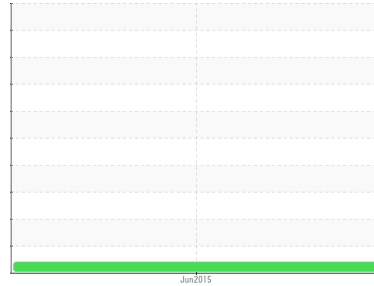

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system is acceptable. There is no indication of any contamination in the component.

### Fluid Condition

The oil viscosity is lower than normal. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

method	limit/base	current	history 1	history 2
Sample Number	Client Info	<b>WCI2209463</b>	---	---
Sample Date	Client Info	<b>11 Jun 2015</b>	---	---
Machine Age	hrs Client Info	<b>19484</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ATTENTION</b>	---	---

## WEAR METALS

method	limit/base	current	history 1	history 2
Iron ppm ASTM D5185m	>50	<b>&lt;1</b>	---	---
Chromium ppm ASTM D5185m	>10	<b>0</b>	---	---
Nickel ppm ASTM D5185m		<b>&lt;1</b>	---	---
Titanium ppm ASTM D5185m		<b>0</b>	---	---
Silver ppm ASTM D5185m		<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>25	<b>0</b>	---	---
Lead ppm ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper ppm ASTM D5185m	>50	<b>0</b>	---	---
Tin ppm ASTM D5185m	>15	<b>2</b>	---	---
Antimony ppm ASTM D5185m		<b>0</b>	---	---
Vanadium ppm ASTM D5185m		<b>0</b>	---	---
Cadmium ppm ASTM D5185m		<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history 1	history 2
Boron ppm ASTM D5185m		<b>&lt;1</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>0</b>	---	---
Manganese ppm ASTM D5185m		<b>0</b>	---	---
Magnesium ppm ASTM D5185m		<b>0</b>	---	---
Calcium ppm ASTM D5185m		<b>0</b>	---	---
Phosphorus ppm ASTM D5185m		<b>0</b>	---	---
Zinc ppm ASTM D5185m		<b>0</b>	---	---
Sulfur ppm ASTM D5185m		<b>0</b>	---	---

## CONTAMINANTS

method	limit/base	current	history 1	history 2
Silicon ppm ASTM D5185m	>25	<b>&lt;1</b>	---	---
Sodium ppm ASTM D5185m		<b>0</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>2</b>	---	---

## FLUID CLEANLINESS





method	limit/base	current	history 1	history 2
Particles >4µm ASTM D7647	>10000	<b>358</b>	---	---
Particles >6µm ASTM D7647	>2500	<b>195</b>	---	---
Particles >14µm ASTM D7647	>320	<b>33</b>	---	---
Particles >21µm ASTM D7647	>80	<b>11</b>	---	---
Particles >38µm ASTM D7647	>20	<b>1</b>	---	---
Particles >71µm ASTM D7647	>4	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>20/18/15	<b>16/15/12</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history 1	history 2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.079</b>	---	---



# OIL ANALYSIS REPORT

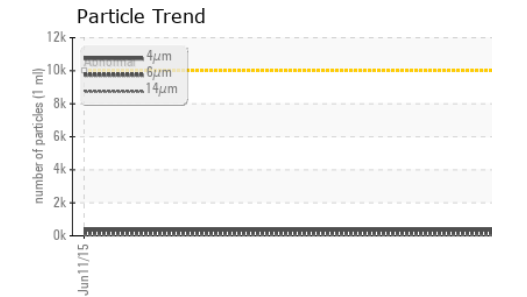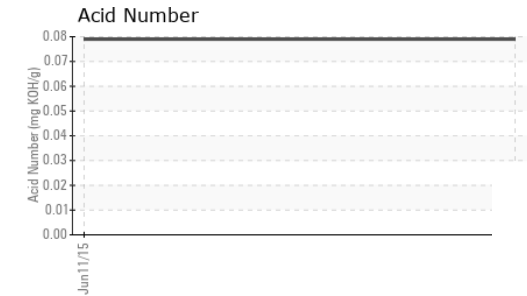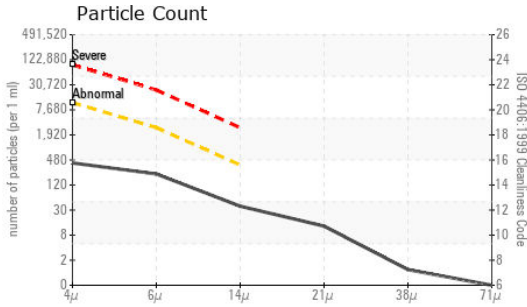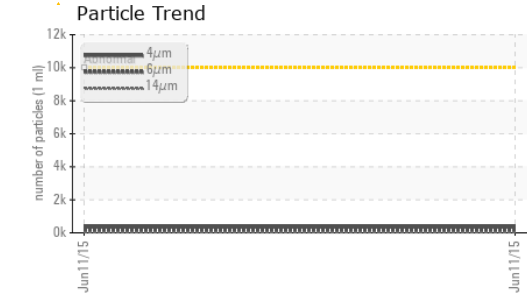

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC12209463 **Received** : 16 Jul 2015  
**Lab Number** : 03783380 **Diagnosed** : 20 Jul 2015  
**Unique Number** : 7071405 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history 1	history 2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	60.01 ▲ 43.62	---	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

