




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

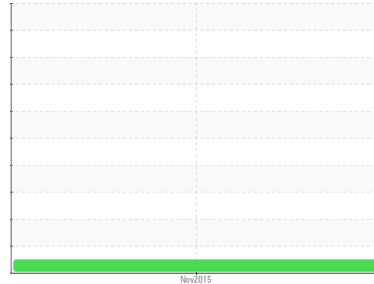

Machine Id
POCLAIN 1400T TWIN SCREW TRUCK MOUNT 1TM14074F

Component
Gearbox
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WCM113503	---	---
Sample Date	Client Info		02 Nov 2015	---	---
Machine Age	hrs	Client Info	1534	---	---
Oil Age	hrs	Client Info	1534	---	---
Oil Changed		Client Info	N/A	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >350	7	---	---
Chromium	ppm	ASTM D5185m >8	0	---	---
Nickel	ppm	ASTM D5185m >5	<1	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >30	0	---	---
Lead	ppm	ASTM D5185m >75	2	---	---
Copper	ppm	ASTM D5185m >125	2	---	---
Tin	ppm	ASTM D5185m >12	2	---	---
Antimony	ppm	ASTM D5185m	0	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	<1	---	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	6	---	---
Calcium	ppm	ASTM D5185m	97	---	---
Phosphorus	ppm	ASTM D5185m	317	---	---
Zinc	ppm	ASTM D5185m	405	---	---
Sulfur	ppm	ASTM D5185m	1515	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >90	3	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	2	---	---

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	1820	---	---
Particles >6µm	ASTM D7647	>5000	991	---	---
Particles >14µm	ASTM D7647	>640	168	---	---
Particles >21µm	ASTM D7647	>160	57	---	---
Particles >38µm	ASTM D7647	>40	8	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	18/17/15	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.599	---	---



OIL ANALYSIS REPORT


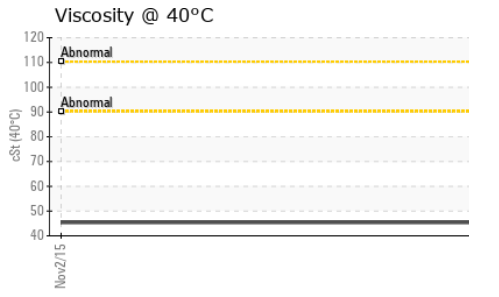
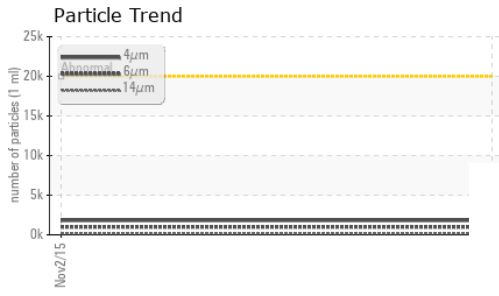
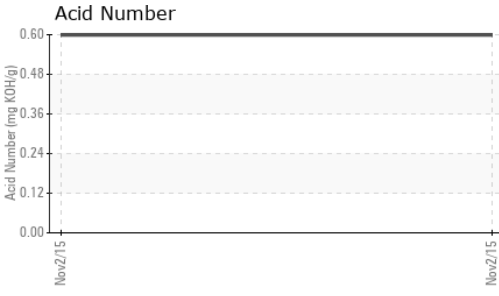
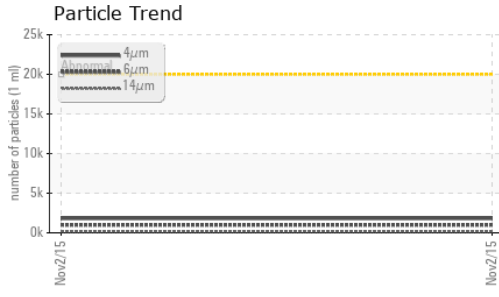


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.38	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

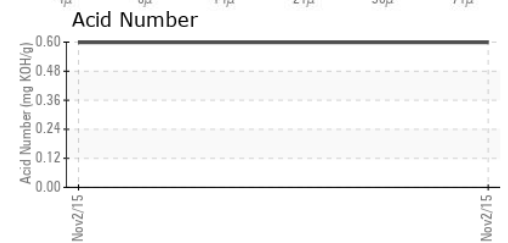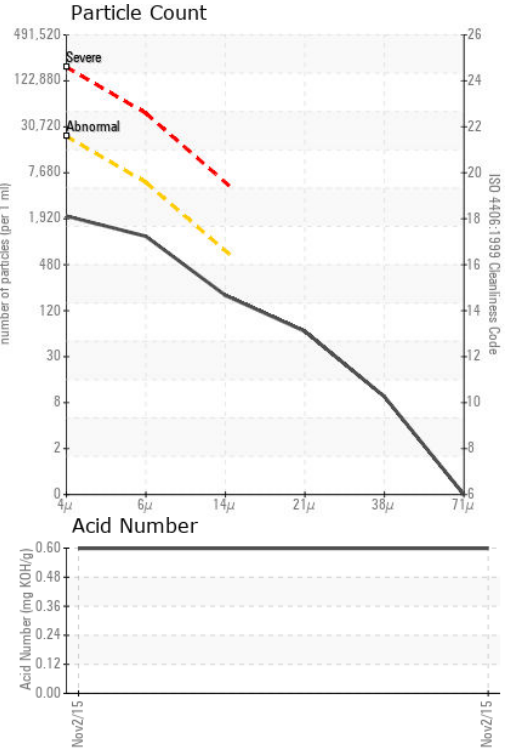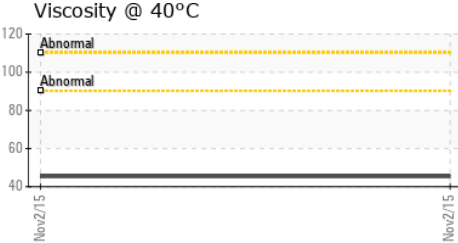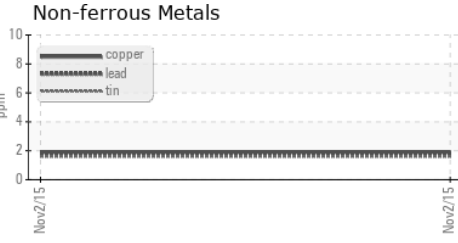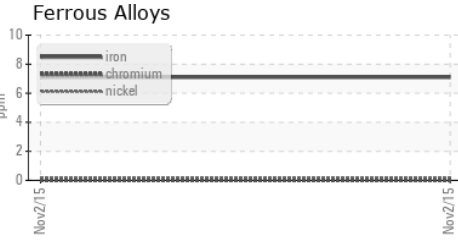

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCM113503 **Received** : 10 Nov 2015
Lab Number : **03860762** **Diagnosed** : 11 Nov 2015
Unique Number : 7200997 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: PrtCount)

PLYMOUTH DAIRY FARMS
 23505 5-49
 LEMARS, IA
 US 51031
 Contact: SERVICE MANAGER

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (712)546-4460
 F: