


OIL ANALYSIS REPORT

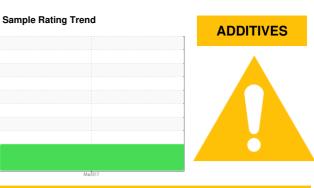

KAESER SFC 18ST 5333860 (S/N 1013)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

A Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC52542		
Sample Date		Client Info		28 Mar 2017		
Machine Age	hrs	Client Info		603		
Oil Age	hrs	Client Info		603		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	2		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	<1		
Antimony	ppm	ASTM D5185m		0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1		
Barium	ppm	ASTM D5185m	90	51		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	<u> </u>		
Calcium	ppm	ASTM D5185m	0	2		
Phosphorus	ppm	ASTM D5185m	0	<1		
Zinc	ppm	ASTM D5185m	0	6		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		15		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	0.029		
ppm Water	ppm	ASTM D6304	>500	290		

-COMPRESSORS Built for a lifetime.

OIL ANALYSIS REPORT

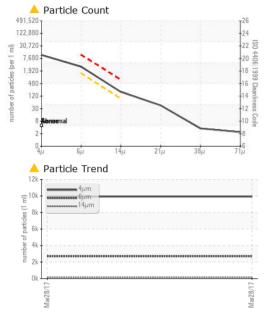



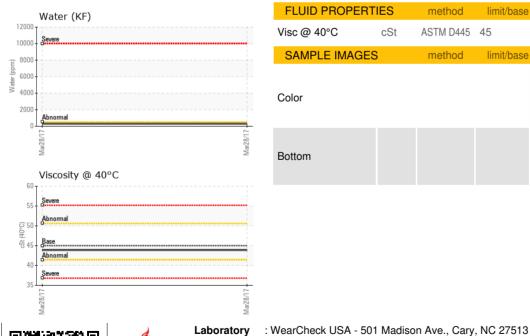

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9927		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	🔺 167		
Particles >21µm		ASTM D7647	>20	<mark>/</mark> 38		
Particles >38µm		ASTM D7647	>4	3		
Particles >71µm		ASTM D7647	>3	2		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>		
Particles 5-15µm	count	*NAS 1638	>1300	248207		
Particles 15-25µm	count	*NAS 1638	>80	12416		
Particles 25-50µm	count	*NAS 1638	>20	3340		
Particles 50-100µm	count	*NAS 1638	>4	62		
Particles >100µm	count	*NAS 1638	>3	194		
NAS Code		*NAS 1638	>/17/13	10		

FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.426		

Acid Nulliber (AN)	niy kon/y	ASTIVI DOU45	1.0	0.420		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	VLITE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	TIES	method	limit/base	current	history1	history2

/isc @ 40°C	cSt	ASTM D445	45

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

: 10 Apr 2017

: 11 Apr 2017

: 11 Apr 2017 - Don Baldridge

43.87



ALRO STEEL 4787 STATE RD CUYAHOGA FALLS, OH US 44223 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Test Package : IND 2 (Additional Tests: PrtCountNAS)

: KC52542

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

Diagnosed

Tested

Report Id: ALRCUY [WUSCAR] 04198714 (Generated: 02/23/2024 14:34:30) Rev: 1

Sample No.

Lab Number : 04198714

Unique Number : 7757135

Contact/Location: ? ? - ALRCUY

T:

F: