


OIL ANALYSIS REPORT



Area
DE Samples - CAT LAB
 Machine Id
CATERPILLAR 775F HAUL TRUCK 6835 (S/N DLS00972)
 Component
Diesel Engine
 Fluid
TULCO LUBSOIL CK-4 15W40 (--- GAL)

Sample Rating Trend

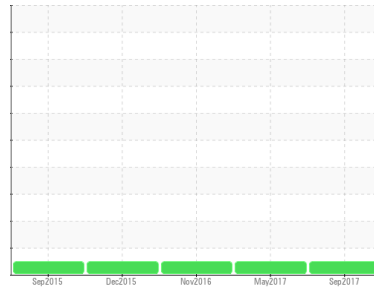

NORMAL

DIAGNOSIS

- Recommendation**
 Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is no indication of any contamination in the oil.
- Fluid Condition**
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO1005549	TO1006068	TO1005465
Sample Date	Client Info			09 Sep 2017	13 May 2017	18 Nov 2016
Machine Age	hrs Client Info			14673	14150	13272
Oil Age	hrs Client Info			500	500	300
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	16	12	26
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>25	<1	1	2
Lead	ppm	ASTM D5185m	>40	<1	0	<1
Copper	ppm	ASTM D5185m	>330	2	2	6
Tin	ppm	ASTM D5185m	>15	<1	9	0
Antimony	ppm	ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		27	133	3
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	65	59	70	60
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	1060	834	723	918
Calcium	ppm	ASTM D5185m	1140	984	1223	1075
Phosphorus	ppm	ASTM D5185m	1170	930	901	958
Zinc	ppm	ASTM D5185m	1230	1064	1132	1085
Sulfur	ppm	ASTM D5185m	3130	1689	2828	2576

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	2	3
Sodium	ppm	ASTM D5185m		1	4	1
Potassium	ppm	ASTM D5185m	>20	0	<1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.2	0.5
Nitration	Abs/cm	*ASTM D7624		5.	5.	6.
Sulfation	Abs/.1mm	*ASTM D7415		12.	16.	16.

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414		11.	9.	10.
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	8.79	8.55	9.01









OIL ANALYSIS REPORT

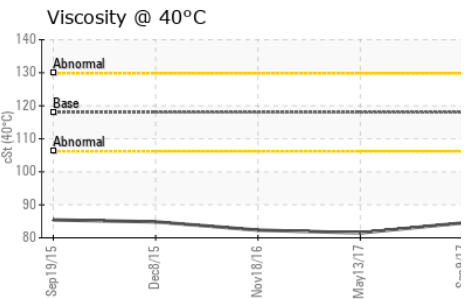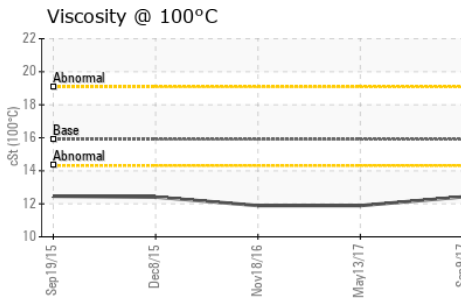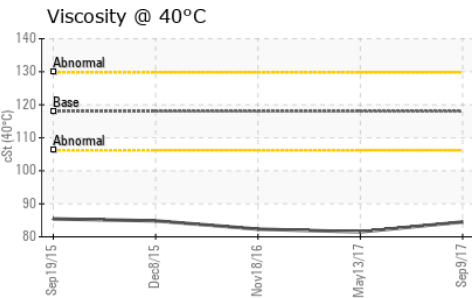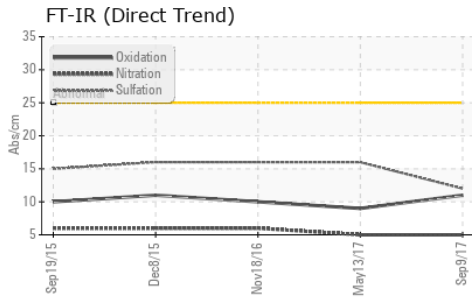

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	118	84.5	81.51
Visc @ 100°C	cSt	ASTM D445	15.9	12.42	11.89
Viscosity Index (VI)	Scale	ASTM D2270	143	139	137

GRAPHS

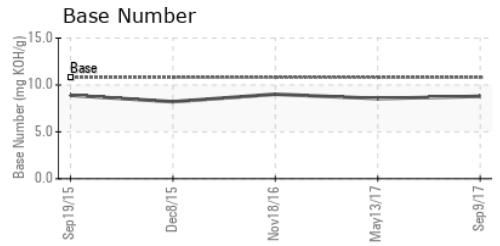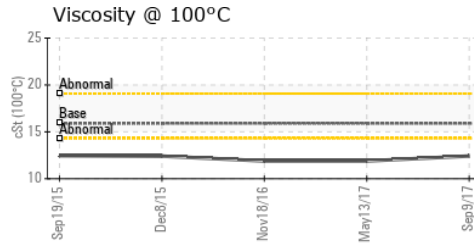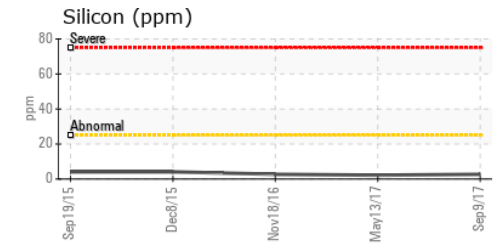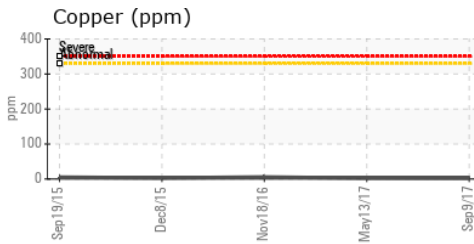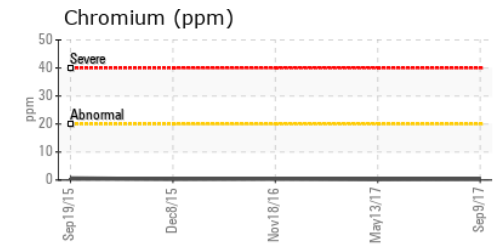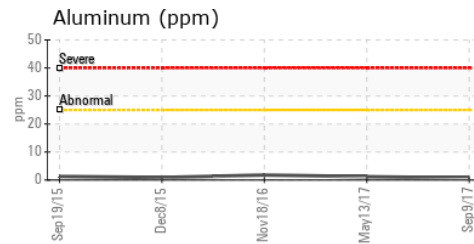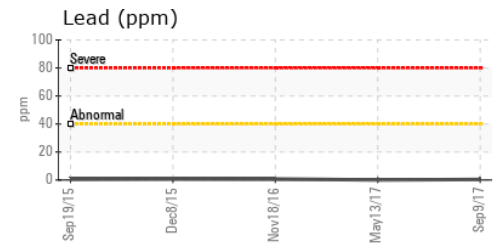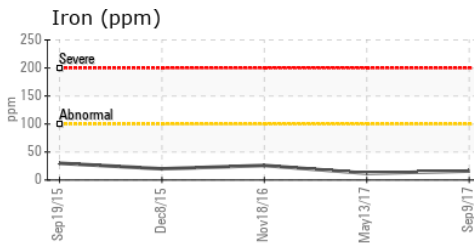

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO1005549
Lab Number : 04305332
Unique Number : 7928870
Test Package : MOB 2 (Additional Tests: KV40, VI)

Received : 15 Sep 2017
Tested : 18 Sep 2017
Diagnosed : 18 Sep 2017 - Wes Davis

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

Contact: DAVID MORRIS
 dmorris@anchorstoneco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)