



# PROBLEM SUMMARY

Sample Rating Trend




ADDITIVES



Machine Id  
**KAESER DSD250 6420064 (S/N 1076)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

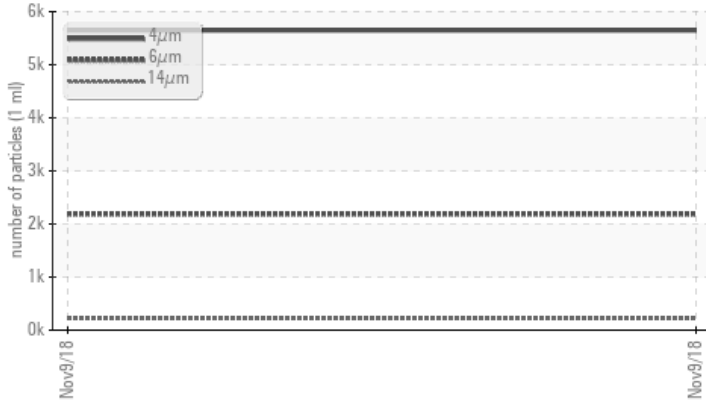

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Barium	ppm	ASTM D5185m	90	▲ 9	---	---
Particles >6µm		ASTM D7647	>1300	▲ 2187	---	---
Particles >14µm		ASTM D7647	>80	▲ 217	---	---
Particles >21µm		ASTM D7647	>20	▲ 61	---	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 18/15	---	---

Customer Id: MASMID  
 Sample No.: KC75416  
 Lab Number: 04597600  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Angela Borella +1 800-237-1369  
[angela.borella@wearcheckusa.com](mailto:angela.borella@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS

# OIL ANALYSIS REPORT

Sample Rating Trend



**ADDITIVES**



Machine Id  
**KAESER DSD250 6420064 (S/N 1076)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

**DIAGNOSIS**

**▲ Recommendation**

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**▲ Contamination**

There is a high amount of particulates present in the oil.

**▲ Fluid Condition**

An additive depletion is indicated. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC75416</b>	---	---
Sample Date	Client Info			<b>09 Nov 2018</b>	---	---
Machine Age	hrs	Client Info		<b>3057</b>	---	---
Oil Age	hrs	Client Info		<b>3057</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>4</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185m		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	90	<b>▲ 9</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	100	<b>37</b>	---	---
Calcium	ppm	ASTM D5185m	0	<b>1</b>	---	---
Phosphorus	ppm	ASTM D5185m	0	<b>4</b>	---	---
Zinc	ppm	ASTM D5185m	0	<b>4</b>	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Sodium	ppm	ASTM D5185m		<b>10</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>16</b>	---	---
Water	%	ASTM D6304	>0.05	<b>0.017</b>	---	---
ppm Water	ppm	ASTM D6304	>500	<b>170</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>5647</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 2187</b>	---	---
Particles >14µm		ASTM D7647	>80	<b>▲ 217</b>	---	---
Particles >21µm		ASTM D7647	>20	<b>▲ 61</b>	---	---
Particles >38µm		ASTM D7647	>4	<b>2</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>▲ 18/15</b>	---	---


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.371</b>	---	---

# OIL ANALYSIS REPORT


## ▲ Particle Trend

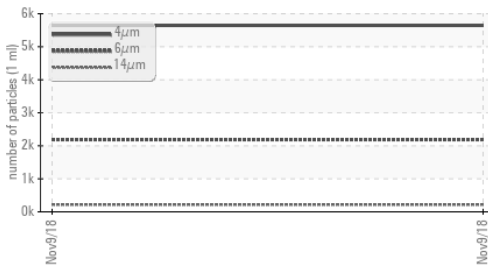

## Water (KF)

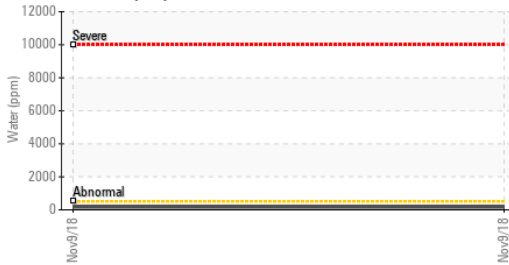


## Acid Number

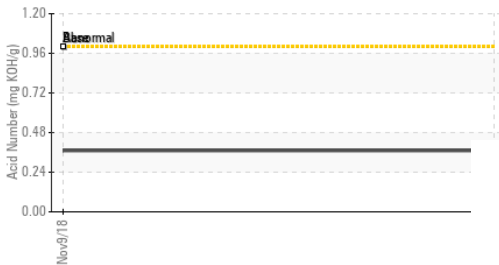

## Water (KF)



## Viscosity @ 40°C

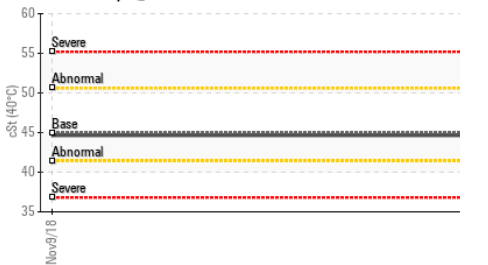

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	VLITE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.64	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color				no image	no image
Bottom				no image	no image

## GRAPHS


### Ferrous Alloys




### Non-ferrous Metals

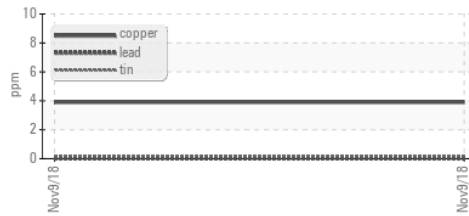

### Viscosity @ 40°C

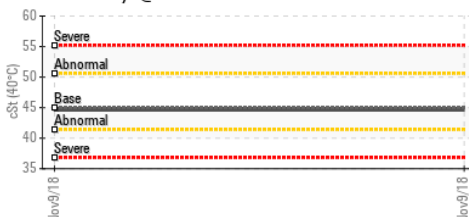

### ▲ Particle Count

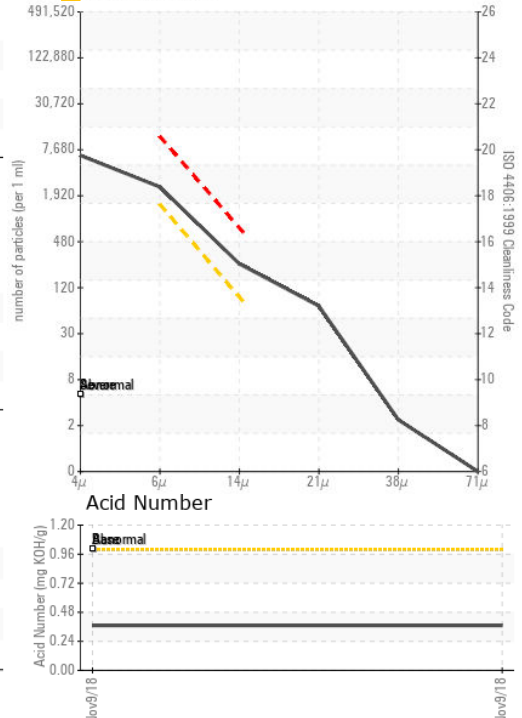

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC75416 **Received** : 21 Nov 2018  
**Lab Number** : 04597600 **Diagnosed** : 26 Nov 2018  
**Unique Number** : 8406591 **Diagnostician** : Angela Borella  
**Test Package** : IND 2

**MASCO CABINetry LLC PLANT 1**  
 16052 INDUSTRIAL PARKWAY  
 MIDDLEFIELD, OH  
 US 44062  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: