




PROBLEM SUMMARY

Sample Rating Trend


ISO

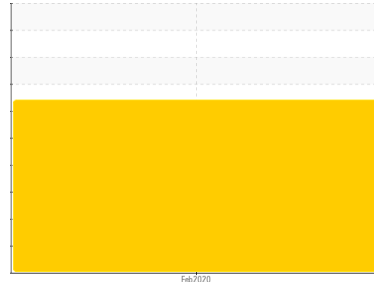

Area
P1
Machine Id
3210 P-1 Centrifuge
Component
Hydraulic System
Fluid
MOBIL DTE 25 (20 GAL)

COMPONENT CONDITION SUMMARY

Particle Trend

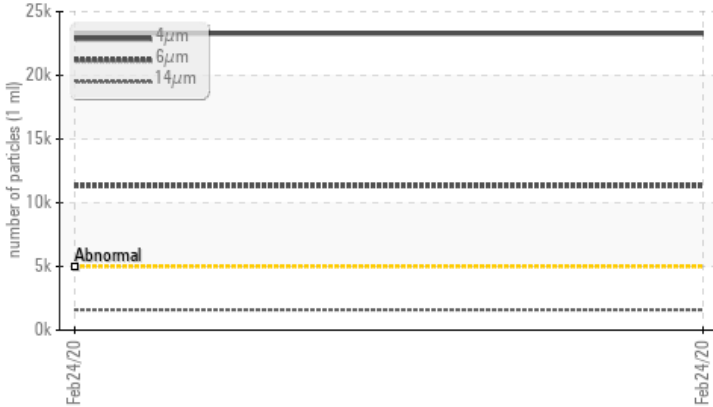

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: Filter on hydraulic motor sump reached high d/p alarm. Changed the filter for the first time in over 5 years, fluid is less than a year old)

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	---	---
Particles >4µm	ASTM D7647	>5000	▲ 23287	---	---
Particles >6µm	ASTM D7647	>1300	● 11326	---	---
Particles >14µm	ASTM D7647	>160	● 1598	---	---
Particles >21µm	ASTM D7647	>40	● 531	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	● 22/21/18	---	---

Customer Id: AJIRAL
Sample No.: WC0425045
Lab Number: 04920863
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Area
P1
 Machine Id
3210 P-1 Centrifuge
 Component
Hydraulic System
 Fluid
MOBIL DTE 25 (20 GAL)

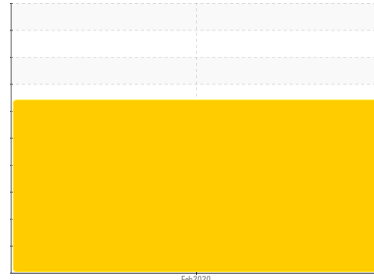

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: Filter on hydraulic motor sump reached high d/p alarm. Changed the filter for the first time in over 5 years, fluid is less than a year old)

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0425045	---	---
Sample Date	Client Info	24 Feb 2020	---	---
Machine Age	hrs	Client Info	0	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	Filtered	---	---
Sample Status		SEVERE	---	---

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	8	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>20	1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	2	---	---
Copper	ppm	ASTM D5185m	>20	13	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Antimony	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		<1	---	---

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		129	---	---
Phosphorus	ppm	ASTM D5185m		478	---	---
Zinc	ppm	ASTM D5185m		726	---	---
Sulfur	ppm	ASTM D5185m		6314	---	---

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	0	---	---
Sodium	ppm	ASTM D5185m		4	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water	%	ASTM D6304	>0.05	0.011	---	---
ppm Water	ppm	ASTM D6304	>500	110	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>5000	23287	---	---
Particles >6µm	ASTM D7647	>1300	11326	---	---
Particles >14µm	ASTM D7647	>160	1598	---	---
Particles >21µm	ASTM D7647	>40	531	---	---
Particles >38µm	ASTM D7647	>10	13	---	---
Particles >71µm	ASTM D7647	>3	1	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	22/21/18	---	---


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045		1.001	---	---




OIL ANALYSIS REPORT


Particle Trend

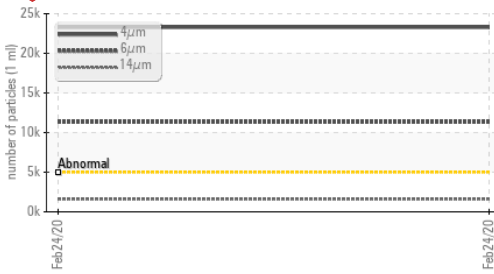


Water (KF)

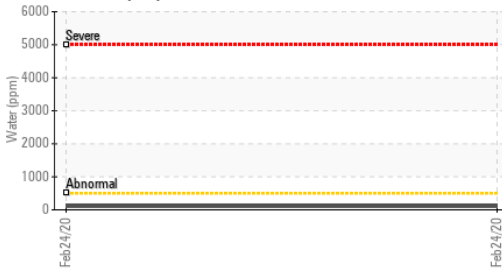


Acid Number

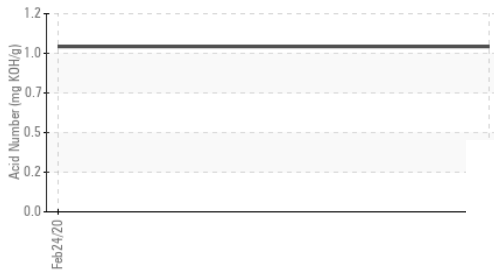

Water (KF)

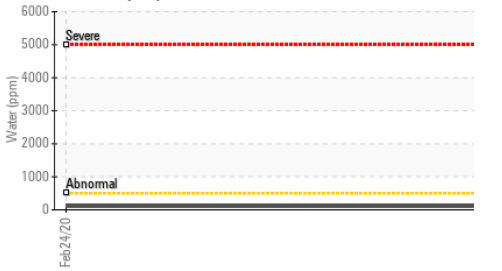

Viscosity @ 40°C

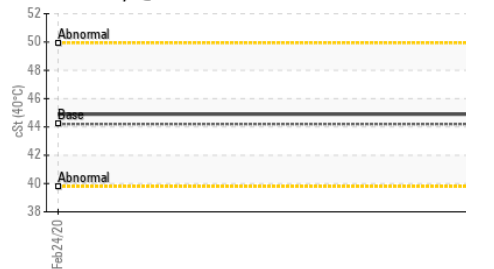





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.2	44.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

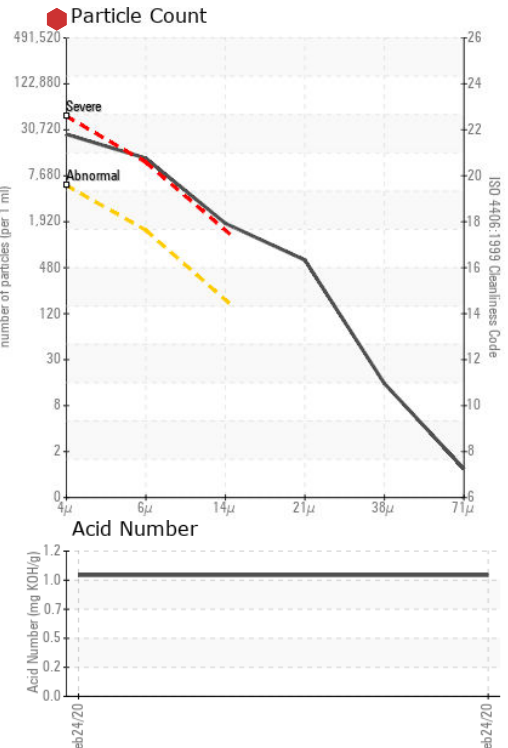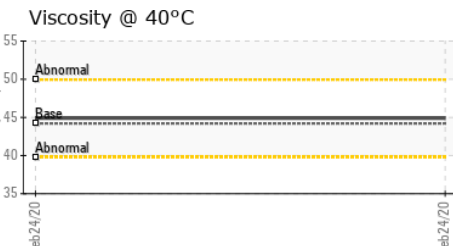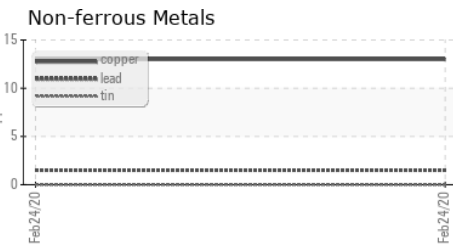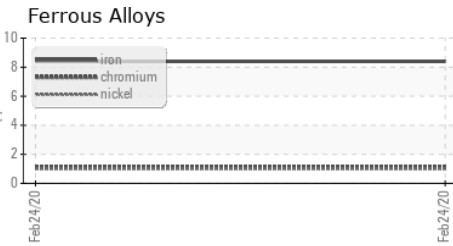

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0425045 Recieved : 26 Feb 2020
 Lab Number : 04920863 Diagnosed : 27 Feb 2020
 Unique Number : 8935942 Diagnostician : Doug Bogart
 Test Package : IND 2 (Additional Tests: KF)

AJINOMOTO USA
 4020 AJINOMOTO DRIVE
 RALEIGH, NC
 US 27610
 Contact: Michael Thompson
 thompsonm@ajiusa.com
 T: (919)723-2142
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)