


OIL ANALYSIS REPORT

Sample Rating Trend

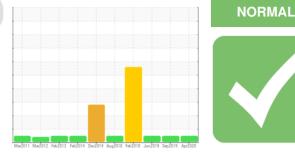

Machine Id

A-81 Component Wind Turbine Gearbox Fluid MITSUBISHI Daphne Alpha Winforce (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		MHI017688	MHI019052	MHI023810
Sample Date		Client Info		09 Apr 2020	27 Sep 2019	07 Jun 2019
Machine Age	hrs	Client Info		0	0	88841
Oil Age	hrs	Client Info		95185	91018	0
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>200	11	13	23
Iron	ppm	ASTM D5185m		25	29	25
Chromium	ppm	ASTM D5185m		<1	<1	<1
Nickel	ppm	ASTM D5185m		<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m		0	<1	0
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m	>75	3	5	3
Tin	ppm	ASTM D5185m		0	<1	<1
Antimony	ppm	ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1	<1	191
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		1	<1	0
Phosphorus	ppm	ASTM D5185m		296	367	370
Zinc	ppm	ASTM D5185m		4	0	1
Sulfur	ppm	ASTM D5185m		3684	4784	5831
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+30	2	3	1
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.1	0.002	0.007	0.007
ppm Water	ppm	ASTM D6304	>1000	17.2	73.6	70
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2634	13774	2247
Particles >6µm		ASTM D7647	>5000	562	874	533
Particles >14µm		ASTM D7647	>640	39	28	39
Particles >21µm		ASTM D7647	>160	8	9	11
Particles >38µm		ASTM D7647	>40	0	1	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/19/16	19/16/12	21/17/12	18/16/12



Water (KF)

Aar6/12 Mar4/1

Feb13/13

Feb13/13

Viscosity @ 40°C

Mar6/1 Mar4

Feb 19/14

Particle Trend

- Ha

PQ

/Jar4

25 Ê 20 particles (

5 10

0

400 380

360

(; 340 € 320

200 200

280 260 Ab

240

40

350 300

250

150

100

50

Mar4/1

PQ

AF 립200

-h12/1

In12/1

12000

10000 800 Water (ppm) 600

400

2000 Abn

400


350 300

250

OIL ANALYSIS REPORT

FLUID DEGRADATION		method	limit/base	current	history1
Acid Number (AN)	mg KOH/g	ASTM D8045		0.873	0.829
VISUAL		method	limit/base	current	history1
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG
FLUID PROPER	TIES	method	limit/base	current	history1
Visc @ 40°C	cSt	ASTM D445		324	326
SAMPLE IMAGES		method	limit/base	current	history1

Color



0.800

NONE

NONE

NONE NONE

NONE NONE

NORML


NORML

NEG

NEG

325

Bottom

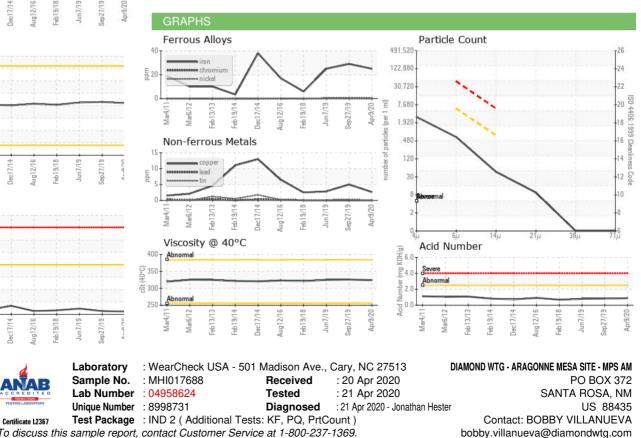

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MITSANNM [WUSCAR] 04958624 (Generated: 05/21/2024 02:19:41) Rev: 1

Contact/Location: BOBBY VILLANUEVA - MITSANNM

Page 2 of 2

T: x:

F: x: