

## **OIL ANALYSIS REPORT**

Sample Rating Trend



P3 Machine Id 3521-C P3 evaporator

Component Agitator Gearbox

MOBIL MOBILGEAR 600 XP ISO 150 (16 QTS)

## DIAGNOSIS

## Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0472485		
Sample Date		Client Info		28 Aug 2020		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	4		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	0		
Copper	ppm	ASTM D5185m	>50	0		
Tin	ppm	ASTM D5185m	>10	0		
Antimony	ppm	ASTM D5185m		3		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		15		
Barium	ppm	ASTM D5185m		3		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		9		
Phosphorus	ppm	ASTM D5185m		321		
Zinc	ppm	ASTM D5185m		23		
Sulfur	ppm	ASTM D5185m		13728		
CONTAMINANTS		method	limit/base	current	history1	history2
						-
Silicon	ppm	ASTM D5185m	>50	0		
Sodium	ppm	ASTM D5185m	00	<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water ppm Water	%	ASTM D6304 ASTM D6304		0.009		
	ppm			96.2		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ 22045 1202		
Particles >6µm		ASTM D7647	>5000	1293		
Particles >14µm		ASTM D7647	>640	15		
Particles >21µm		ASTM D7647		3		
Particles >38µm		ASTM D7647	>40	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>22/17/11</b>		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.807		

Report Id: AJIRAL [WUSCAR] 05059222 (Generated: 01/24/2024 13:55:14) Rev: 1

Submitted By: Michael Thompson



# **OIL ANALYSIS REPORT**

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

149

----

no image

no image


no image

no image

4406

:1999 Cle

14

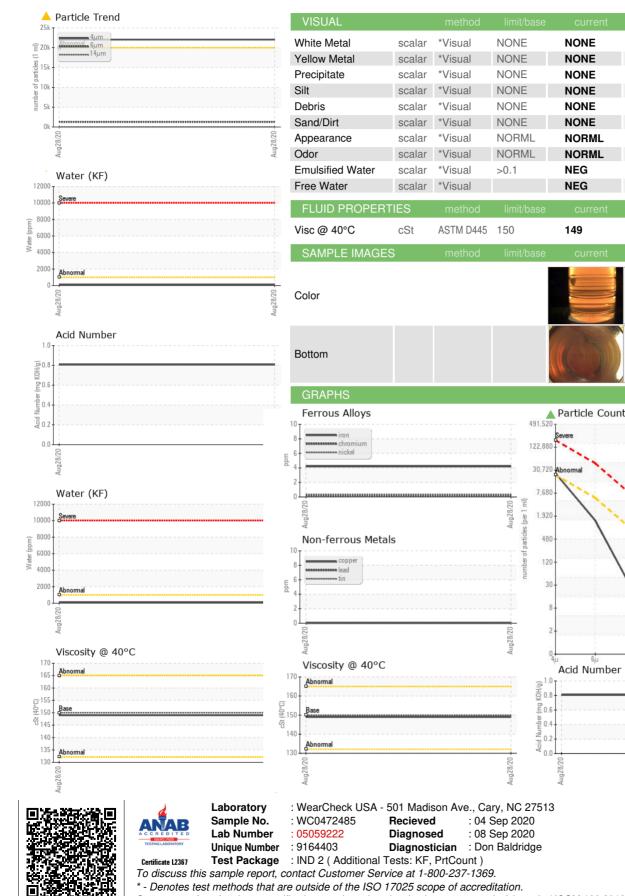

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Michael Thompson

214

Page 2 of 2

AJINOMOTO USA

RALEIGH, NC

T: (919)723-2142

US 27610

F:

4020 AJINOMOTO DRIVE

Contact: Michael Thompson

thompsonm@ajiusa.com