




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/EG - BACKHOE LOADER
 Machine Id
53.515L [OKLAHOMA^102^EG - BACKHOE LOADER]
 Component
Front Left Final Drive
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

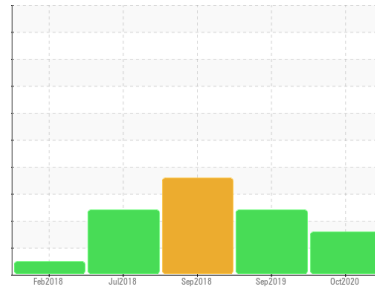

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear
 Bearing and/or bushing wear is indicated.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0511903	WC0384954	WCCF4337
Sample Date	Client Info			05 Oct 2020	10 Sep 2019	26 Sep 2018
Machine Age	hrs	Client Info		3888	3002	1952
Oil Age	hrs	Client Info		0	1000	1000
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	55	43	87
Chromium	ppm	ASTM D5185m	>10	<1	<1	2
Nickel	ppm	ASTM D5185m		2	2	2
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	1	1	1
Lead	ppm	ASTM D5185m	>25	22	▲ 20	▲ 23
Copper	ppm	ASTM D5185m	>50	▲ 265	▲ 256	▲ 412
Tin	ppm	ASTM D5185m	>10	▲ 28	▲ 27	▲ 24
Antimony	ppm	ASTM D5185m		0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		40	32	26
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		13	10	16
Calcium	ppm	ASTM D5185m		3002	2977	2938
Phosphorus	ppm	ASTM D5185m		976	909	876
Zinc	ppm	ASTM D5185m		1197	1205	1038
Sulfur	ppm	ASTM D5185m		4401	4203	5352

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	8	9	13
Sodium	ppm	ASTM D5185m		2	3	5
Potassium	ppm	ASTM D5185m	>20	2	4	8

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	MODER	▲ HEAVY
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT







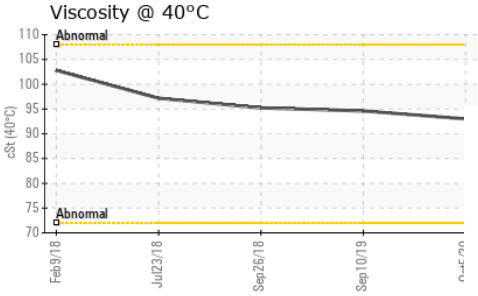
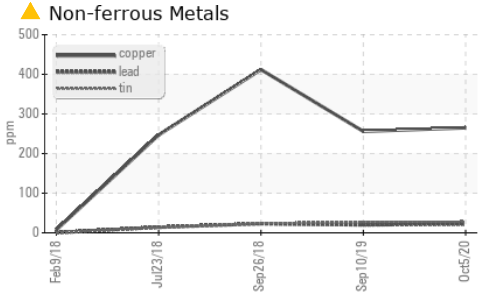


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	93.0	94.6	95.22

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

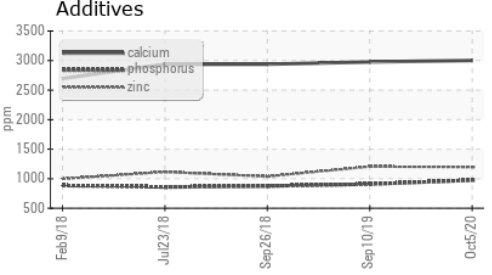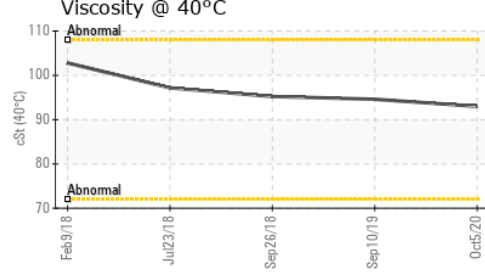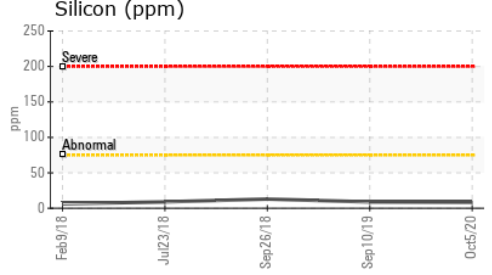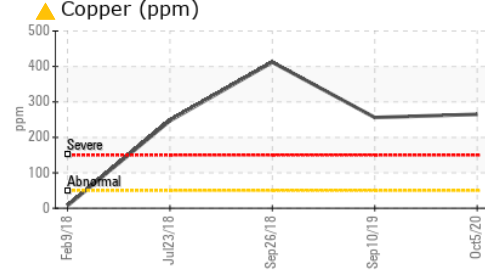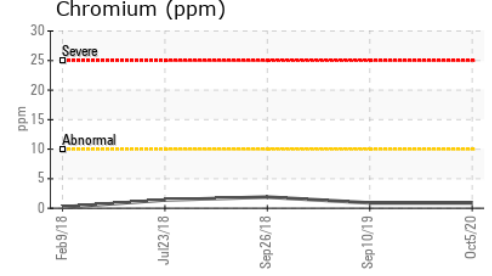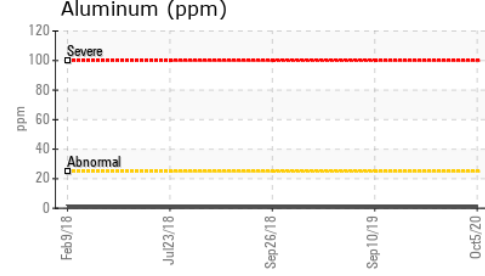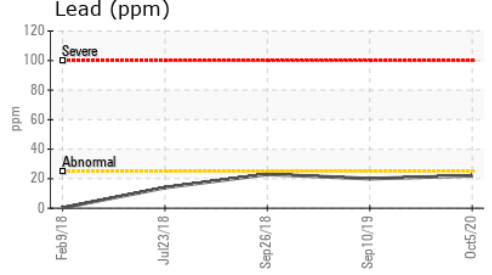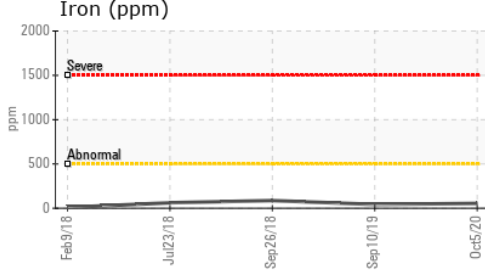

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0511903 **Received** : 09 Oct 2020
Lab Number : 05086777 **Tested** : 12 Oct 2020
Unique Number : 9207013 **Diagnosed** : 16 Oct 2020 - Jonathan Hester
Test Package : MOBCE

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)